



Quick Start Guide


TWR-LCDC-EPSON

Epson Display Controller Module



TOWER SYSTEM

Get to know the TWR-LCDC-EPSON

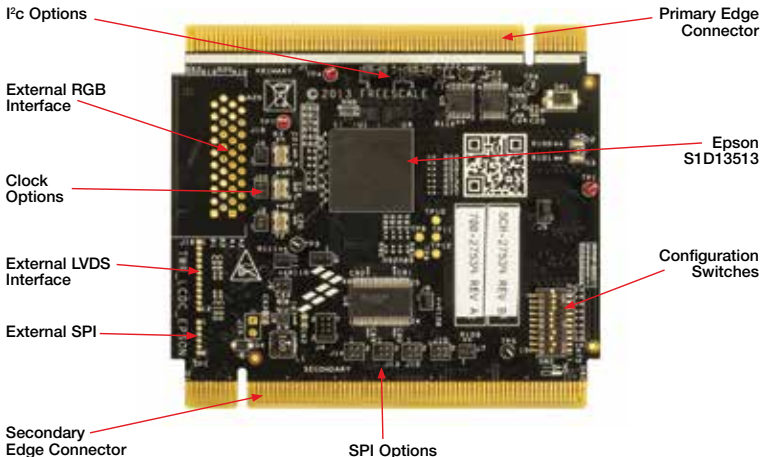

TWR-LCDC-EPSON Freescale Tower System

The TWR-LCDC-EPSON module is part of the Freescale Tower System portfolio, a modular development platform that enables rapid prototyping and tool re-use through reconfigurable hardware. Elevate your design to the next level with this industrial powerhouse by building your Tower System today.

TWR-LCDC-EPSON Features

- Features the Epson S1D13513 display controller
- Onboard SDRAM
- Interfaces with a Tower System controller module via the parallel external memory interface (EBI)
- Interfaces directly with the TWR-LCD-RGB
- Optional interfaces for externally connected RGB or LVDS display panels
- Selectable SPI and I²C pass-through interfaces for LCD/touch configurations

Step-by-Step Installation Instructions

1 Assemble the Tower System

The default example application assumes the following Tower assembly: TWR-ELEV + TWR-K60D100M + TWR-LCD-RGB + TWR-LCDC-EPSON

Ensure that the Tower System modules are properly aligned to the primary and secondary edges, with the TWR-LCD-RGB attached to the secondary side.

2 Program the Tower System Controller

Using an IDE compatible with the TWR-K60D100M, such as CodeWarrior, follow the respective flashing instruction included with the default example application.

3 Interact with the Graphical User Interface

The default example application features a simple GUI developed using PEG and featuring the CRTouch to provide touch inputs.

4 Learn More

Refer to freescale.com/TWR-LCDC-EPSON for additional information, including a request link for a PEG evaluation based on the TWR-LCDC-EPSON pre-compiled PEG library.

I VWR-LCDC-EPSON Jumper Settings

| Jumper | Option | Setting | Description |
|--------|--------------------------------------|---------|--|
| J2 | 27 MHz OSC Disable | 1-2 | Disables the onboard 27 MHz oscillator connected to S1D13513 OSCI2 |
| J3 | 10 MHz OSC Disable | 1-2 | Disables the onboard 10 MHz oscillator connected to S1D13513 CLKI3 |
| J4 | External LED Backlight Configuration | 1-2 | Disables external LED Backlight (signals routed to J15 for off-board use) |
| | | 3-4 | 3-4 short, 5-6 open, 7-8 open: 20 mA load |
| | | 5-6 | 3-4 short, 5-6 short, 7-8 open: 40 mA load |
| | | 7-8 | 3-4 short, 5-6 short, 7-8 short: 60 mA load |
| J5 | SDRAM Width Select | 1-2 | x32 SDRAM (32 MB) |
| | | 2-3 | X64 SDRAM (64 MB) |
| J6 | Enable RGB Interface | 1-2 | Enables the RGB interface to the Tower System elevator, additionally signals are routed to J19 for off-board use |
| J7 | LCD Enable Signal (TWR-LCD-RGB) | 1-2 | LCD enable signal for the TWR-LCD-RGB. J7 is actively pulled high, shunting connects the LCD enable to GND |

I VVR-LCDC-EPSON Jumper Settings

Continued

| Jumper | Option | Setting | Description |
|--------|------------------------------------|---------|--|
| J8 | SPI CS Inverter Enable | 1-2 | Inverts the S1D13513 GPIO0 signal (refer to the S1D1513 for usage details) |
| | | 2-3 | Direct connection of the S1D13513 GPIO0 signal |
| J9 | External LVDS Data Strobe Polarity | 1-2 | Unshunted: Rising edge data strobe Shunted: Falling edge data strobe |
| J10 | SPI CS Routing Configuration | 1-2 | Routes the S1D13513 GPIO0 signal to JP1 (pin 1) for off-board use |
| | | 3-4 | Routes the primary elevator SPI1 to the secondary elevator SPI2 |
| | | 1-3 | Routes the S1D13513 GPIO0 signal to secondary elevator SPI2 CS |
| | | 2-4 | Routes the primary elevator SPI1 CS to JP1 (pin 1) for off-board use |
| J11 | External LVDS Disable | 1-2 | Disables the LVDS transmitter (signals routed to J16 for off-board use) |

I VVR-LCDC-EPSON Jumper Settings

Continued

| Jumper | Option | Setting | Description |
|--------|--------------------------------|---------|--|
| J12 | SPI CLK Routing Configuration | 1-2 | Routes the S1D13513 GPIO1 signal to JP1 (pin 2) for off-board use |
| | | 3-4 | Routes the primary elevator SPI1 to the secondary elevator SPI2 |
| | | 1-3 | Routes the S1D13513 GPIO1 signal to secondary elevator SPI2 CLK |
| | | 2-4 | Routes the primary elevator SPI1 CLK to JP1 (pin 2) for off-board use |
| J13 | SPI MOSI Routing Configuration | 1-2 | Routes the S1D13513 GPIO2 signal to JP1 (pin 2) for off-board use |
| | | 3-4 | Routes the primary elevator SPI1 to the secondary elevator SPI2 |
| | | 1-3 | Routes the S1D13513 GPIO2 signal to secondary elevator SPI2 MOSI |
| | | 2-4 | Routes the primary elevator SPI1 MOSI to JP1 (pin 2) for off-board use |

I VVR-LCDC-EPSON Jumper Settings

Continued

| Jumper | Option | Setting | Description |
|--------|---|---------|---|
| J14 | SPI MISO Routing Configuration | 1-2 | Routes the S1D13513 GPIO3 signal to JP1 (pin 2) for off-board use |
| | | 3-4 | Routes the primary elevator SPI1 to the secondary elevator SPI2 |
| | | 1-3 | Routes the S1D13513 GPIO3 signal to secondary elevator SPI2 MISO |
| | | 2-4 | Routes the primary elevator SPI1 MISO to JP1 (Pin 2) for off-board use |
| J17 | I ² C (SDA) Pass-Thru Selection | 1-2 | Routes the primary elevator I ² C0 to secondary elevator I ² C2 |
| | | 2-3 | Routes the primary elevator I ² C1 to secondary elevator I ² C2 |
| J18 | I ² C (SCL) Pass-Through Selection | 1-2 | Routes the primary elevator I ² C0 to secondary elevator I ² C2 |
| | | 2-3 | Routes the primary elevator I ² C1 to secondary elevator I ² C2 |
| J20 | 10 MHz OSC Disable | 1-2 | Disables the onboard 10 MHz oscillator connected to S1D13513 OSC1 |

I VWR-LCDC-EPSON Switch Settings

| Switch | Option | Setting | Description |
|--------------|--------------------------------------|---------|--|
| SW1 | Reset | Push | Resets the S1D13513 |
| SW2 [1:5] | S1D13513 Host Bus Interface Settings | 1 | Maps to S1D13513 CNF[0:4] (ON = 1 / OFF = 0) Default setting for Tower System is [On,On,On,Off,Off] Corresponding to Parallel Direct 68 bus interface |
| | | 2 | |
| | | 3 | |
| | | 4 | |
| | | 5 | |
| SW2 [6] | S1D13513 Endianness Setting | 6 | Maps to S1D13513 CNF[5] (ON = 1 / OFF = 0) Default setting for Tower System is [Off] Corresponding to Little Endian mode |
| SW2 [7] | S1D13513 Configuration Mode | 7 | Maps to S1D13513 CNF[6] (ON = 1 / OFF = 0) Default setting for Tower System is [On] |



I VVR-LCDC-EPSON Jumper Settings

Continued

| Jumper | Option | Setting | Description |
|--------------|---------------------------|---------|---|
| SW2 [8:9] | S1D13513 PLL Clock Source | 8 | Maps to S1D13513 CNF[7:8] (ON = 1 / OFF = 0) Default setting for Tower System is [Off,On] [Off,Off] = Use CLK13 clock source (refer to J3) [On,Off] = Use BUSCLK (not applicable for direct interfaces) |
| | | 9 | [Off,On] = Use OCSI1 clock source (refer to J20) [On,On] = Use OSCI2 clock source (refer to J2) |
| SW2 [10] | Not Used | 10 | |





Visit freescale.com/TWR-LCDC-EPSON for the latest information on the TWR-LCDC-EPSON Epson display controller module, including:

- Quick start guide
- Schematics

Support

Visit freescale.com/support for a list of phone numbers within your region.

Warranty

Visit freescale.com/warranty for complete warranty information.

For more information, visit freescale.com/Tower

Join the online Tower community at towergeeks.org

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. Tower is a trademark of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © 2013 Freescale Semiconductor, Inc.

Document Number: TWRLCDCEPSONQSG REV 0
Agile Number: 926-78734 REV A

