


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..



RECOMMENDED LAND PATTERN DIMENSION OF PCB

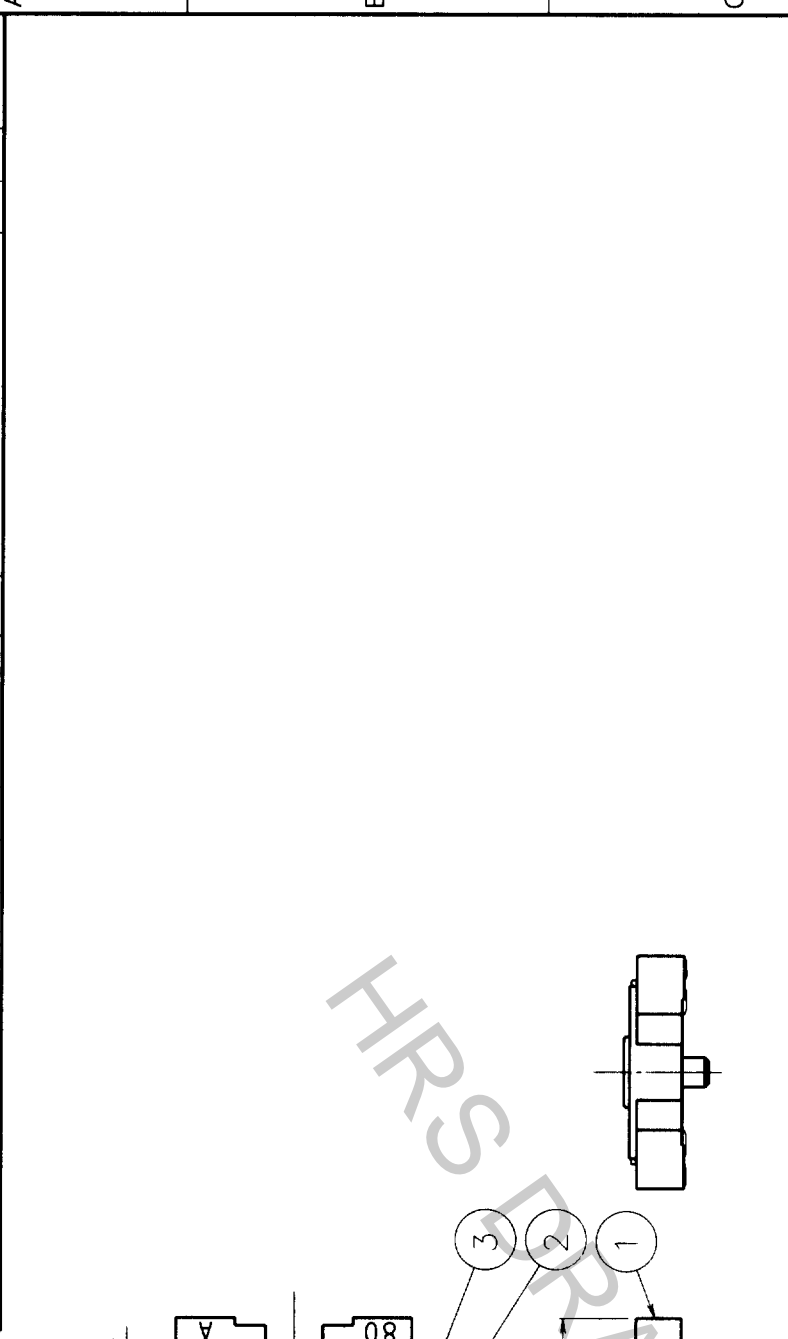

- NOTES 1 SMT LEAD-COPLANARITY: 0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
- 4 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL	

3	PHOSPHOR BRONZE	TIN PLATED
1	UL94V-0	
NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL	

DESIGNED	CHECKED	APPROVED	RELEASED
<i>(Signature)</i>	<i>(Signature)</i>	<i>(Signature)</i>	<i>(Signature)</i>
99.10.25	99.10.25	99.10.26	99.10.26

DRAWING NO.	PART NO.
EDC3-152117-01	FX11LA-92S-SV (21)

SCALE	UNITS	CODE NO.
5 : 1	mm	CL573-0143-9-21

TO	
PCK	

