



UNIT:mm

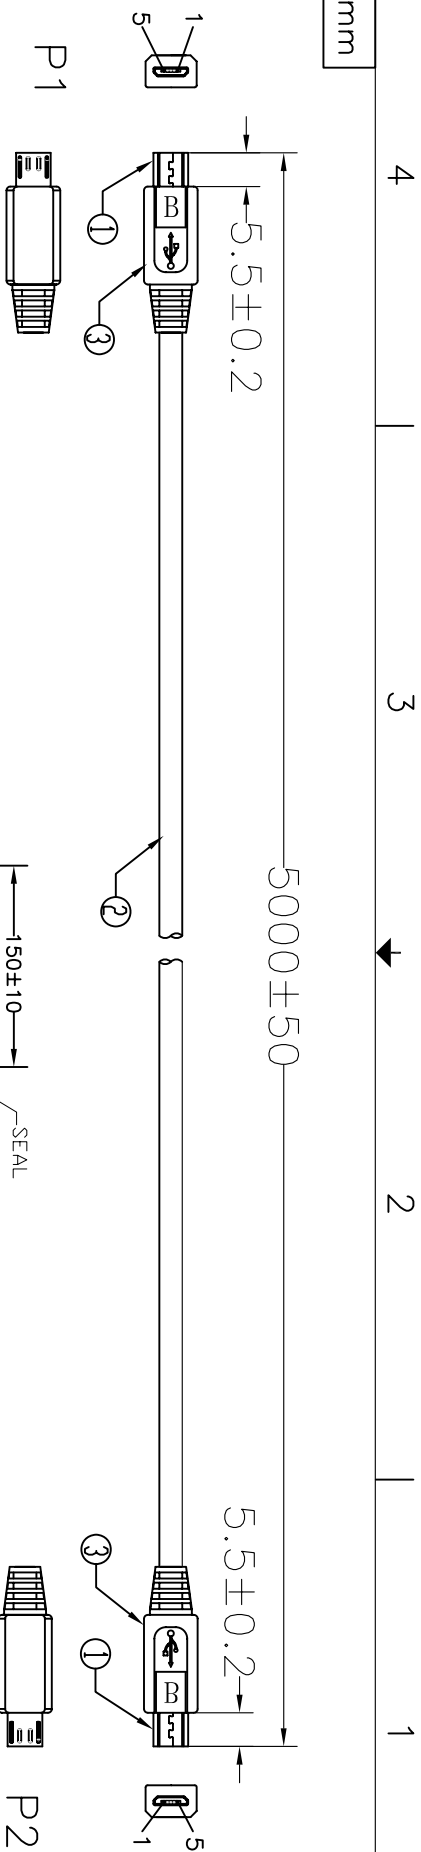

PIN ASSIGNMENT	
P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 DRAIN+BRAID	5
SHELL	SHELL

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 5 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

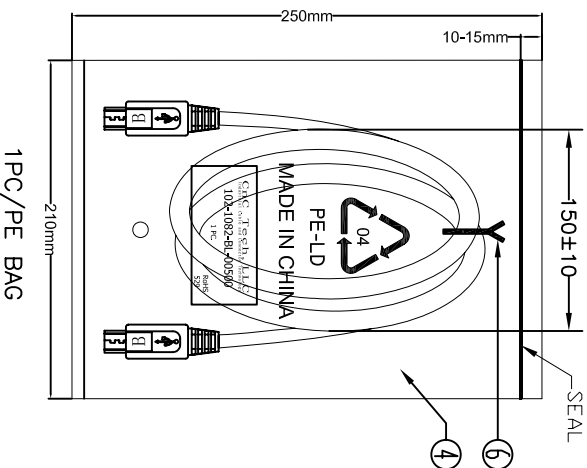

NO.	TIE	Q'TY	NAME	SPECIFICATION
⑥	1	1	BLACK L=120mm	
⑤	1/5		PE BAG	CLEAR SIZE: 330*380*0.05mm PRINT BLACK"MADE IN CHINA"及印生产周期,有透气孔.
④	1		PE BAG	CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"及印生产周期,有透气孔.
③	12g		OUT JACKET	BLACK PVC-40P (MOULD NO:MM-116)
②	1		CABLE	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=5000±15mm
①	2		CONN	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1082-BL-00500
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1