

Active module - UM-D37SUB/M/HC3/16DO/MR/1/SI - 2903733

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



16-channel relay module for Honeywell C300 output modules TDOB01 and TBOB11. On the controller side, the module is controlled on a 37-pos. basis via D-SUB. A screw connection is available (marking: 1...48) on the field side. Module width: 142 mm

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4046356760775

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	142.3 mm
Height	142.3 mm
Depth	65 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Typical input current at U_N	9 mA
Typical response time	5 ms
Typical release time	7 ms
Status display/channel	Yellow LED

Active module - UM-D37SUB/M/HC3/16DO/MR/1/SI - 2903733

Technical data

Output data

Contact type	Single contact, 1-PDT
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V AC/DC
Limiting continuous current	2 A (Ambient temperature of up to 30°C per path)
Min. switching current	10 mA
Interrupting rating (ohmic load) max.	48 W (24 V DC)
	20 W (48 V DC)
	18 W (60 V DC)
	23 W (110 V DC)
	40 W (220 V DC)
	500 VA (250 V AC)

General

No. of channels	16
Mechanical service life	Approx. 2×10^7 cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data for connection 1

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

Connection data for connection 2

Connection name	Field level
Connection method	Screw connection
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of connections	1
Number of positions	50

Supported controller

Corresponding control	HONEYWELL Experion PKS C300/C-Series
Corresponding I/O card	TDOB01 (non-redundant)
	TDOB11 (redundant)

Standards and Regulations

Standards/regulations	DIN EN 50178
-----------------------	--------------

Active module - UM-D37SUB/M/HC3/16DO/MR/1/SI - 2903733

Technical data

Standards and Regulations


Rated insulation voltage	260 V AC
Rated surge voltage	4 kV (basic insulation)
Degree of pollution	2
Overvoltage category	III

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Diagram

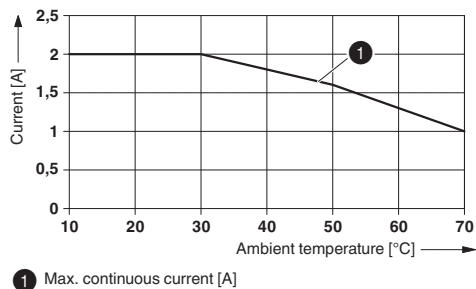

Derating curve: max. continuous current (per path)


Diagram

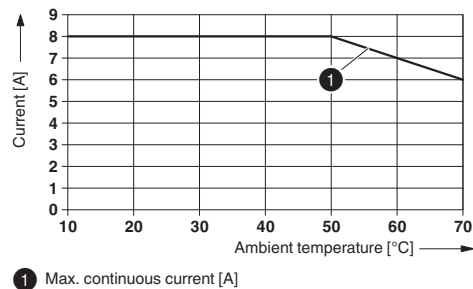

Derating curve: max. continuous current (terminal block supply)

Active module - UM-D37SUB/M/HC3/16DO/MR/1/SI - 2903733

Circuit diagram

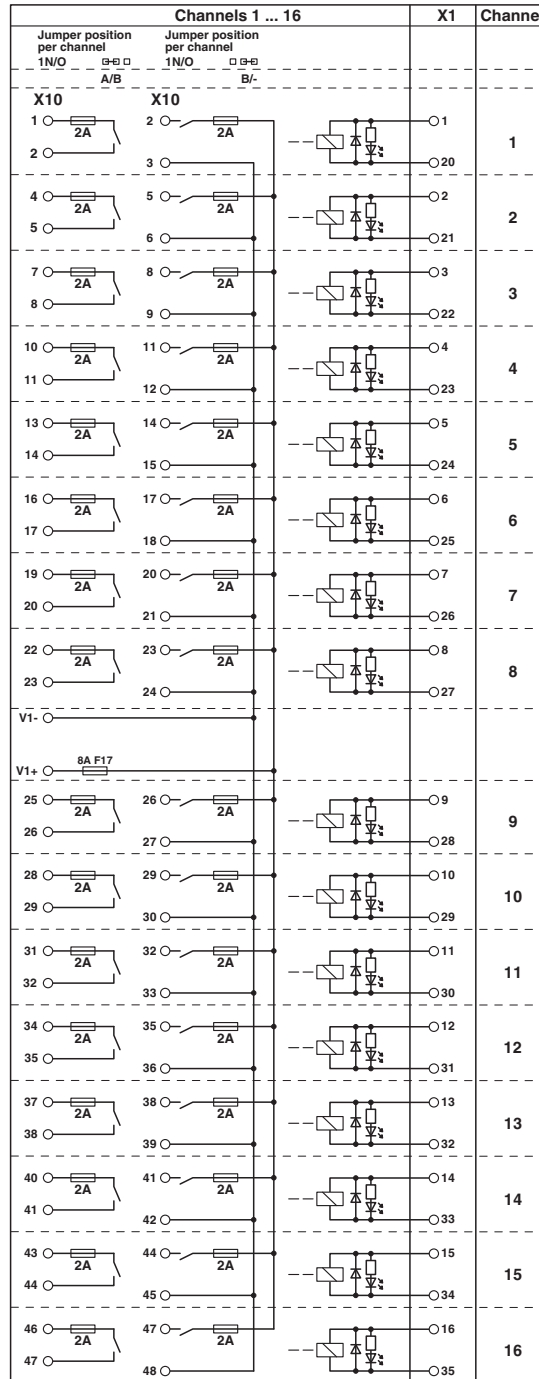

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>