
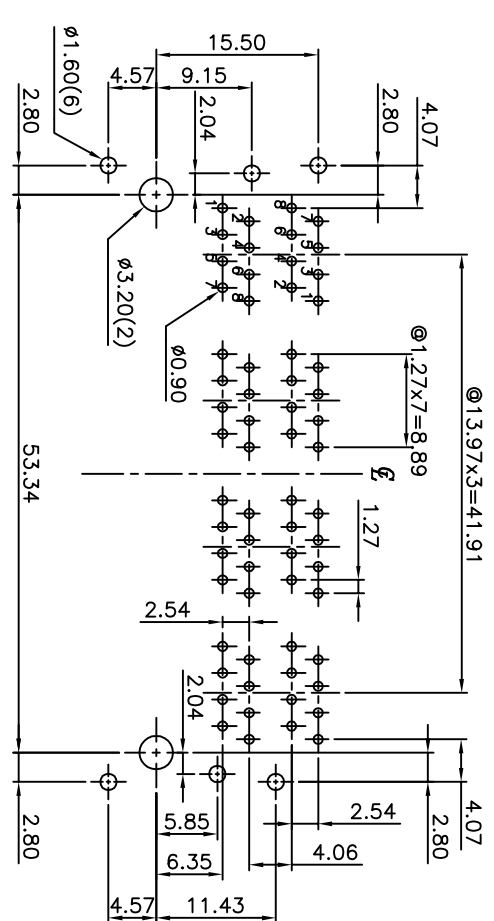
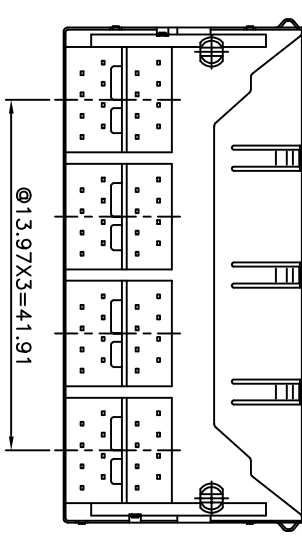
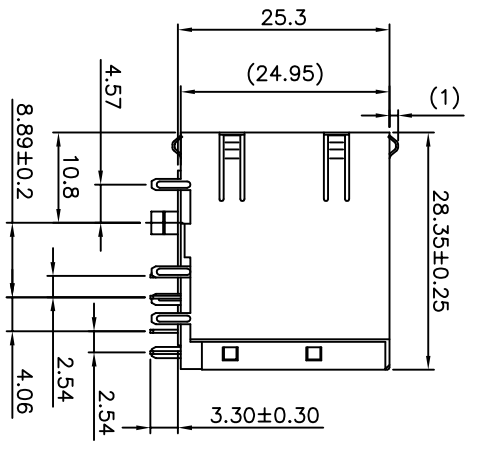


REVISION RECORD	
REV	DESCRIPTION
	DFT

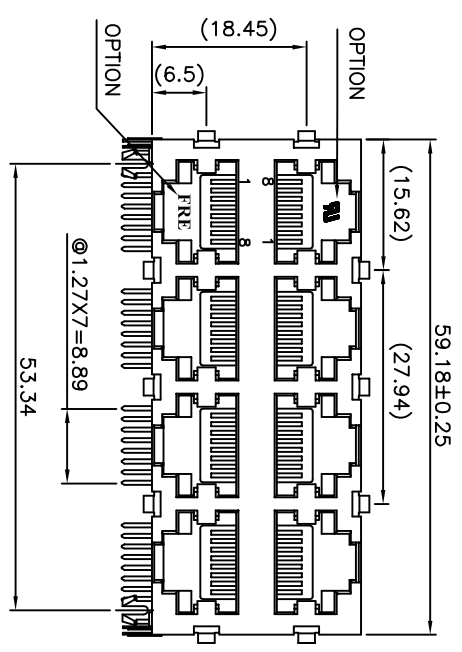

PC BOARD LAYOUT T=1.60mm
COMPONENT SIDE SHOWN
TOLERANCES±0.05mm

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 60 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

- HOUSING & IN'S MATERIAL : PBT FIBER GLASS FILLED . UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE, T=0.35mm.
- SHIELD MATERIAL : COPPER ALLOY, T=0.25mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE TEMPERATURE : -40°C TO +85°C.
 - OPERATION TEMPERATURE: -40°C TO +85°C.
 - WAVE SOLDERING TEMPERATURE: 235°C TO 245°C (3~5 SECONDS).
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

DETACHED LISTS	
MM	INCH
0 ± 0.25	±
.00 ± 0.20	±
.000 ± 0.10	±
ANGLES ± 1°	±
THIRD ANGLE PROJECTION	

RoHS Compliant		Pulse Electronics	
TITLE STACKED GANGED JACK, 2X4		STAMPED PIN III	
DFTO : KURT	DRAWING NO. CE5908-SVC14X-L	SIZE A3	REV 0
DATE : 05/07/2012	/PART NO. E5908-SVC145-L	SHEET 1	OF 1
SCALE : 3:2	DO NOT SCALE DRAWING		

E5908-SVC145-L	NICKEL	BLACK	500*	W/
PART NO.	SHIELD PLATING	COLOR	AU PLATING	FRE & UL LOGO