


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER EC OB60-0061-03	30SEP03	WS	JH

1. DIMENSIONS IN [] ARE IN INCHES
2. MAXIMUM CONNECTOR LOSS IS EQUAL TO 0.50 dB PLUS CABLE ATTENUATION.

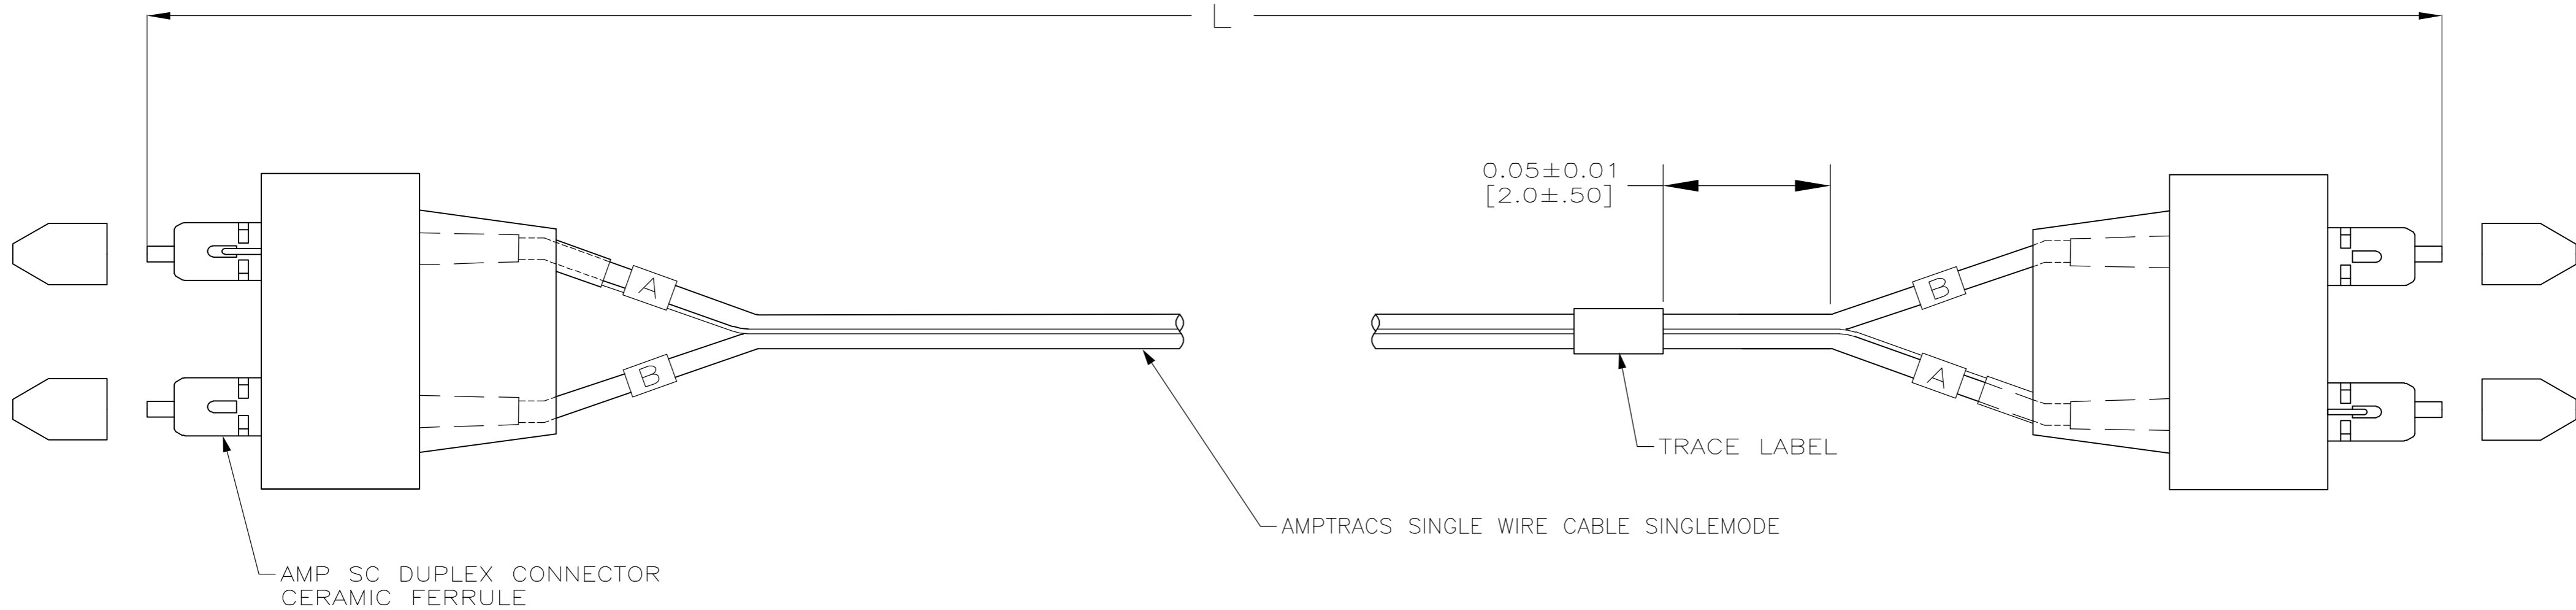

0.52	10.0±0.15 [393.7±6]	1-1435726-0
0.52	7.0±0.08 [275.6±3]	1435726-7
0.51	5.0±0.08 [196.9±3]	1435726-5
-	-	-
0.50	3.0±0.05 [118.1±2.0]	1435726-3
0.50	2.0±0.05 [78.7±2.0]	1435726-2
0.50	1.0±0.05 [39.4±2.0]	1435726-1
CONNECTOR LOSS (dB) \triangle		L PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W SOURBEER 01APR03	AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: METERS ■ [INCHES]		CHK J HOFFER 01APR03		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		APVD J APGAR 01APR03	NAME CABLE ASSEMBLY, FIBER OPTIC, AMPTRACS, SC TO SC, DUPLEX, SINGLEMODE	
MATERIAL -		APPLICATION SPEC -	SIZE A2	CAGE CODE 00779
		WEIGHT -	DRAWING NO C=1435726	
		CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1
			RESTRICTED TO -	REV B