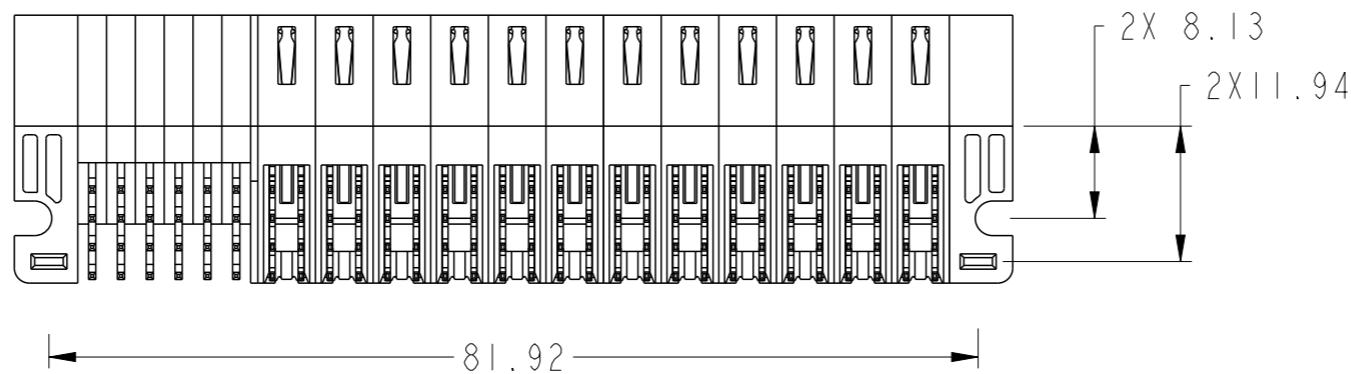
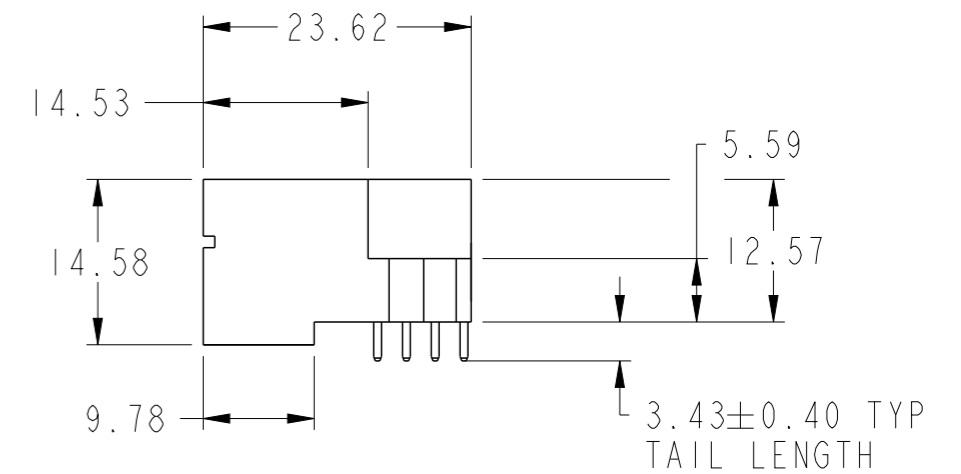
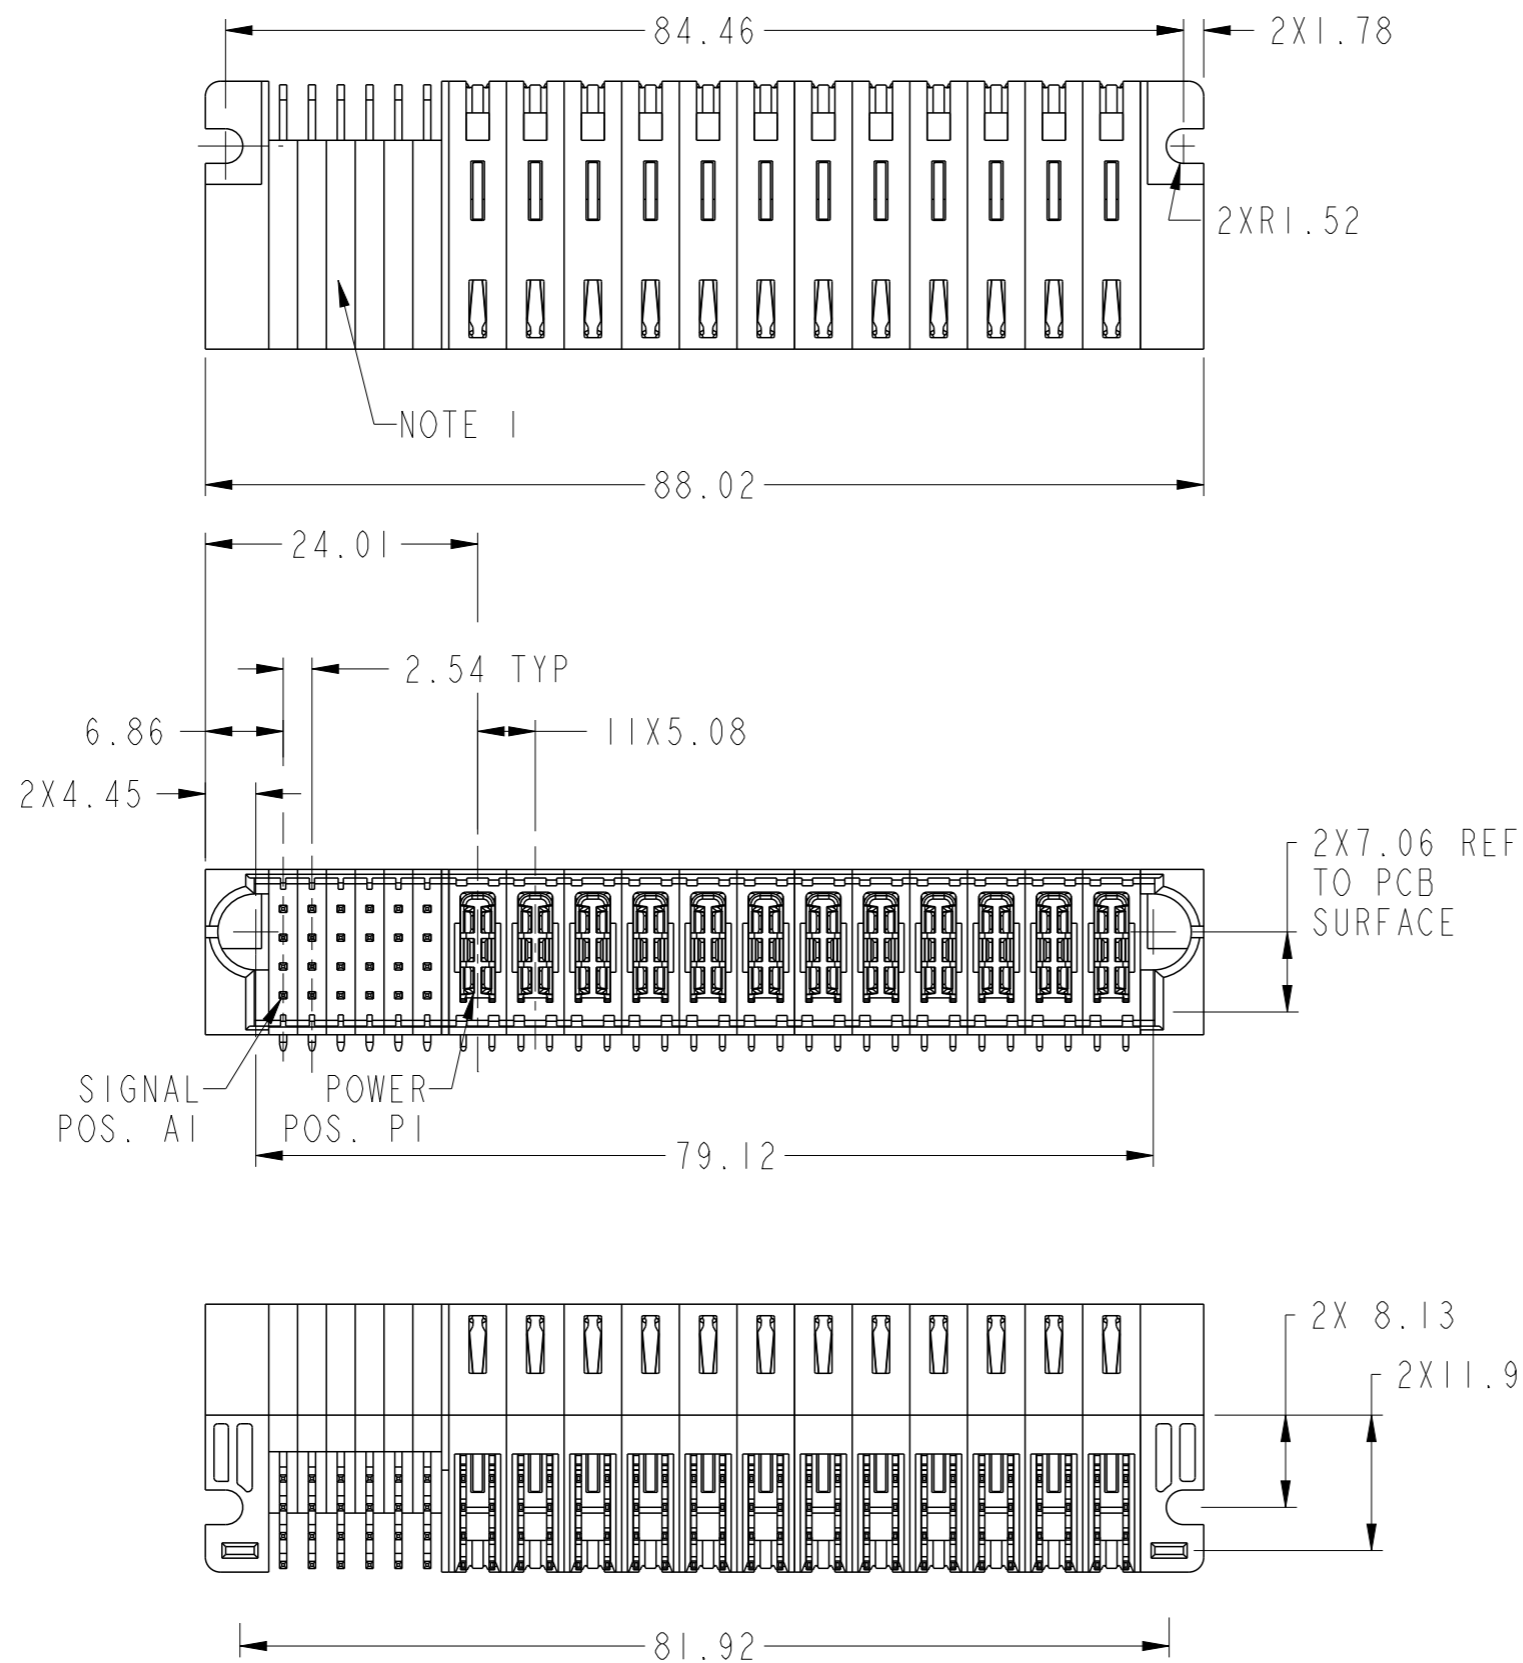
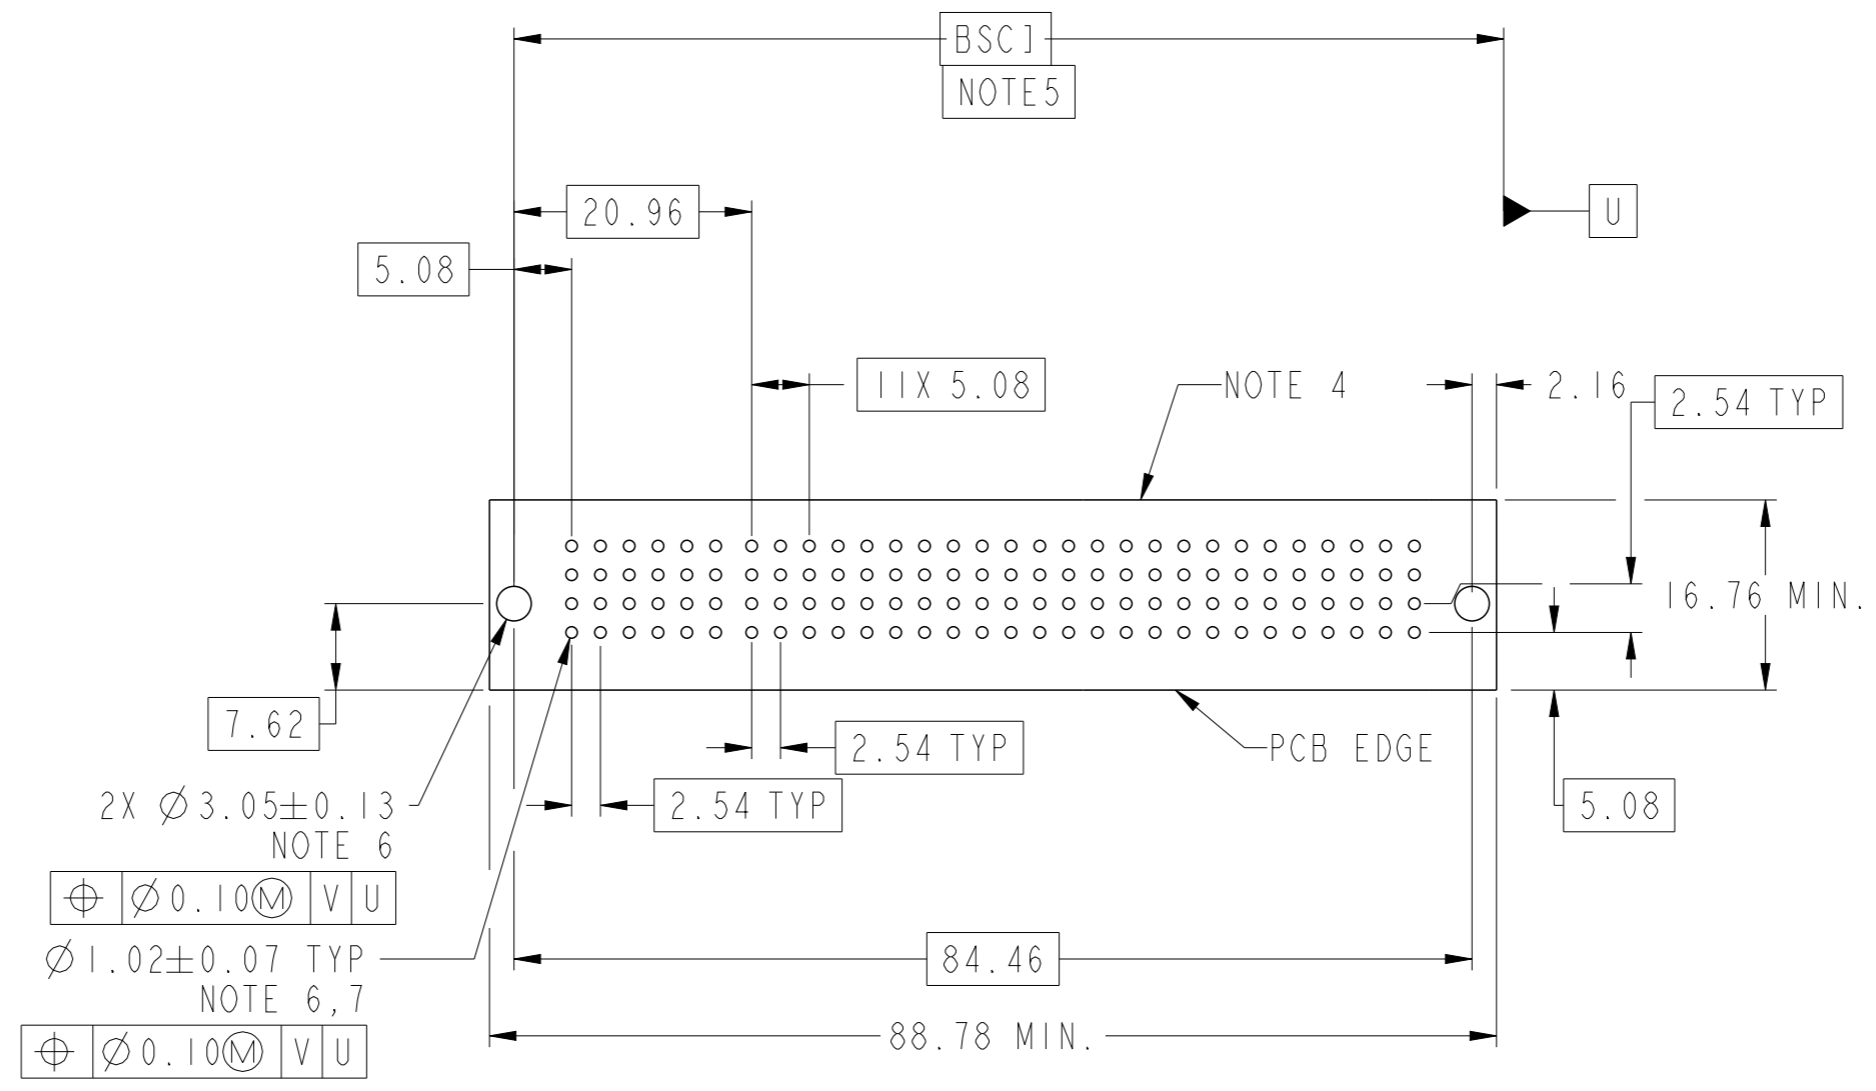


PRODUCT NUMBER SEE SHEET 2



spec ref	*	dr	Xie Bob	2013/10/17	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Xie Bob	2013/11/12			ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Li-He	2013/11/12						
surface	<input checked="" type="checkbox"/> linear <input type="checkbox"/> angular	appr	Pei-Ming Zheng	2013/11/12			24S + 12HP RA STB HEADER	dwg no 10106132-C006002	rev A	
ASME Y14.5	0.X ±0.5 0.XX ±0.25 0.XXX ±0.10	www.fci.com		cat. no.	Product - Customer Drw			sheet 1 of 3		
ASME Y14.5	angular	0° ±2°		PDS: Rev :A		STATUS:Released		Printed: Nov 12, 2013		

PRODUCT NO.	ROWS	SIGNAL						HIGH POWER												E2
		E1	1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	
10106132-C006002LF	DCBA	U	U	U	U	U	U	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1
		S	S	F	S	S	S													
		R	R	R	R	R	R													



CODE	DESCRIPTION
F	MLBF SIGNAL CONTACT, ROW A (3.43)
H1	STD HIGH POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Xie Bob	2013/10/17	projection	MM	size	A3	scale	3:2	
eng	Xie Bob	2013/11/12			ecn no				
chr	Li-He	2013/11/12			-				
appr	Pei-Ming Zheng	2013/11/12	product family	PwrBlade+	rel level				
					title 24S + 12HP RA STB HEADER		dwg no 10106132-C006002		rev A
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3	




Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Xie Bob	2013/10/17	projection 	MM 	size	A3	scale	3:2
eng	Xie Bob	2013/11/12			ecn no	-		
chr	Li-He	2013/11/12			rel level	Released		
appr	Pei-Ming Zheng	2013/11/12	product family	PwrBlade+				
		title 24S + 12HP RA STB HEADER		dwg no 10106132-C006002	rev A			
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			