


Extended length is with 500g of force

P1	COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

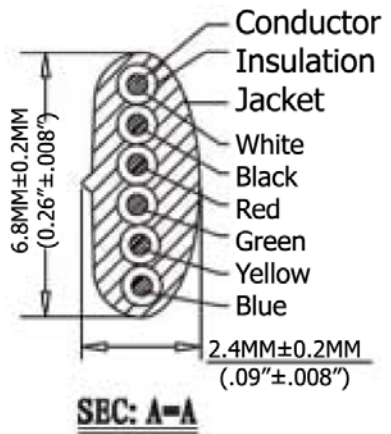

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	134.0 Inches
7,620.0MM-8,763.0MM	3,403.6MM

- Material:**
- Plug Housing: Polycarbonate, clear
 - Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
 - Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
 - Conductor(X4C): 26AWG (0.12X12) Bare Copper
 - Insulation(X4C): PP6331 ID 0.95-1.0
 - Jacke: PVC No UL 80 P
 - Package: Individual PE Bag



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	AT-C-26-6/6/S-25-OE
X.X	±0.40				Approved	Chappell	
X.XX	±0.25						Title NON-UL 26AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Single Plug, 50µ" of contact plating, SILVER
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet
		Modification	Date	Name	ASSMANN W+SW components		