

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



---

© COPYRIGHT - By -

ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	PLATING CHANGE TO PdNi +Au FLASH AT AREA F	14MAY2014	KJK	JK

POS. "n"	L±0.4	PART NO.	
2	4.58	0-829 163-2	
3	7.12	0-829 163-3	
4	9.66	0-829 163-4	
5	12.20	0-829 163-5	
7	17.28	0-829 163-7	
8	19.82	0-829 163-8	
10	24.90	1-829 163-0	OBSOLETE

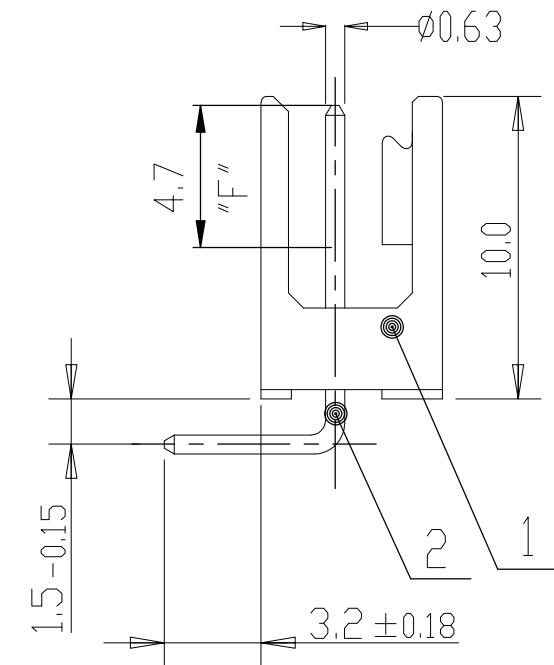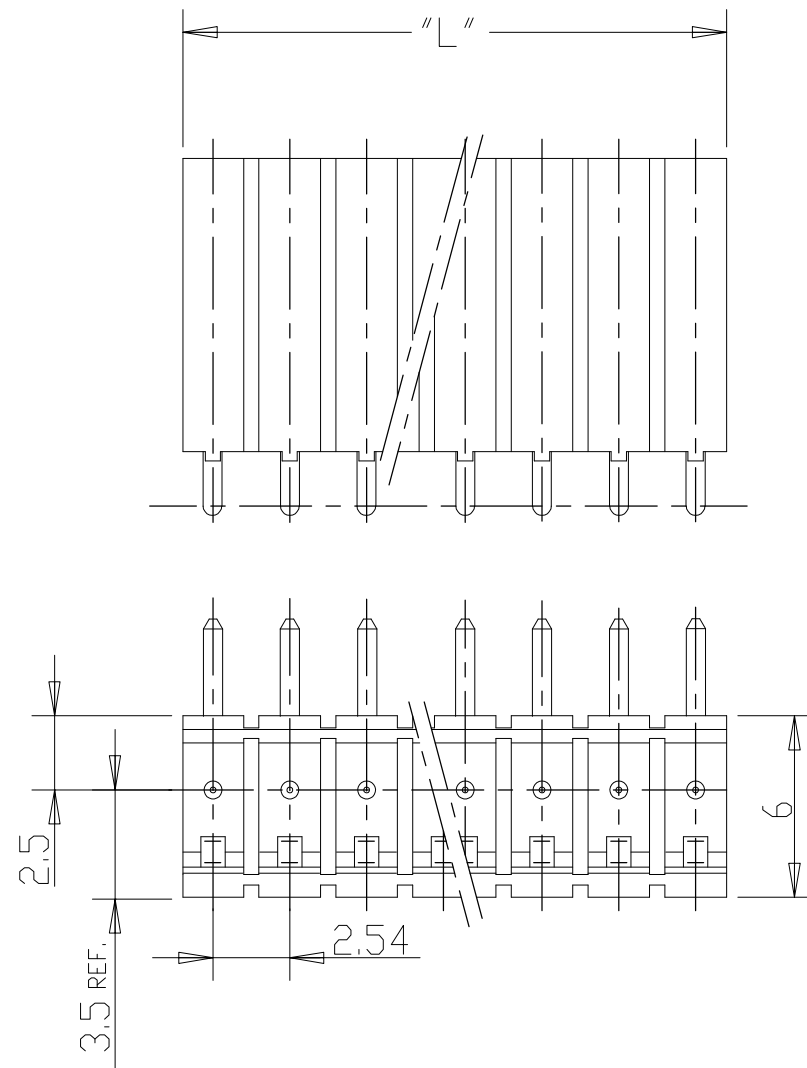

1 MATING SIDE AT CONTACT AREA F  
 MIN. 0.7µm PdNi + 0.1µm GOLD FLASH OVER 1.27µm Ni  
 SOLDER SIDE: MIN. 3.0µm Sn OVER 1.27µm Ni

2	CONTACT PIN	CuZn	1
1	PIN HOUSING	PA 4/6	BLACK
			PLATING COLOR

VERWENDET FÜR	ITEM NO.	DESCRIPTION	MATERIAL	PLATING COLOR
E-87-9401				
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.HO 21.03.88	 TE Connectivity AMPMODU II PIN HEADER 90 DEG, SINGLE ROW	
		CHK SCHAARSCHMIDT 21.03.88		
DIMENSIONS: mm		APVD		
		PRODUCT SPEC 108-18012		
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm		APPLICATION SPEC	NAME	
0 PLC ± -			SIZE	CAGE CODE
1 PLC ± -			DRAWING NO	RESTRICTED TO
2 PLC ± -			A3	00779
3 PLC ± -			G-829163	
4 PLC ± -				
ANGLES ± -		WEIGHT -		
MATERIAL SEE TABLE		CUSTOMER DRAWING		
FINISH SEE TABLE		SCALE 4:1	SHEET 1 OF 1	REV G