
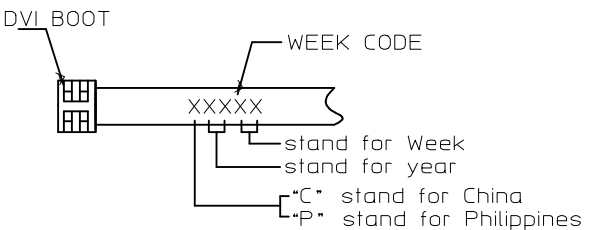



REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
CY14-5154	2013/08/21	G	CHANGE THE LABELING CONTENT FOR PRODUCTS TRANSFER TO PHILIPPINES	AHOU
CY14-5301	2013/09/12	H	CHANGE THE LABELING CONTENT FOR PRODUCTS TRANSFER TO PHILIPPINES	AHOU

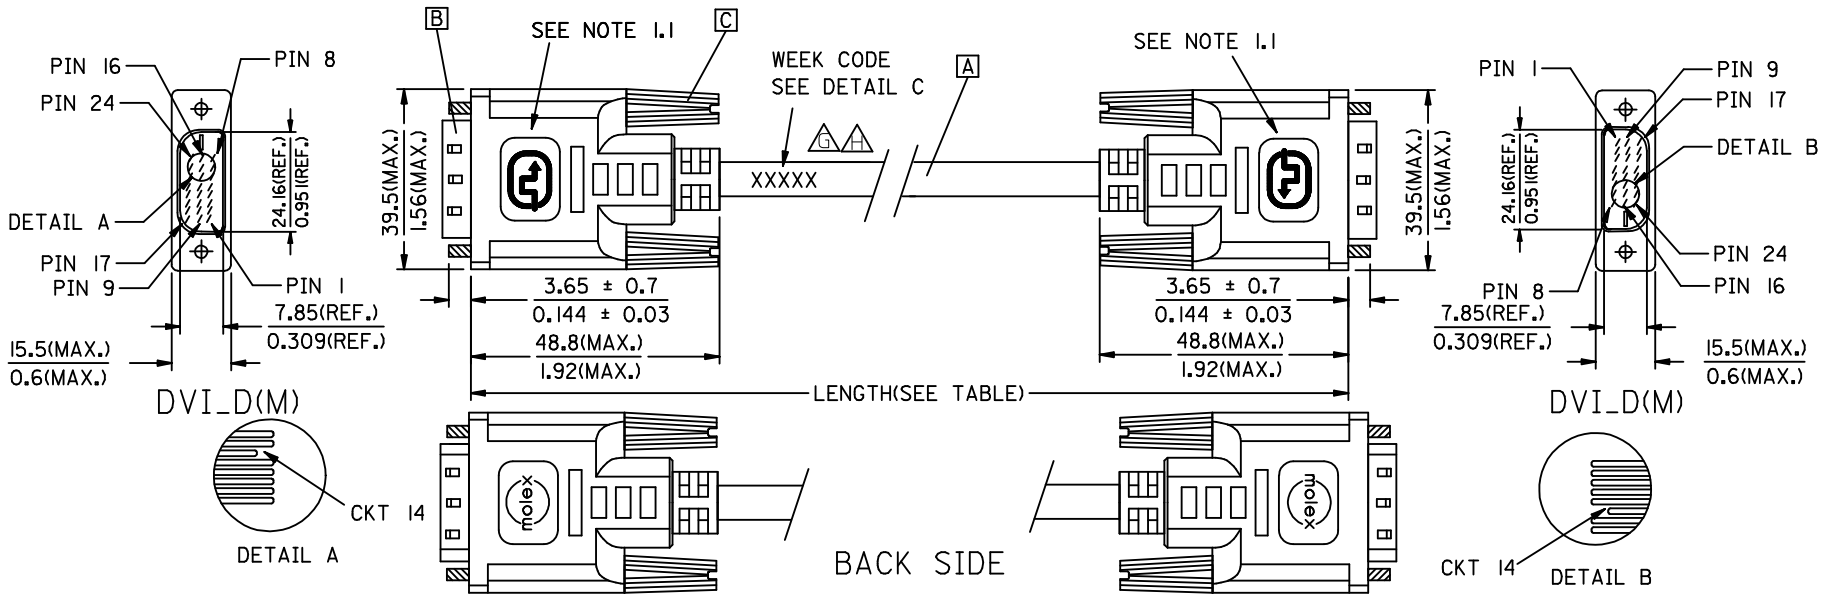

△	88741-8121	DVI_D-DVI_D DUAL LINK CABLE 5M PARCHMENT WHT	5000 ± 150 196.9 ± 5.9	PARCHMENT WHITE	887808369
△	88741-8111	DVI_D-DVI_D DUAL LINK CABLE 3M PARCHMENT WHT	3000 ± 80 118.1 ± 3.1	PARCHMENT WHITE	887808369
△	88741-8101	DVI_D-DVI_D DUAL LINK CABLE 2M PARCHMENT WHT	2000 ± 60 78.7 ± 2.4	PARCHMENT WHITE	887808369
△	88741-8120	DVI_D-DVI_D DUAL LINK CABLE 5M BLK	5000 ± 150 196.9 ± 5.9	BLACK	887808368
△	88741-8110	DVI_D-DVI_D DUAL LINK CABLE 3M BLK	3000 ± 80 118.1 ± 3.1	BLACK	887808368
△	88741-8100	DVI_D-DVI_D DUAL LINK CABLE 2M BLK	2000 ± 60 78.7 ± 2.4	BLACK	887808368
	MX P/N	DESCRIPTION	LENGTH	CABLE COLOR	CABLE P/N

DETAIL C △△△

ENTER DESCRIPTION EC NO: CPG2014-0797 DRAWN: XJGU001 CHK'D: AHOU APPR: XAWANG	QUALITY SYMBOLS △=0 △=0 △=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH	DRAWN BY	DATE	TITLE		
		4 PLACES	± ---	± ---	XJGU001	2013/09/06	DVI_D DUAL LINK CABLE  SD-88741-002	
		3 PLACES	± ---	± ---	CHECKED BY	DATE		
2 PLACES	± ---	± ---	ZXDENG	2013/09/06				
1 PLACE	± ---	± ---	APPROVED BY	DATE				
0 PLACE	± ---	± ---	XAWANG	2013/09/12	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-88741-002	SHEET NO. 1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

8. CONNECTION DIAGRAM

SHIELD	SHIELD	GROUND
PIN 24	PIN 24	TMDS CLOCK-
PIN 23	PIN 23	TMDS CLOCK+
PIN 22	PIN 22	TMDS CLOCK SHIELD
PIN 21	PIN 21	TMDS DATA 5+
PIN 20	PIN 20	TMDS DATA 5-
PIN 19	PIN 19	TMDS DATA 0/5 SHIELD
PIN 18	PIN 18	TMDS DATA 0+
PIN 17	PIN 17	TMDS DATA 0-
PIN 16	PIN 16	HOT PLUG DETECT
PIN 15	PIN 15	GROUND(+5V)
PIN 14	PIN 14	POWER +5V
PIN 13	PIN 13	TMDS DATA 3+
PIN 12	PIN 12	TMDS DATA 3-
PIN 11	PIN 11	TMDS DATA 1/3 SHIELD
PIN 10	PIN 10	TMDS DATA 1+
PIN 9	PIN 9	TMDS DATA 1-
PIN 7	PIN 7	DDC DATA
PIN 6	PIN 6	DDC CLOCK
PIN 5	PIN 5	TMDS DATA 4+
PIN 4	PIN 4	TMDS DATA 4-
PIN 3	PIN 3	TMDS DATA 2 /4 SHIELD
PIN 2	PIN 2	TMDS DATA 2+
PIN 1	PIN 1	TMDS DATA 2-
DVI_D	DVI_D	CABLE FUNCTION

NOTE: 1. OVERMOLD SPECIFICATION

- 1.1 DVI BOOT MOLDED WITH SNOW WHITE PVC RESIN P/N IS 887800076.
- 1.2 UL94V-0, COLOR: MAD432
- 1.3 HARDNESS (DUROMETER): SHORE A 90-95

2. MECHANICAL SPECIFICATION

- 2.1 CABLE SHOULD STAND THE PULL FORCE 89-11IN FOR 30 SECONDS WITH NO VISIBLE TERMINATION DAMAGE.
- 2.2 CABLE SHOULD PASS THE FLEX TEST IN 100 CYCLES AT EACH OF PLANES, PER EIA 364-41, CONDITION 1.

3. CABLE ELECTRICAL SPECIFICATION

- 3.1 DIELECTRIC STRENGTH: 300VDC FOR 10mS.
- 3.2 INSULATION RESISTANCE: 20 MEGA Ohms
- 3.3 DIFFERENTIAL LINES CHARACTERISTIC IMPEDANCE: 100 ± 7 Ohms @TDR.

4. DVI CONNECTOR SPECIFICATION

- 4.1 REFER TO PRODUCT SPEC. PS74320-0001.
- 4.2 CONTACT PLATING: AU FLASH.

5. SHORTCIRCUIT AMONG DRAIN WIRES SIGNAL GROUND IS ACCEPTABLE IN DVI CABLE.

6. THIS PRODUCT MUST MEET MX RoHS COMPLIANCE.

7. MATERIAL LIST

ITEM	DESCRIPTION
C	DVI THUMB SCREW 887806077
B	DVI_D DUAL CHANNEL G/F CONNECTOR 743230003
A	DVI DULA LINK CABLE (SEE TABLE)

ENTER DESCRIPTION EC NO: CPG2014-0797 DRW/N: XJGU001 2013/09/16 CHK/D: AHOU 2013/09/16 APPR: XAWANG 2013/09/24	QUALITY SYMBOLS F _A = 0 F _B = 0 F _C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY	DATE	TITLE DVI_D DUAL LINK CABLE			
		4 PLACES ± --- ± ---				XJGU001	2013/09/06				
		3 PLACES ± --- ± ---				CHECKED BY	DATE				
		2 PLACES ± --- ± ---				ZXDENG	2013/09/06				
1 PLACE ± --- ± ---				APPROVED BY	DATE						
0 PLACE ± --- ± ---				XAWANG	2013/09/12						
ANGULAR ± --- °				MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE TABLE		SD-88741-002		2 OF 2			
				SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

7 6 5 4 3 2 1

NOTE:1. OVERMOLD SPECIFICATION
 1.1 DVI BOOT MOLDED WITH SNOW WHITE PVC RESIN P/N IS 887800076.
 1.2 UL94V-0, COLOR: MAD432
 1.3 HARDNESS (DUROMETER): SHORE A 90-95
 2. MECHANICAL SPECIFICATION
 2.1 CABLE SHOULD STAND THE PULL FORCE 89-111N FOR 30 SECONDS WITH NO VISIBLE TERMINATION DAMAGE.
 2.2 CABLE SHOULD PASS THE FLEX TEST IN 100 CYCLES AT EACH OF PLANES, PER EIA 364-41, CONDITION I.
 3. CABLE ELECTRICAL SPECIFICATION
 3.1 DIELECTRIC STRENGTH: 300VDC FOR 10mS.
 3.2 INSULATION RESISTANCE: 20 MEGA Ohms
 3.3 DIFFERENTIAL LINES CHARACTERISTIC IMPEDANCE: 100 ± 7 Ohms @TDR.
 4. DVI CONNECTOR SPECIFICATION
 4.1 REFER TO PRODUCT SPEC. PS74320-0001.
 4.2 CONTACT PLATING: AU FLASH.
 5. SHORTCIRCUIT AMONG DRAIN WIRES SIGNAL GROUND IS ACCEPTABLE IN DVI CABLE.
 6. THIS PRODUCT MUST MEET MX RoHS COMPLIANCE.

8. CONNECTION DIAGRAM

SHIELD	SHIELD	GROUND
PIN 24	PIN 24	TMDS CLOCK-
PIN 23	PIN 23	TMDS CLOCK+
PIN 22	PIN 22	TMDS CLOCK SHIELD
PIN 21	PIN 21	TMDS DATA 5+
PIN 20	PIN 20	TMDS DATA 5-
PIN 19	PIN 19	TMDS DATA 0/5 SHIELD
PIN 18	PIN 18	TMDS DATA 0+
PIN 17	PIN 17	TMDS DATA 0-
PIN 16	PIN 16	HOT PLUG DETECT
PIN 15	PIN 15	GROUND(+5V)
PIN 14	PIN 14	POWER +5V
PIN 13	PIN 13	TMDS DATA 3+
PIN 12	PIN 12	TMDS DATA 3-
PIN 11	PIN 11	TMDS DATA 1/3 SHIELD
PIN 10	PIN 10	TMDS DATA 1+
PIN 9	PIN 9	TMDS DATA 1-
PIN 7	PIN 7	DDC DATA
PIN 6	PIN 6	DDC CLOCK
PIN 5	PIN 5	TMDS DATA 4+
PIN 4	PIN 4	TMDS DATA 4-
PIN 3	PIN 3	TMDS DATA 2 /4 SHIELD
PIN 2	PIN 2	TMDS DATA 2+
PIN 1	PIN 1	TMDS DATA 2-
DVI_D	DVI_D	CABLE FUNCTION

7. MATERIAL LIST

C	DVI THUMB SCREW 887806077
B	DVI_D DUAL CHANNEL G/F CONNECTOR 743230003
A	DVI DULA LINK CABLE (SEE TABLE)
ITEM	DESCRIPTION

ENTER DESCRIPTION EC NO: DG2006-0186 T1 DRWN: PDAI CHKD: APPR: TKAN 2006/03/09 2006/03/09 2006/03/10	DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION 	
				MM/IN		---	METRIC		
				mm	INCH	DRAWN BY	DATE		TITLE
						CHECKED BY	DATE		
		4 PLACES	± ---	± ---	PDAI	2006/03/07	DVI_D DUAL LINK CABLE		
		3 PLACES	± ---	± ---	ZXDENG	2006/01/11			
		2 PLACES	± ---	± ---					
		1 PLACE	± ---	± ---	BORON	2006/03/07	MOLEX INCORPORATED		
		ANGULAR ± ---°		MATERIAL NO.	DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-88741-002	2 OF 2		
				SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				A 4					

6 5 4 3 2 1