






-1, -2; AS SHOWN

NUMBER 1318095




METRIC

PRINT DIST 単位: 概 DIMENSIONS IN MM. DO NOT SCALE PRINT

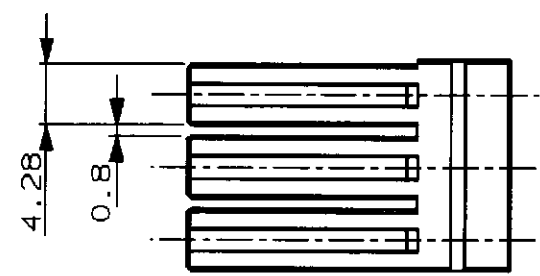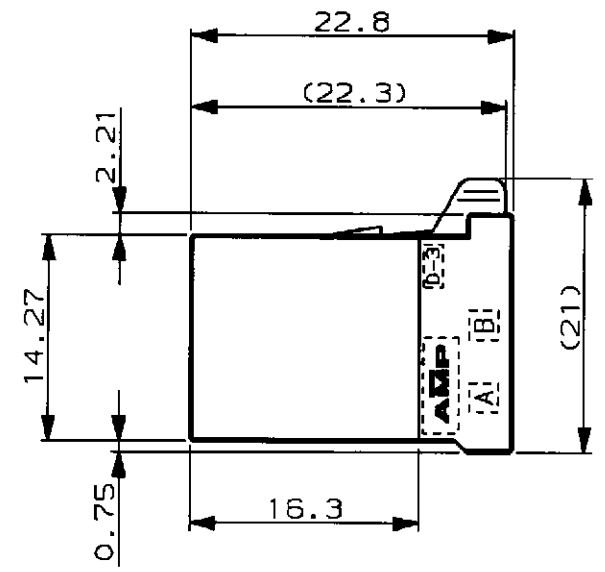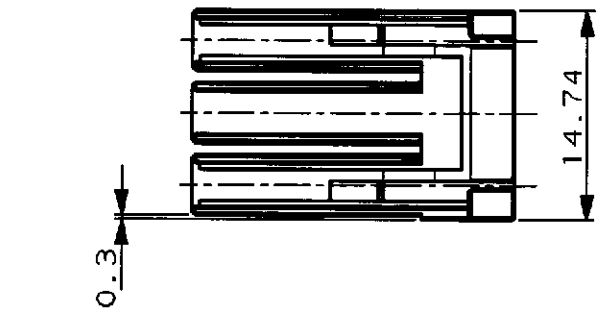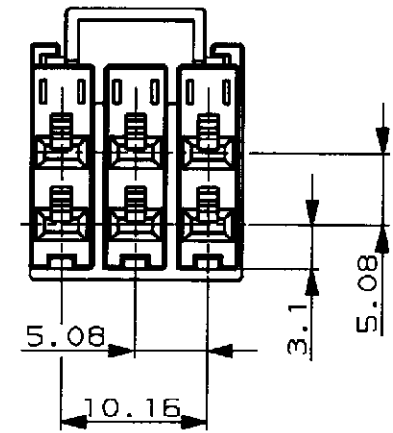

- 注記
- 1 材料: 熱可塑性ポリエステル樹脂
色: 黒
 - 2 使用端子: 175194, 175195 または 175196
使用端子 (バラ): 175216, 175217 または 175218
 - 3 製品規格: 108-5349
 - 4 認定評価報告書: 501-5013

- NOTES
- 1 MATERIAL: GLASS FIELD THERMO PLASTIC, POLYESTER.
COLOR: BLACK
 - 2 CONT. FOR THIS CONN.: 175194, 175195 AND 175196.
CONTACT L/P: 175216, 175217 AND 175218.
 - 3 PRODUCT SPEC: 108-5349
 - 4 QUALIFICATION TEST REPORT: 501-5013

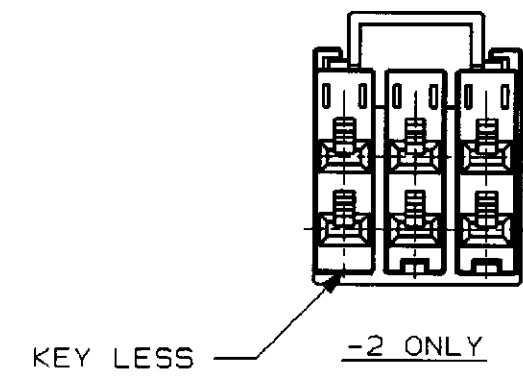

				Copyright ©1998 年 日本エー・エム・ピー株式会社		Copyright ©1998 AMP (Japan) LTD. ALL RIGHTS RESERVED.		AMP 日本エー・エム・ピー株式会社 kawasaki, Japan	
				適合電線断面積 (WIRE RANGE) mm ² (AWG -)		絶縁外径 (INSULATION DIA.) mmφ		名称 (NAME) DYNAMIC (D-3500) REC. HSG. 6POS.	
				材料 (MATERIAL) (SEE NOTE) 注記参照		仕上 (FINISH)		一般公差 (GENERAL TOLERANCE) 10以下: ±0.2 10を超え 30以下: ±0.25 30を超え 100以下: ±0.3 角 度: ±3°	
				DR. 18 SEP 98 M. HIGO		DE. 18 SEP 98 M. HIGO		LOC 番号 (No.) B J 1318095	
LTR 変更 (REVISION RECORD)				DR CHK DATE		CHK. 24 SEP 98 n. matsuoka		APP. 25 SEP 98 J. Hasegawa	
				O RELEASED FJ00-1298-98 MH VM 9/24 '98				尺度 (SCALE) REV. SHEET 2-1 0 1 OF 1	

(CUSTOMER DRAWING) 参 考 面