


PART NUMBER	RATINGS		INTERRUPTING CAPACITY @ 125V 60 HZ
	AMP	VOLTS	
0373012P	12	125	10,000A
0373015P	15	125	10,000A

T/C CHARACTERISTICS (SEE NOTE 2)	
% OF RATING	CLEARING TIME
100%	4 HOURS, MINIMUM
135%	1 HOUR, MAXIMUM
200%	5 SEC. MIN. 60 SEC. MAX.

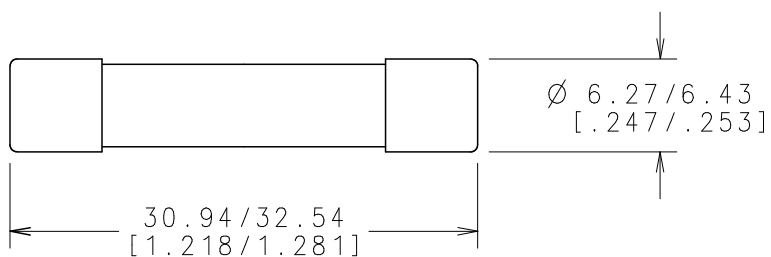

NOTES:

- FUSES ARE LISTED BY UNDERWRITERS' LABORATORIES.
- IN ACCORDANCE WITH UNDERWRITERS' LABORATORIES STANDARD U.L. 248-14.
- PARTS ARE BOTH Pb FREE AND RoHS COMPLIANT.
- LEAD WIRE ARE TIN PLATED.
- FOR RoHS REPORTING DOCUMENTS SEE ES-001156.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

DENOTES CRITICAL CHARACTERISTICS.

() DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN ATTACHED INSTRUCTIONS.

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. DIMENSIONS IN BRACKETS [] ARE INCHES. DIMENSIONS IN BRACKETS [] ARE INCHES. DIMENSIONS IN BRACKETS [] ARE INCHES. DIMENSIONS IN BRACKETS [] ARE INCHES.

UNCONTROLLED DOCUMENT

NO		COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL					
COPIES TO		MATERIAL SPEC		FINISH	
1	9	18	DRW	4/16/08	SCALE 2:1
2	10	19	RP	DATE	SUPER DRW
3	12	20	CHK	DATE	FINISH GOOD WT
4	13	21	APPD	DATE	GRAMS/PIECE
5	14	23			
6	15	33			
7	16	43			
8	17	53			
3RD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED TWO PLACE DEC ±.25[.01] FRACTION ± THREE PLACE DEC ±.100[.004] ANGULAR ±1°		TITLE	
3RD ANGLE PROJECTION		3AG, SLO-BLO FUSES		DRAWG. NO. 0373000P	
3RD ANGLE PROJECTION		LITTELFUSE		REVISION A	
3RD ANGLE PROJECTION		DES PLAINES, ILLINOIS 60016		OUTLINE	
3RD ANGLE PROJECTION		SERIES		0373000P	

LTR	REVISION	CHK	APD
A	000364ER - RELEASED 04/16/08 RP		