

# 15+Gbps 0.5mm pitch Stacking Connectors

FX10 Series Electrical Interface for the OIF 100G Long-Haul DWDM Transmission Module (MSA-100GLH)



## Mechanical Features

- 0.5mm Pitch
- Stacking height : 4 to 8mm (2-piece type)  
8 to 13mm (3-piece type)

## Number of Contacts

With ground plate : 80 / 100 / 120 / 140  
Without ground plate : 96 / 120 / 144 / 168  
3-piece interposer : 120 / 144 / 168

## OIF MSA-100GLH Electrical Interface

FX10A-168P/S-SV(83) assembly is specified for the OIF 100G Long-Haul DWDM Transmission Module host line card - MSA-100GLH electrical connector.



## Suited to High-Density Applications

The 0.5 mm signal contact pitch provides a smaller overall connector, using less mounting area on the board.


## Optional Ground Plate

An alternate style without the ground plate is available. The space provided by the ground plate removal has been filled with additional signal contacts.  
<3-piece type>


- Smooth floating with high speed transmission capability supported by unique 3-piece floating system

- Multiple connectors are allowed on the same PCB (Allowable Mis-alignment Range : ± 0.3mm in XY direction)

## With GND Plate Type

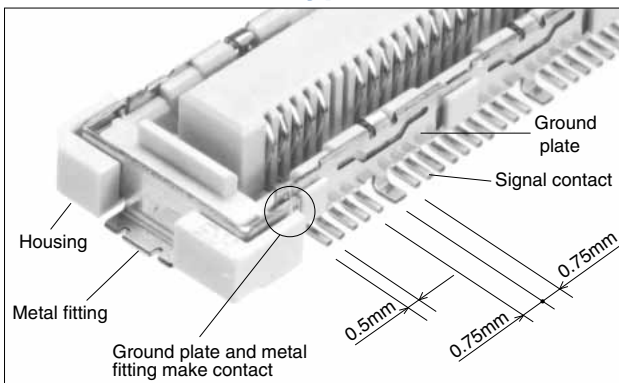

## Floating Interposer

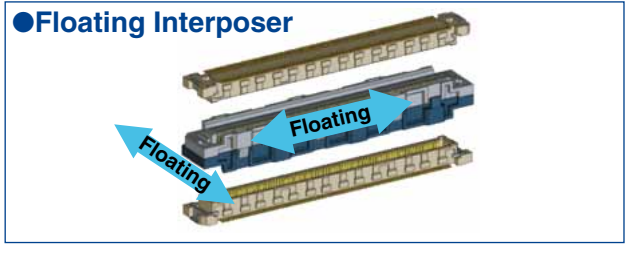



## Signal Integrity Features

### Insertion-Loss-to-Crosstalk-Ratio(ICR)

The insertion-loss-to-crosstalk-ratio (ICR) with five-aggressor differential FEXT meets the extrapolated IEEE 802.3ap specification for 15+Gbps.

### Differential Impedance

85Ω configuration and 100Ω configuration are available.

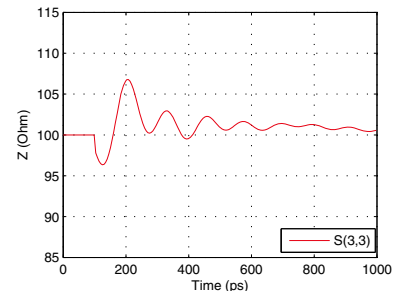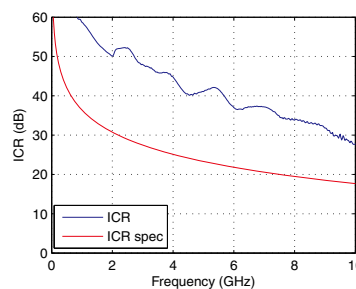

## Stack Height

### 2-piece type

#### With ground plate


| Receptacles   | Headers | FX10#-xP/x-SV | FX10#-xP/x-SV1 |
|---------------|---------|---------------|----------------|
| FX10#-*S/*-SV |         | 4mm           | 5mm            |

#### Without ground plate

| Receptacles | Headers | FX10#-xP-SV | FX10#-xP-SV1 | FX10#-xP-SV2 | FX10#-xP-SV3 | FX10#-xP-SV4 |
|-------------|---------|-------------|--------------|--------------|--------------|--------------|
| FX10#-*S-SV |         | 4mm         | 5mm          | 6mm          | 7mm          | 8mm          |

### 3-piece type

| Stacking Height | Header (Mating side) | Interposer         | Header(Fixed side) |
|-----------------|----------------------|--------------------|--------------------|
| 8mm             | FX10#-xP-SV          | FX10-xIP-xD(Q)-8H  | FX10#-xP-SV        |
| 9mm             | FX10#-xP-SV          |                    | FX10#-xP-SV1       |
| 10mm            | FX10#-xP-SV1         |                    | FX10#-xP-SV1       |
| 11mm            | FX10#-xP-SV2         | FX10-xIP-xD(Q)-8PH | FX10#-xP-SV1       |
| 12mm            | FX10#-xP-SV3         |                    | FX10#-xP-SV1       |
| 13mm            | FX10#-xP-SV4         |                    | FX10#-xP-SV1       |
|                 |                      |                    | FX10#-xP-SV1       |

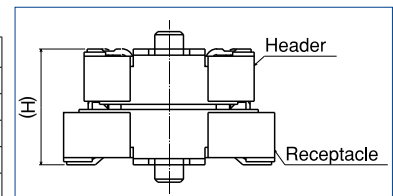

(H) : Reference dimension

## General Product Specifications (2 piece type)

| Rating                          | Rated current   | 0.3 A   | Operating temperature range   | -55 to 85°C (Note 1)                        | Storage temperature range | -10 to +60°C (Note 2) |
|---------------------------------|---|---------|---|---|---------------------------|-----------------------|
|                                 | Rated voltage   | 50 V AC | Operating humidity range  | Relative humidity 95% max (No condensation) | Storage humidity range    | 40 to 70% (Note 2)    |
| Item                            | Requirements  |         | Conditions  |   |                           |                       |
| 1. Insulation resistance        | 100MΩ min   |         | Measured at 100 V DC  |   |                           |                       |
| 2. Voltage resistance           | No flashover or breakdown   |         | 150 V AC applied for 1 minute   |   |                           |                       |
| 3. Contact resistance           | 60mΩ max  |         | Measured at 100 mA  |   |                           |                       |
| 4. Vibration resistance         | No electrical discontinuity for 1μs or greater<br>No damage, cracks, or parts looseness                   |         | Frequency : 10 to 55 Hz, amplitude of 0.75 mm in 3 axis directions, 10 cycles each.   |   |                           |                       |
| 5. Shock resistance             | No electrical discontinuity for 1μs or greater<br>No damage, cracks, or parts looseness                   |         | Acceleration of 490 m/s <sup>2</sup> , 11 ms duration, sine half-wave waveform, for 3 cycles in both directions of each of the 3 axes |   |                           |                       |
| 6. Damp heat (Steady state)     | Contact resistance of 70mΩ max, insulation resistance of 100MΩ min, no damage, cracks, or parts looseness |         | Temperature of 40°C, humidity of 90 to 95%, duration 96 h   |   |                           |                       |
| 7. Temperature cycle            | Contact resistance of 70mΩ max, insulation resistance of 100MΩ min, no damage, cracks, or parts looseness |         | Temperature : -55°C → 15 to 35°C → 85°C → 15 to 35°C<br>Time : 30 min. → 2 to 3 min. → 30 min. → 2 to 3 min. for 5 cycles             |   |                           |                       |
| 8. Mating Cycles                | Contact resistance of 70mΩ max<br>No damage, cracks, or parts looseness                                   |         | 50 times  |   |                           |                       |
| 9. Resistance to soldering heat | No melting of resin portion which affects performance   |         | Reflow : At the recommended temperature profile<br>Soldering iron temperature : 360°C for 5 seconds                                   |   |                           |                       |

Note 1 : Includes temperature rise caused by current flow.

Note 2 : The term storage refers to unused products kept for a long time prior to board mounting. Operating temperature and humidity range are applicable to the non-conducting state after board assembly.

Note 3 : Information contained in this catalog represents general requirements for this series. Contact us for the drawings and specifications for a specific part number shown.


## Materials / Finish

| Part          | Material        | Finish      | Notes  |
|---------------|-----------------|-------------|--|
| Insulator     | LCP             | Beige       | UL94V-0  |
| Contacts      | Phosphor bronze | Header      | Contact Area: Gold plating<br>Lead Area: Tin plating   |
|               |                 | Receptacle  | Contact Area: Gold plating<br>Lead Area: Flash plating |
| Ground plate  | Phosphor bronze | Tin plating | _____  |
| Metal fitting | Phosphor bronze | Tin plating | _____  |

## Product Number Structure

Refer to the chart below when determining the product specifications from the product number.



Please select from the product numbers listed in this catalog when placing orders.

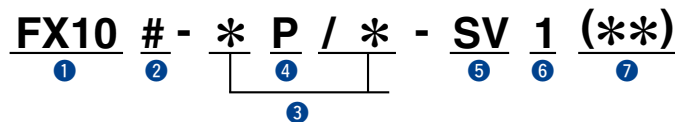

|   |   |
|---|---|
| ① Series name : FX10  | ④ Connector type<br>P : Header<br>S : Receptacle  |
| ② A : With guide post<br>B : Without guide post   |   |
| ③ Number of contacts<br><input type="checkbox"/> With ground plate<br>Signal/Ground : 80/8, 100/10, 120/12, 140/14<br><input type="checkbox"/> Without ground plate<br>Signal : 96, 120, 144, 168 | ⑤ Mounting style<br>SV : Straight SMT   |
|   | ⑥ Product height<br>Blank : Standard<br>1 : Standard + 1mm                                  |
|   | ⑦ Packaging options<br>Blank, (71) : Tray packaging<br>(21), (91) : Embossed tape packaging |

## Headers without ground plate

### 4mm Stacking Height

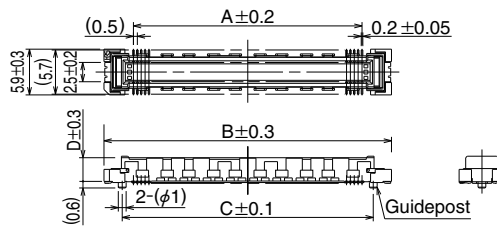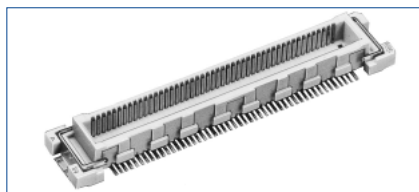

Unit : mm

| Part No.           | HRS No.       | No. of Contacts<br>Signal | A    | B    | C    | D    | E    | F    | Remarks |
|--------------------|---------------|---------------------------|------|------|------|------|------|------|---------|
|                    |               |                           |      |      |      |      |      |      |         |
| FX10A-120P-SV(**)  | 570-0042-2 ** | 120                       | 29.5 | 37.1 | 32.4 | 37.5 | 34.3 |      |         |
| FX10A-144P-SV(**)  | 570-0043-5 ** | 144                       | 35.5 | 43.1 | 38.4 | 43.5 | 40.3 |      |         |
| FX10A-168P-SV(**)  | 570-0044-8 ** | 168                       | 41.5 | 49.1 | 44.4 | 4.5  | 49.5 | 46.3 |         |
| FX10A-96P-SV1(**)  | 570-0141-4 ** | 96                        | 23.5 | 31.1 | 26.4 |      | 31.5 | 28.3 |         |
| FX10A-120P-SV1(**) | 570-0142-7 ** | 120                       | 29.5 | 37.1 | 32.4 |      | 37.5 | 34.3 |         |
| FX10A-144P-SV1(**) | 570-0143-0 ** | 144                       | 35.5 | 43.1 | 38.4 | 5.25 | 43.5 | 40.3 |         |
| FX10A-168P-SV1(**) | 570-0144-2 ** | 168                       | 41.5 | 49.1 | 44.4 |      | 49.5 | 46.3 |         |
| FX10A-120P-SV2(**) | 570-0059-5 ** | 120                       | 29.5 | 37.1 | 32.4 |      | 37.5 | 34.3 |         |
| FX10A-144P-SV2(**) | 570-0056-7 ** | 144                       | 35.5 | 43.1 | 38.4 | 6.25 | 43.5 | 40.3 |         |
| FX10A-168P-SV2(**) | 570-0302-1 ** | 168                       | 41.5 | 49.1 | 44.4 |      | 49.5 | 46.3 |         |
| FX10A-120P-SV3(**) | 570-0060-4 ** | 120                       | 29.5 | 37.1 | 32.4 |      | 37.5 | 34.3 |         |
| FX10A-144P-SV3(**) | 570-0057-0 ** | 144                       | 35.5 | 43.1 | 38.4 | 7.25 | 43.5 | 40.3 |         |
| FX10A-168P-SV3(**) | 570-0304-7 ** | 168                       | 41.5 | 49.1 | 44.4 |      | 49.5 | 46.3 |         |
| FX10A-120P-SV4(**) | 570-0061-7 ** | 120                       | 29.5 | 37.1 | 32.4 |      | 37.5 | 34.3 |         |
| FX10A-144P-SV4(**) | 570-0058-2 ** | 144                       | 35.5 | 43.1 | 38.4 | 7.25 | 43.5 | 40.3 |         |
| FX10A-168P-SV4(**) | 570-0306-2 ** | 168                       | 41.5 | 49.1 | 44.4 |      | 49.5 | 46.3 |         |
| FX10B-96P-SV(**)   | 570-0051-3 ** | 96                        | 23.5 | 31.1 | —    |      | 3.5  | 31.5 | 28.3    |
| FX10B-120P-SV(**)  | 570-0052-6 ** | 120                       | 29.5 | 37.1 | —    | 37.5 |      | 34.3 |         |
| FX10B-144P-SV(**)  | 570-0053-9 ** | 144                       | 35.5 | 43.1 | —    | 43.5 |      | 40.3 |         |
| FX10B-168P-SV(**)  | 570-0054-1 ** | 168                       | 41.5 | 49.1 | —    | 4.5  | 49.5 | 46.3 |         |
| FX10B-96P-SV1(**)  | 570-0151-8 ** | 96                        | 23.5 | 31.1 | —    |      | 31.5 | 28.3 |         |
| FX10B-120P-SV1(**) | 570-0152-0 ** | 120                       | 29.5 | 37.1 | —    |      | 37.5 | 34.3 |         |
| FX10B-144P-SV1(**) | 570-0153-3 ** | 144                       | 35.5 | 43.1 | —    | 6.25 | 43.5 | 40.3 |         |
| FX10B-168P-SV1(**) | 570-0154-6 ** | 168                       | 41.5 | 49.1 | —    |      | 49.5 | 46.3 |         |
| FX10B-168P-SV2(**) | 570-0303-4 ** | 168                       | 41.5 | 49.1 | —    |      | 49.5 | 46.3 |         |
| FX10B-168P-SV3(**) | 570-0305-0 ** | 168                       | 41.5 | 49.1 | —    | 7.25 | 49.5 | 46.3 |         |
| FX10B-144P-SV4(**) | 570-0063-0 ** | 144                       | 35.5 | 43.1 | —    |      | 43.5 | 40.3 |         |
| FX10B-168P-SV4(**) | 570-0307-5 ** | 168                       | 41.5 | 49.1 | —    |      | 49.5 | 46.3 |         |

[Specifications number]-\*\*, (\*\*)  
 (71) : Tray packaging / AuP 0.1μm  
 (83) : Embossed tape packaging 1RL : 1000pcs / AuP 0.76μm  
 (85) : Embossed tape packaging 1RL : 250pcs / AuP 0.76μm  
 (91) : Embossed tape packaging 1RL : 1000pcs / AuP 0.1μm  
 (93) : Tray packaging / AuP 0.76μm


Note 1: There is no polarity with respect to board mounting for this product.

Note 2: The coplanarity of this product's SMT leads is 0.1mm or less.

Note 3: Please order embossed tape packaged items by the reel.


## Recommended PCB Layout Dimensions (Metal mask)

Recommended metal mask thickness : 0.15mm

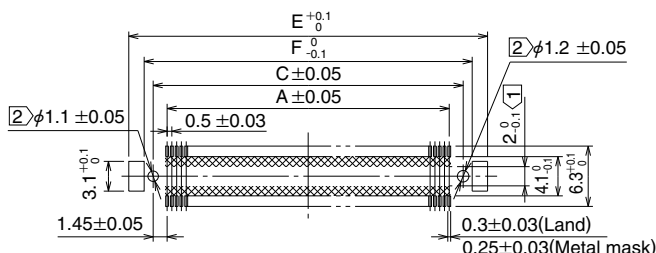

Note ① The cross-hatched area inside the SMT land may come into contact with the connector contacts and thus care should be taken that the pattern does not extend beyond the SMT land width.  
 Note ② Not required in products without guideposts.


## Board-to-Board Distance



|                       | FX10A(B)-168S-SV(83) |           |
|-----------------------|----------------------|-----------|
|                       | ① > (A)              | ② > B     |
| FX10A(B)-168P-SV(83)  | 4                    | 4.3±0.127 |
| FX10A(B)-168P-SV1(83) | 5                    | 5.3±0.127 |
| FX10A(B)-168P-SV2(83) | 6                    | 6.0±0.127 |
| FX10A(B)-168P-SV3(83) | 7                    | 7.0±0.127 |
| FX10A(B)-168P-SV4(83) | 8                    | 8.0±0.127 |

Note ① Stacking height from lead to lead (reference dimensions)  
 Note ② Board-to-board distance  
 Note ③ Stencil (metal mask) shall be based on Hirose's recommended aperture and thickness.

## ■ Receptacles without ground plate

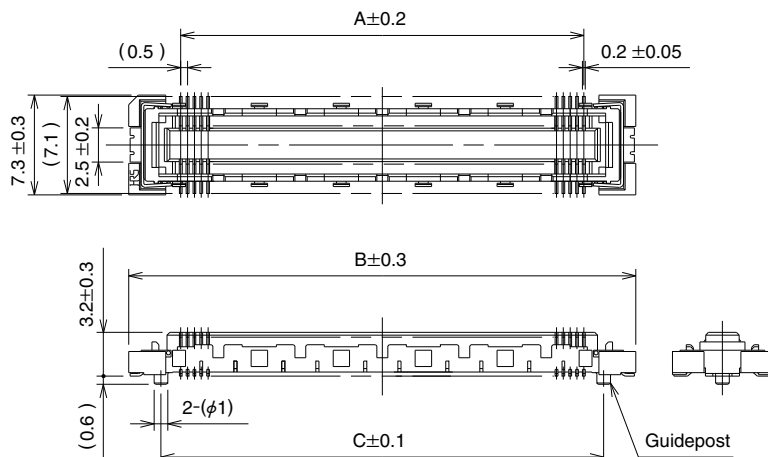

Unit : mm

| Part No.          | HRS No.       | No. of Contacts | A    | B    | C    | D    | E    | Remarks            |
|-------------------|---------------|-----------------|------|------|------|------|------|--------------------|
|                   |               | Signal          |      |      |      |      |      |                    |
| FX10A-96S-SV(**)  | 570-0241-9 ** | 96              | 23.5 | 31.1 | 26.4 | 31.5 | 28.3 | With guideposts    |
| FX10A-120S-SV(**) | 570-0242-1 ** | 120             | 29.5 | 37.1 | 32.4 | 37.5 | 34.3 |                    |
| FX10A-144S-SV(**) | 570-0243-4 ** | 144             | 35.5 | 43.1 | 38.4 | 43.5 | 40.3 |                    |
| FX10A-168S-SV(**) | 570-0244-7 ** | 168             | 41.5 | 49.1 | 44.4 | 49.5 | 46.3 |                    |
| FX10B-96S-SV(**)  | 570-0251-2 ** | 96              | 23.5 | 31.1 | 26.4 | 31.5 | 28.3 | Without guideposts |
| FX10B-120S-SV(**) | 570-0252-5 ** | 120             | 29.5 | 37.1 | 32.4 | 37.5 | 34.3 |                    |
| FX10B-144S-SV(**) | 570-0253-8 ** | 144             | 35.5 | 43.1 | 38.4 | 43.5 | 40.3 |                    |
| FX10B-168S-SV(**) | 570-0254-0 ** | 168             | 41.5 | 49.1 | 44.4 | 49.5 | 46.3 |                    |

[Specifications number] - \*\*, (\*\*)

Blank: Tray packaging / AuP 0.1μm

(21) : Embossed tape packaging 1RL : 1000pcs / AuP 0.1μm

(83) : Embossed tape packaging 1RL : 1000pcs / AuP 0.76μm

(84) : Embossed tape packaging 1RL : 500pcs / AuP 0.76μm

(85) : Embossed tape packaging 1RL : 250pcs / AuP 0.76μm

(93) : Tray packaging / AuP 0.76μm

Note 1 : There is no polarity with respect to board mounting for this product.


Note 2 : The coplanarity of this product's SMT leads is 0.1mm or less.

Note 3 : Please order embossed tape packaged items by the reel.

Note 4 : Using multiple connectors between two boards is not recommended.

## ◆ Recommended PCB Layout Dimensions (Metal mask)


Recommended metal mask thickness : 0.15mm

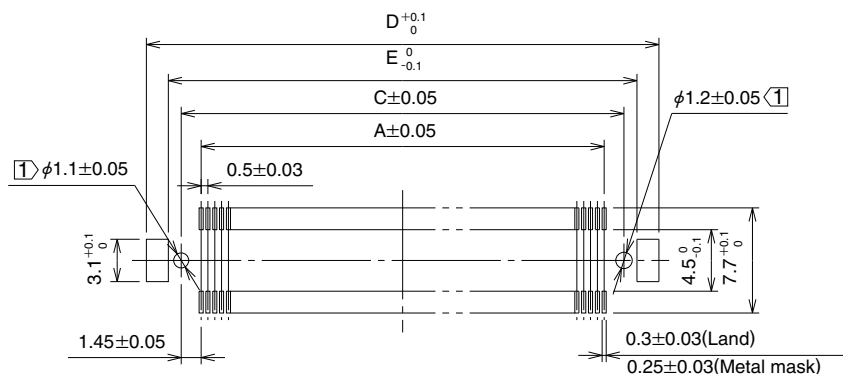

Note 1) Not required in products without guideposts.

## ■ Headers with ground plate

### ● 4mm Stacking Height

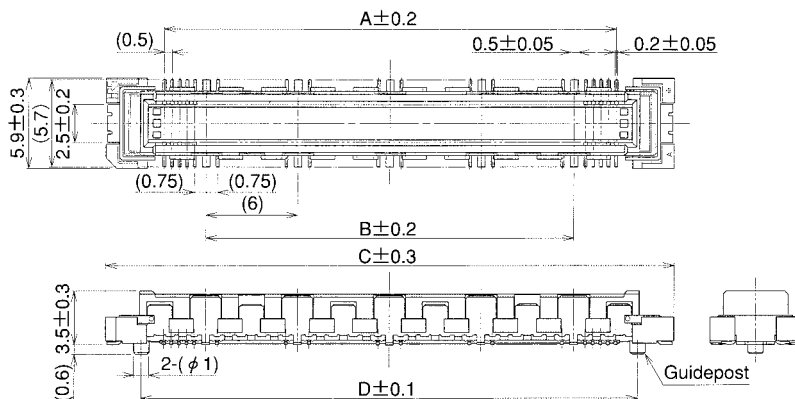

Unit : mm

| Part No.             | HRS No.       | No. of Contacts |        | A    | B  | C    | D    | E    | F    | Remarks         |
|----------------------|---------------|-----------------|--------|------|----|------|------|------|------|-----------------|
|                      |               | Signal          | Ground |      |    |      |      |      |      |                 |
| FX10A-80P/8-SV(**)   | 570-0001-5 ** | 80              | 8      | 23.5 | 18 | 31.1 | 26.4 | 31.5 | 28.3 | With guideposts |
| FX10A-100P/10-SV(**) | 570-0002-8 ** | 100             | 10     | 29.5 | 24 | 37.1 | 32.4 | 37.5 | 34.3 |                 |
| FX10A-120P/12-SV(**) | 570-0003-0 ** | 120             | 12     | 35.5 | 30 | 43.1 | 38.4 | 43.5 | 40.3 |                 |
| FX10A-140P/14-SV(**) | 570-0004-3 ** | 140             | 14     | 41.5 | 36 | 49.1 | 44.4 | 49.5 | 46.3 |                 |
| FX10B-80P/8-SV(**)   | 570-0021-2 ** | 80              | 8      | 23.5 | 18 | 31.1 | —    | 31.5 | 28.3 |                 |
| FX10B-100P/10-SV(**) | 570-0022-5 ** | 100             | 10     | 29.5 | 24 | 37.1 | —    | 37.5 | 34.3 |                 |
| FX10B-120P/12-SV(**) | 570-0023-8 ** | 120             | 12     | 35.5 | 30 | 43.1 | —    | 43.5 | 40.3 |                 |
| FX10B-140P/14-SV(**) | 570-0024-0 ** | 140             | 14     | 41.5 | 36 | 49.1 | —    | 49.5 | 46.3 |                 |

[Specifications number] - \*\*, (\*\*)  
 (71) : Tray packaging  
 (91) : Embossed tape packaging

- Note 1 : There is no polarity with respect to board mounting for this product.
- Note 2 : The coplanarity of this product's SMT leads is 0.1mm or less.
- Note 3 : Please order embossed tape packaged items by the reel. (One reel holds 1,000 pieces.)
- Note 4 : Using multiple connectors between identical boards is not recommended.

## ◆ Recommended PCB Layout Dimensions (Metal mask)


Recommended metal mask thickness : 0.15mm



- Note 1) Cross-hatched portions, totaling n places, indicate the ground circuits.
- Note 2) Cross-hatched portions, 2 places on both sides, indicate the metal fittings.
- Note 3) The cross-hatched area inside the SMT land may come into contact with the connector contacts and thus care should be taken that the pattern does not extend beyond the SMT land width.
- Note 4) Not required in products without guideposts.

## ■ Headers with ground plate

### ● 5mm Stacking Height

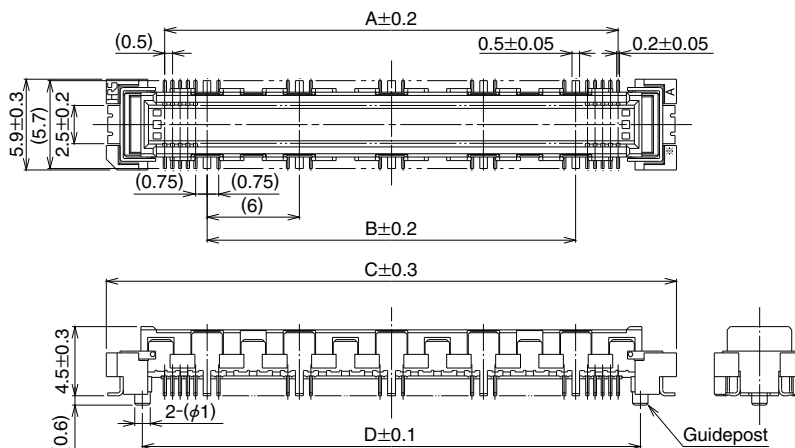

Unit : mm


| Part No.              | HRS No.       | No. of Contacts |        | A    | B  | C    | D    | E    | F    | Remarks            |
|-----------------------|---------------|-----------------|--------|------|----|------|------|------|------|--------------------|
|                       |               | Signal          | Ground |      |    |      |      |      |      |                    |
| FX10A-80P/8-SV1(**)   | 570-0101-0 ** | 80              | 8      | 23.5 | 18 | 31.1 | 26.4 | 31.5 | 28.3 | With guideposts    |
| FX10A-100P/10-SV1(**) | 570-0102-2 ** | 100             | 10     | 29.5 | 24 | 37.1 | 32.4 | 37.5 | 34.3 |                    |
| FX10A-120P/12-SV1(**) | 570-0103-5 ** | 120             | 12     | 35.5 | 30 | 43.1 | 38.4 | 43.5 | 40.3 |                    |
| FX10A-140P/14-SV1(**) | 570-0104-8 ** | 140             | 14     | 41.5 | 36 | 49.1 | 44.4 | 49.5 | 46.3 |                    |
| FX10B-80P/8-SV1(**)   | 570-0121-7 ** | 80              | 8      | 23.5 | 18 | 31.1 | —    | 31.5 | 28.3 | Without guideposts |
| FX10B-100P/10-SV1(**) | 570-0122-0 ** | 100             | 10     | 29.5 | 24 | 37.1 | —    | 37.5 | 34.3 |                    |
| FX10B-120P/12-SV1(**) | 570-0123-2 ** | 120             | 12     | 35.5 | 30 | 43.1 | —    | 43.5 | 40.3 |                    |
| FX10B-140P/14-SV1(**) | 570-0124-5 ** | 140             | 14     | 41.5 | 36 | 49.1 | —    | 49.5 | 46.3 |                    |

[Specifications number] - \*\*, (\*\*)  
 (71) : Tray packaging  
 (91) : Embossed tape packaging

- Note 1 : There is no polarity with respect to board mounting for this product.
- Note 2 : The coplanarity of this product's SMT leads is 0.1mm or less.
- Note 3 : Please order embossed tape packaged items by the reel. (One reel holds 1,000 pieces.)
- Note 4 : Using multiple connectors between identical boards is not recommended.


## ◆ Recommended PCB Layout Dimensions (Metal mask)

Recommended metal mask thickness : 0.15mm

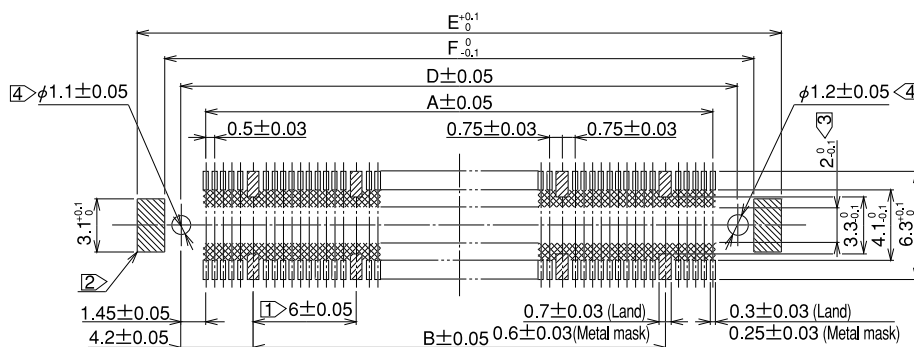

- Note ① Cross-hatched portions, totaling n places, indicate the ground circuits.
- Note ② Cross-hatched portions, 2 places on both sides, indicate the metal fittings.
- Note ③ The cross-hatched area inside the SMT land may come into contact with the connector contacts and thus care should be taken that the pattern does not extend beyond the SMT land width.
- Note ④ Not required in products without guideposts.

## ■ Receptacles with ground plate

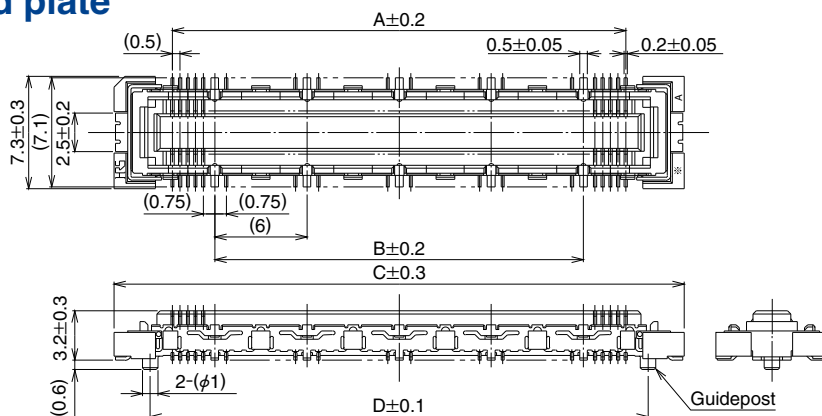

Unit : mm


| Part No.             | HRS No.       | No. of Contacts |        | A    | B  | C    | D    | E    | F    | Remarks            |
|----------------------|---------------|-----------------|--------|------|----|------|------|------|------|--------------------|
|                      |               | Signal          | Ground |      |    |      |      |      |      |                    |
| FX10A-80S/8-SV(**)   | 570-0201-4 ** | 80              | 8      | 23.5 | 18 | 31.1 | 26.4 | 31.5 | 28.3 | With guideposts    |
| FX10A-100S/10-SV(**) | 570-0202-7 ** | 100             | 10     | 29.5 | 24 | 37.1 | 32.4 | 37.5 | 34.3 |                    |
| FX10A-120S/12-SV(**) | 570-0203-0 ** | 120             | 12     | 35.5 | 30 | 43.1 | 38.4 | 43.5 | 40.3 |                    |
| FX10A-140S/14-SV(**) | 570-0204-2 ** | 140             | 14     | 41.5 | 36 | 49.1 | 44.4 | 49.5 | 46.3 |                    |
| FX10B-80S/8-SV(**)   | 570-0221-1 ** | 80              | 8      | 23.5 | 18 | 31.1 | —    | 31.5 | 28.3 | Without guideposts |
| FX10B-100S/10-SV(**) | 570-0222-4 ** | 100             | 10     | 29.5 | 24 | 37.1 | —    | 37.5 | 34.3 |                    |
| FX10B-120S/12-SV(**) | 570-0223-7 ** | 120             | 12     | 35.5 | 30 | 43.1 | —    | 43.5 | 40.3 |                    |
| FX10B-140S/14-SV(**) | 570-0224-0 ** | 140             | 14     | 41.5 | 36 | 49.1 | —    | 49.5 | 46.3 |                    |

[Specifications number] - \*\*, (\*\*)  
 (71) : Tray packaging  
 (91) : Embossed tape packaging

Note 1 : There is no polarity with respect to board mounting for this product.  
 Note 2 : The coplanarity of this product's SMT leads is 0.1mm or less.  
 Note 3 : Please order embossed tape packaged items by the reel. (One reel holds 1,000 pieces.)

## ◆ Recommended PCB Layout Dimensions (Metal mask)

Recommended metal mask thickness : 0.15mm

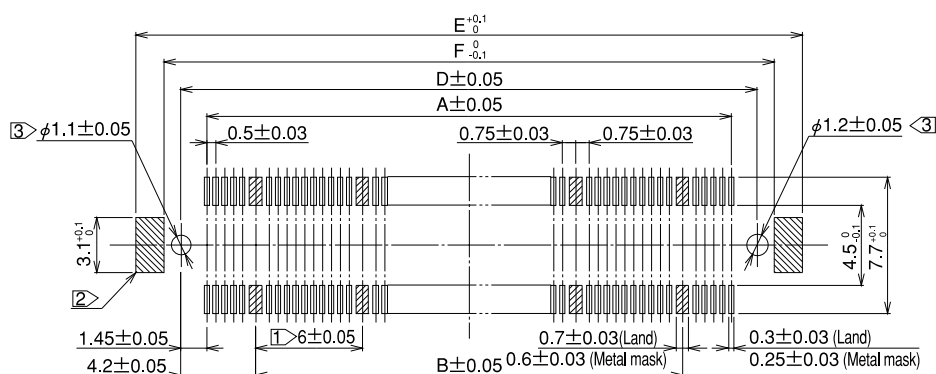

Note ① Cross-hatched portions, totaling n places, indicate the ground circuits.  
 Note ② Cross-hatched portions, 2 places on both sides, indicate the metal fittings.  
 Note ③ Not required in products without guideposts.

## General Product Specifications (3 piece type)

|        |               |        |                             |   |                           |                       |
|--------|---------------|--------|-----------------------------|---|---------------------------|-----------------------|
| Rating | Rated current | 0.3A   | Operating temperature range | -55 to 85°C (Note 1)                        | Storage temperature range | -10 to +60°C (Note 2) |
|        | Rated voltage | 50V AC | Operating humidity range    | Relative humidity 95% max (No condensation) | Storage humidity range    | 40 to 70% (Note 2)    |

| Item                        | Requirements   | Conditions  |
|-----------------------------|--|---|
| 1. Insulation resistance    | 100MΩ min  | Measured at 100 V DC  |
| 2. Voltage resistance       | No flashover or breakdown  | 150 V AC applied for 1 minute   |
| 3. Contact resistance       | 8mm height : 80mΩ max<br>9mm height : 85mΩ max<br>10mm height : 90mΩ max<br>11mm height : 95mΩ max<br>12mm height : 100mΩ max<br>13mm height : 105mΩ max | Measured at 100 mA  |
| 4. Vibration resistance     | No electrical discontinuity for 1μs or greater<br>No damage, cracks, or parts looseness  | Frequency : 10 to 55 Hz, amplitude of 0.75mm in 3 axis directions, 10 cycles each.  |
| 5. Shock resistance         | No electrical discontinuity for 1μs or greater<br>No damage, cracks, or parts looseness  | Acceleration of 490m/s <sup>2</sup> , 11ms duration, sine half-wave waveform, for 3 cycles in both directions of each of the 3 axes |
| 6. Damp heat (Steady state) | Contact resistance change : 20 mΩ or less, insulation resistance of 100MΩ min, no damage, cracks, or parts looseness                                     | Temperature of 40°C, humidity of 90 to 95%, duration 96 h   |
| 7. Temperature cycle        | Contact resistance change : 20mΩ or less, insulation resistance of 100MΩ min, no damage, cracks, or parts looseness                                      | Temperature : -55°C → 15 to 35°C → 85°C → 15 to 35°C<br>Time : 30 min. → 2 to 3 min. → 30 min. → 2 to 3 min. for 5 cycles           |
| 8. Mating Cycles            | Contact resistance change : 20mΩ or less<br>No damage, cracks, or parts looseness  | 50 times  |

Note 1 : Includes temperature rise caused by current flow.

Note 2 : The term storage refers to unused products kept for a long time prior to board mounting. Operating temperature and humidity range are applicable to the non-conducting state after board assembly.

Note 3 : Information contained in this catalog represents general requirements for this series. Contact us for the drawings and specifications for a specific part number shown.

## Materials / Finish

| Part       | Material        | Finish                     | Notes   |
|------------|-----------------|----------------------------|---------|
| Insulator  | LCP             | Black/Gray                 | UL94V-0 |
| Contacts   | Phosphor bronze | Contact Area: Gold plating | ————    |
| Ground bar | Phosphor bronze | Ni plating                 | ————    |

## Product Number Structure

Refer to the chart below when determining the product specifications from the product number. Please select from the product numbers listed in this catalog when placing orders.

**FX10 - # IP - 36 DM1 - #H (#)**  

①
②
③
④
⑤
⑥
⑦
⑧

|   |  |
|---|--|
| ① Series Name : FX10  | ⑥ Pin configuration<br>Blank = Standard (all diff pairs),<br>M* =Reduced GND pins    |
| ② Pin count : 120, 144, 168 pins  |  |
| ③ Connector type IP : Interposer  | ⑦ Stacking height<br>8H : 8 to 10mm<br>8PH : 11 to 13mm                              |
| ④ Number of Diff-pairs  |  |
| ⑤ Signal type D : Diff. 100 ohm<br>Q : Diff. 85 ohm<br>(Blank) : Open pin field | ⑧ Specification suffix #<br>(Blank) : Ni1.5μm + Au0.1μm<br>(03) : Ni1.5μm + Au0.76μm |



## Interposer (3piece type)



Unit : mm

| Part No.               | HRS No.       | Signal type    | Differential pairs | Single-ended pins | Ground pins | A    | Remarks               |
|------------------------|---------------|----------------|--------------------|-------------------|-------------|------|-----------------------|
| FX10-168IP-40D-8H(**)  | 608-0001-3 ** | 100Ω           | 40                 | 4                 | 84          | 49.1 | For 8 to 10mm height  |
| FX10-168IP-40D-8PH(**) | 608-0004-1 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-168IP-52Q-8H(**)  | 608-0002-6 ** | 85Ω            | 52                 | 8                 | 56          |      | For 8 to 10mm height  |
| FX10-168IP-52Q-8PH(**) | 608-0005-4 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-168IP-8H(**)      | 608-0003-9 ** | Open pin field | 0                  | 168               | 0           |      | For 8 to 10mm height  |
| FX10-168IP-8PH(**)     | 608-0006-7 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-144IP-32D-8H(**)  | 608-0007-0 ** | 100Ω           | 32                 | 12                | 68          | 43.1 | For 8 to 10mm height  |
| FX10-144IP-32D-8PH(**) | 608-0011-7 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-144IP-44Q-8H(**)  | 608-0008-2 ** | 85Ω            | 44                 | 8                 | 48          |      | For 8 to 10mm height  |
| FX10-144IP-44Q-8PH(**) | 608-0010-4 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-144IP-8H(**)      | 608-0009-5 ** | Open pin field | 0                  | 144               | 0           |      | For 8 to 10mm height  |
| FX10-144IP-8PH(**)     | 608-0012-0 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-120IP-28D-8H(**)  | 608-0013-2 ** | 100Ω           | 28                 | 4                 | 60          | 37.1 | For 8 to 10mm height  |
| FX10-120IP-28D-8PH(**) | 608-0014-5 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-120IP-36Q-8H(**)  | 608-0015-8 ** | 85Ω            | 36                 | 8                 | 40          |      | For 8 to 10mm height  |
| FX10-120IP-36Q-8PH(**) | 608-0016-0 ** |                |                    |                   |             |      | For 11 to 13mm height |
| FX10-120IP-8H(**)      | 608-0017-3 ** | Open pin field | 0                  | 120               | 0           |      | For 8 to 10mm height  |
| FX10-120IP-8PH(**)     | 608-0018-6 ** |                |                    |                   |             |      | For 11 to 13mm height |

[Specifications number] -\*, (\*\*)  
 Blank : Contact plating Ni1.5μm+Au0.1μm  
 (03) : Contact plating Ni1.5μm+Au0.76μm

| Stacking height | Header (Mating side) | Interposer         | Header (Fixed side) |
|-----------------|----------------------|--------------------|---------------------|
| 8mm             | FX10#-xP-SV          | FX10-xIP-xD(Q)-8H  | FX10#-xP-SV         |
| 9mm             | FX10#-xP-SV          |                    | FX10#-xP-SV1        |
| 10mm            | FX10#-xP-SV1         |                    | FX10#-xP-SV1        |
| 11mm            | FX10#-xP-SV2         | FX10-xIP-xD(Q)-8PH | FX10#-xP-SV1        |
| 12mm            | FX10#-xP-SV3         |                    | FX10#-xP-SV1        |
| 13mm            | FX10#-xP-SV4         |                    | FX10#-xP-SV1        |

## ■ Signal integrity (2 piece type)

### ● Pin assignment


To match 100 ohm differential impedance and to reduce crosstalk, a staggered GSGSG pin assignment is recommended. (G=ground and S=signal)




### ● Impedance

The differential impedance is 100 +/- 10 ohm for FX10 at 30 ps rise time (20% to 80%).


4mm (without GND)

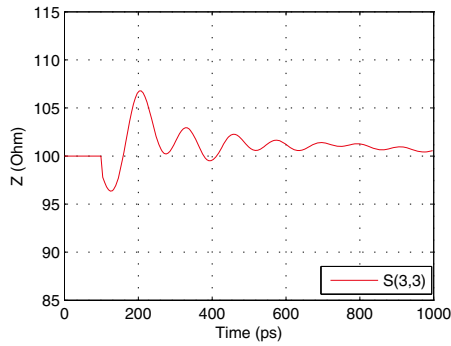


5mm (without GND)

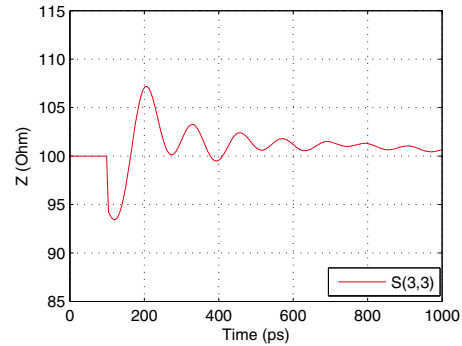

4mm (with GND)

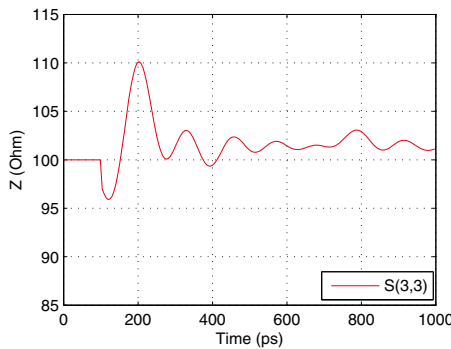

5mm (with GND)




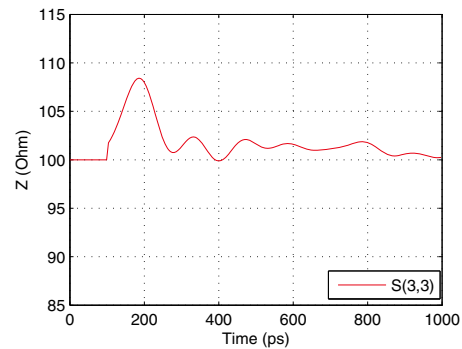


### ● Propagation delay

The propagation delay is 62 and 67 ps for FX10 of 4mm and 5mm height (with and without GND), respectively.





● Insertion loss

The differential insertion loss crosses 1dB at 10.8 and 9.2GHz for FX10 of 4mm and 5mm height, respectively.

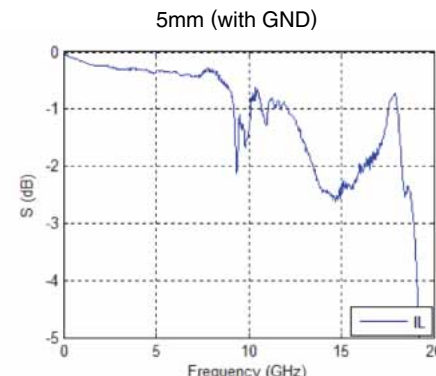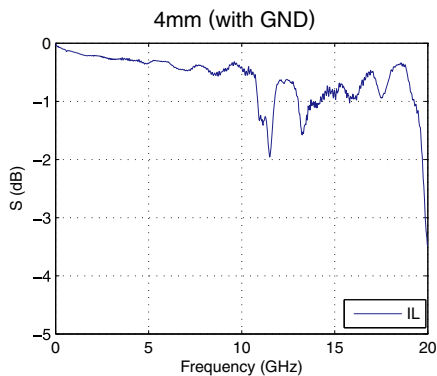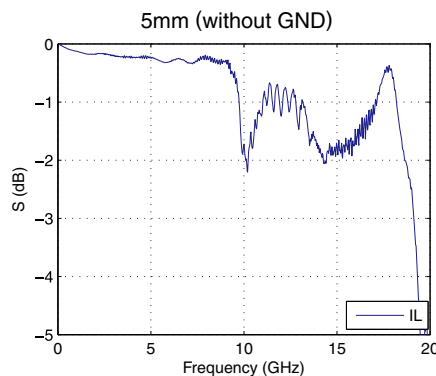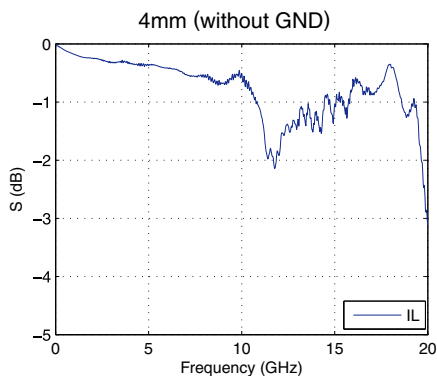



● Return loss

The differential return loss meets the IEEE 802.3ap specification to 20+ and 13.5 GHz for FX10 of 4mm and 5mm height, respectively.

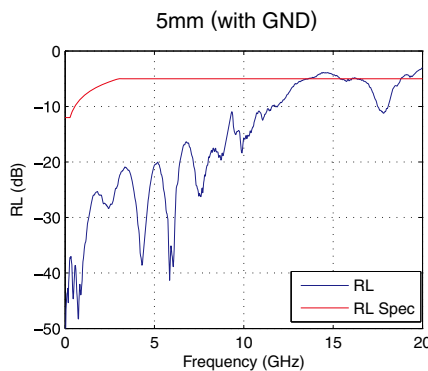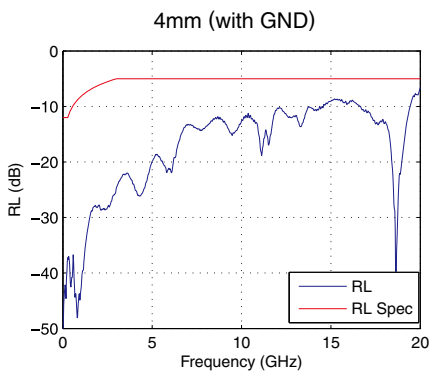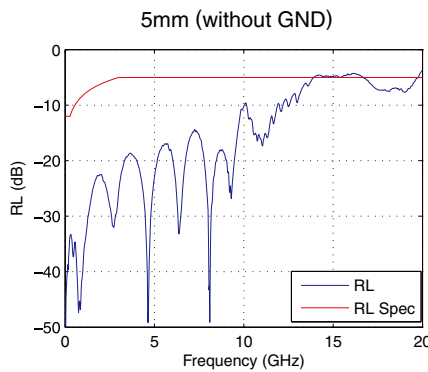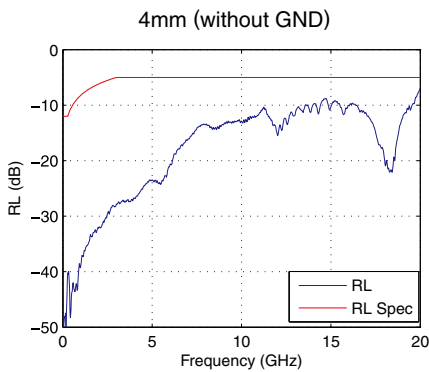





● **Near-end crosstalk (NEXT)**

The staggered GSGSG pin assignment results in low differential NEXT between neighboring pairs.

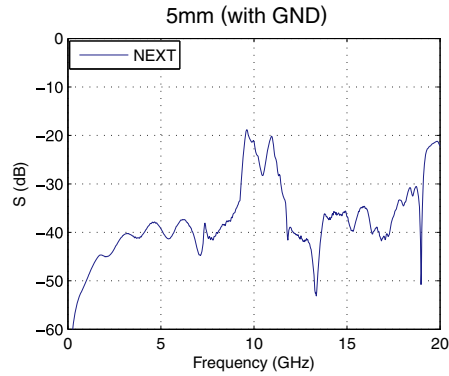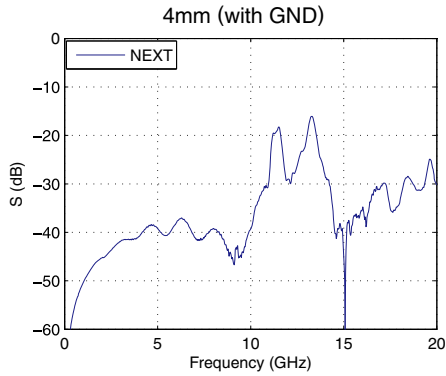





● **Far-end crosstalk (FEXT)**

The staggered GSGSG pin assignment results in low differential FEXT between neighboring pairs.

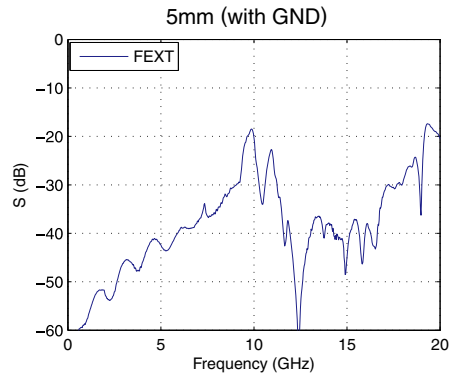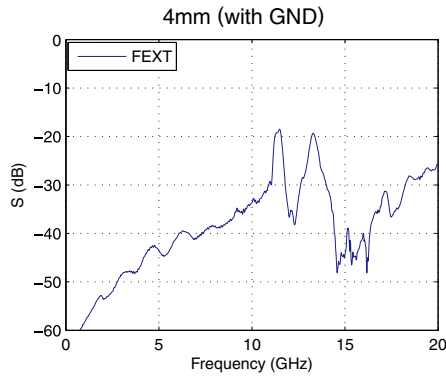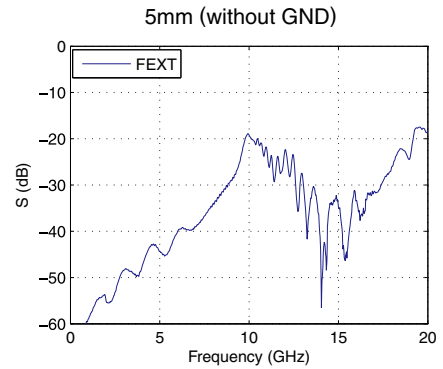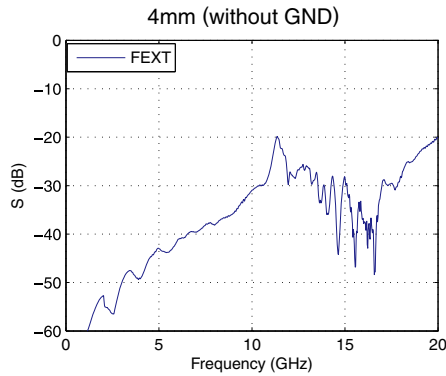

● Insertion-loss-to-crosstalk ratio (ICR)

The insertion-loss-to-crosstalk ratio (ICR) with five-aggressor differential FEXT meets the extrapolated IEEE 802.3ap specification to 10+ Gbps.

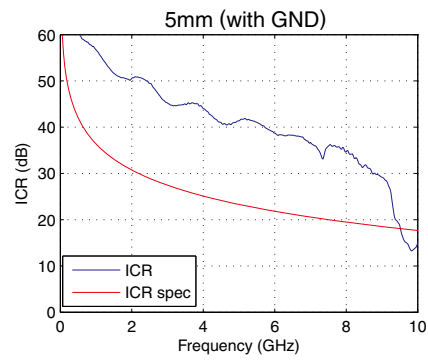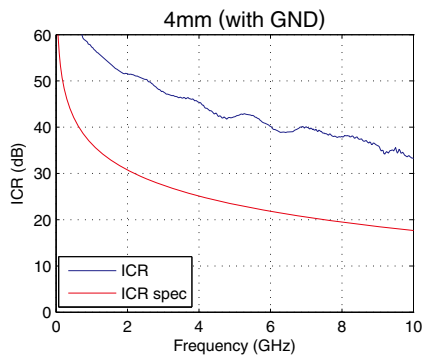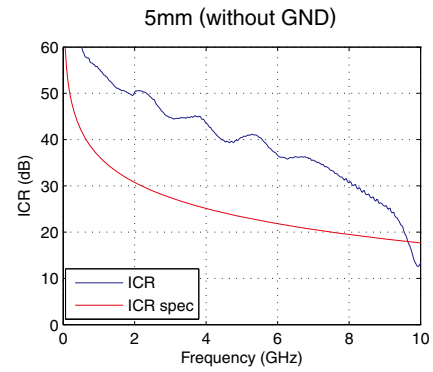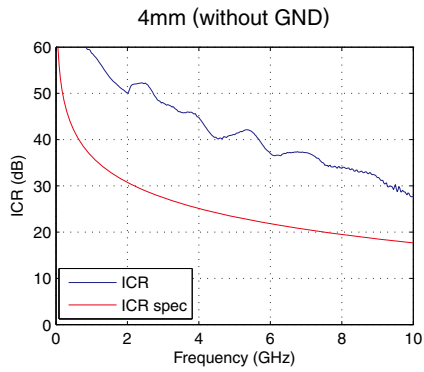


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## Signal integrity (3-piece type)


### Pin assignment

For 100 ohm type interposer, pin assignment shall be GSGSG.


For 85 ohm type interposer, pin assignment shall be GSSG.

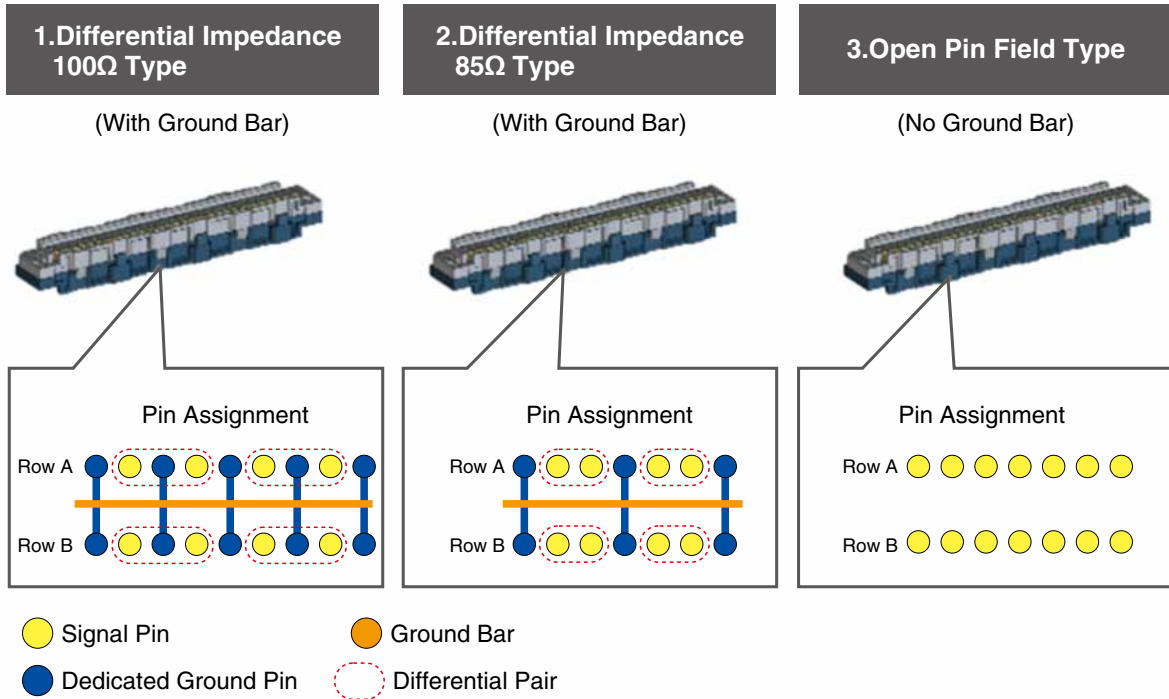

### Impedance

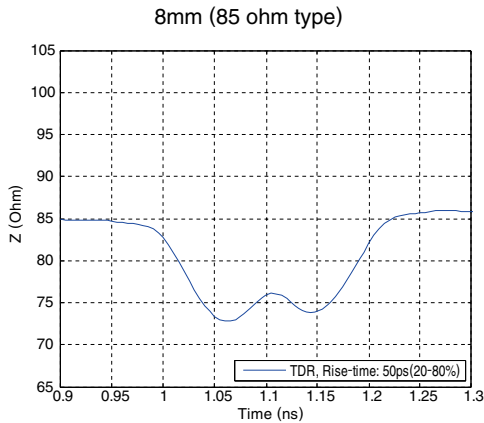


### Insertion Loss


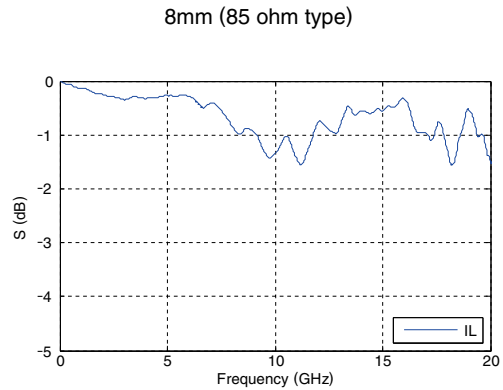


### Return Loss



The differential return loss meets the IEEE 802.3ap specification to 20+GHz for FX10 of 8mm height.

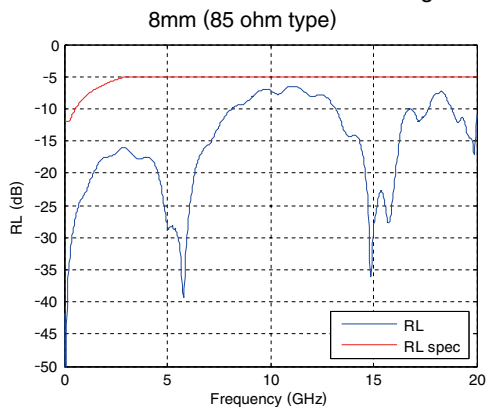

● Near-end crosstalk (NEXT)

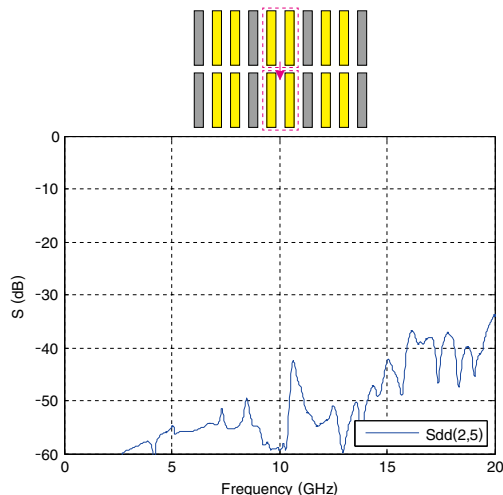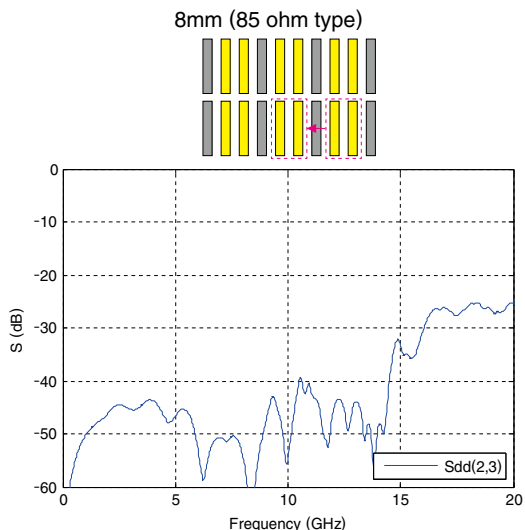


● Far-end crosstalk (FEXT)

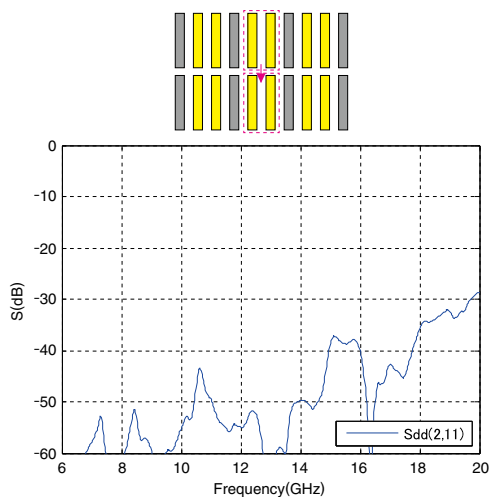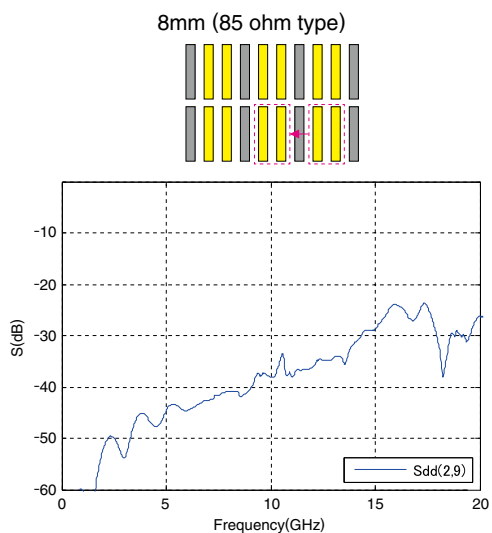


● Insertion-loss-to-crosstalk ratio (ICR)

The insertion-loss-to-crosstalk ratio (ICR) with five-aggressor differential FEXT meets the extrapolated IEEE 802.3ap specification to 15+Gbps.

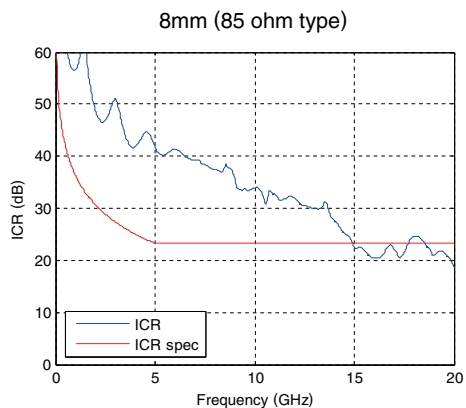

## ◆ Embossed Carrier Tape Dimensions


### ● Headers

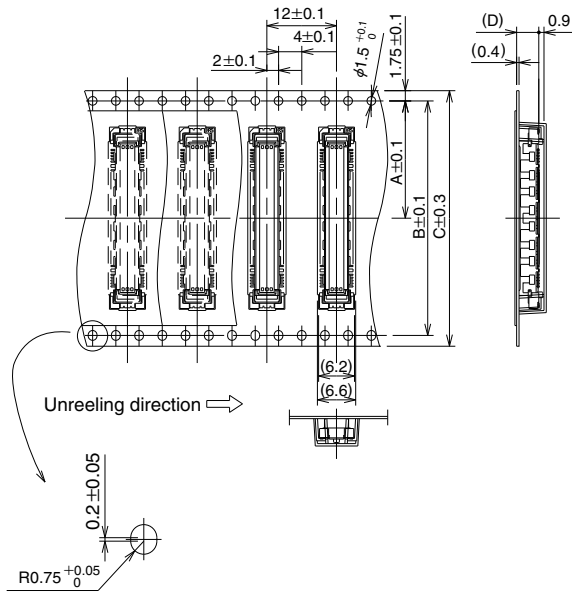

Unit : mm

| Insertion Connector | A    | B    | C  | D    | E    | F    | G   |
|---------------------|------|------|----|------|------|------|-----|
| FX10#-80P/8-SV      | 20.2 | 40.4 | 44 | 3.8  | 45.5 | 50.5 | 330 |
| FX10#-100P/10-SV    | 26.2 | 52.4 | 56 |      | 59   | 64   |     |
| FX10#-120P/12-SV    |      |      |    |      | 76.5 | 81.5 |     |
| FX10#-140P/14-SV    | 34.2 | 68.4 | 72 |      | 45.5 | 50.5 |     |
| FX10#-96P-SV        | 20.2 | 40.4 | 44 |      | 59   | 64   |     |
| FX10#-120P-SV       | 26.2 | 52.4 | 56 |      | 76.5 | 81.5 |     |
| FX10#-144P-SV       | 26.2 | 52.4 | 56 | 4.8  | 59   | 64   | 370 |
| FX10#-168P-SV       |      |      |    |      | 34.2 | 68.4 |     |
| FX10#-80P/8-SV1     | 20.2 | 40.4 | 44 |      | 45.5 | 50.5 |     |
| FX10#-100P/10-SV1   | 26.2 | 52.4 | 56 |      | 59   | 64   |     |
| FX10#-120P/12-SV1   |      |      |    |      | 76.5 | 81.5 |     |
| FX10#-140P/14-SV1   | 34.2 | 68.4 | 72 |      | 45.5 | 50.5 |     |
| FX10#-96P-SV1       | 20.2 | 40.4 | 44 | 59   | 64   |      |     |
| FX10#-120P-SV1      | 26.2 | 52.4 | 56 | 76.5 | 81.5 |      |     |
| FX10#-144P-SV1      | 34.2 | 68.4 | 72 |      | 59   | 64   |     |
| FX10#-168P-SV1      |      |      |    |      | 76.5 | 81.5 |     |

### ● Receptacles

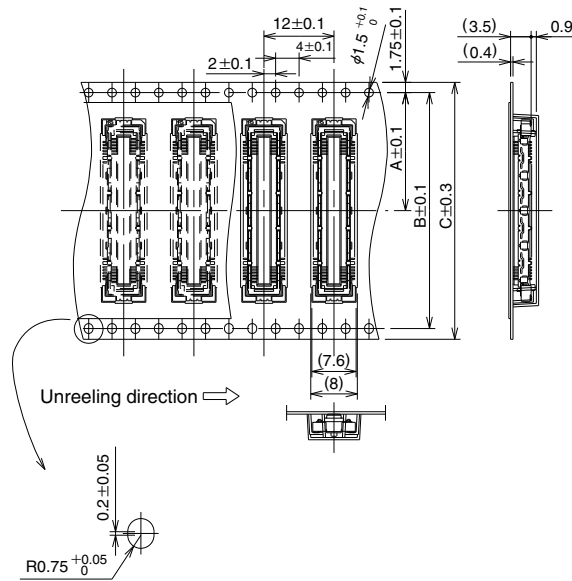


Note : There is no polarity with respect to embossed tape packaging for this product.

Unit : mm

| Insertion Connector | A    | B    | C  | E    | F    | G    |
|---------------------|------|------|----|------|------|------|
| FX10#-80S/8-SV      | 20.2 | 40.4 | 44 | 45.5 | 50.5 | 330  |
| FX10#-100S/10-SV    | 26.2 | 52.4 | 56 | 59   | 64   |      |
| FX10#-120S/12-SV    |      |      |    | 76.5 | 81.5 |      |
| FX10#-140S/14-SV    | 34.2 | 68.4 | 72 | 45.5 | 50.5 |      |
| FX10#-96S-SV        | 20.2 | 40.4 | 44 | 59   | 64   |      |
| FX10#-120S-SV       | 26.2 | 52.4 | 56 | 76.5 | 81.5 |      |
| FX10#-144S-SV       | 34.2 | 68.4 | 72 |      | 59   | 64   |
| FX10#-168S-SV       |      |      |    |      | 76.5 | 81.5 |


Note : There is no polarity with respect to embossed tape packaging for this product.

### ● Reel Dimensions

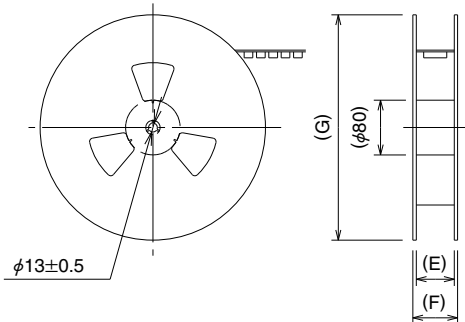



## ◆ Recommended Temperature Profile

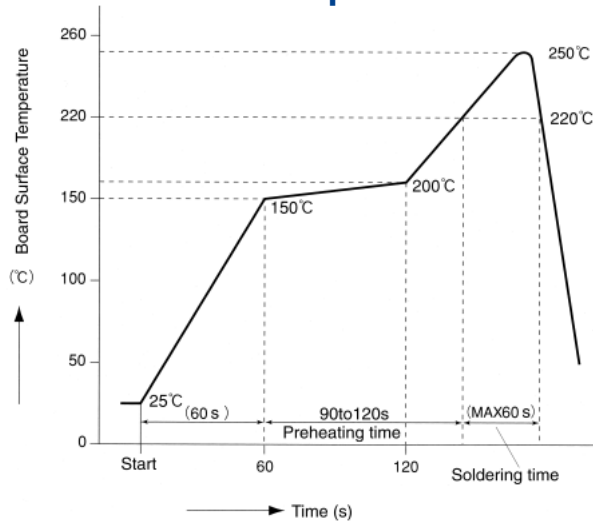

### HRS test Conditions

Test board Glass epoxy 161mm×100mm×1.6mm thick  
 Solder method : Reflow  
 Solder composition : Paste, 96.5%Sn/3%Ag/0.5%Cu  
 Metal mask : 0.15mm thick  
 Reflow cycles : 2 cycles

The temperature profile is based on the above conditions. In individual applications the actual temperature may vary, depending on solder paste type, volume/thickness and board size/thickness. Consult your solder paste and equipment manufacturer for specific recommendations.

## ◆ Washing Conditions

### Organic Solvent Cleaning

| Solvent                        | Room temperature washing | Heated washing |
|--------------------------------|--------------------------|----------------|
| IPA (Isopropyl alcohol)        | ○                        | ○              |
| HCFC (Hydrochlorofluorocarbon) | ○                        | ○              |

### Water Type Cleaning

When using water based cleaning agents (e.g., terpene, alkali saponifiers) make sure the labeling discloses any effect on metals, platings and plastics. Remove any moisture after cleaning. Residual flux or cleaning agents in the contact areas may affect the electrical performance.

### Cleaning Precautions

Residual flux or cleaning agents in the contact areas may affect the electrical performance. Please make sure a thorough cleaning operation has been completed.

## ◆ Connector Handling Precautions

### 1. Mating lengths and creepage distance

The effective wipe length for this product is 1.1mm for the signal contact and 1 mm for the ground contact. Creepage of the header and receptacle during mating should be within 0.5 mm of the fully mated position.

### 2. PCB support



Note that boards should not be supported solely by the connectors themselves. Support should be in the form of spacers and screws or other suitable methods to support the boards.

### 3. Solder repairs

During repair, the flux could wick onto the contact area of the connector and cause reduced contact reliability. In this case, make sure you understand washing conditions before washing is implemented.

### 4. Miscellaneous

- Note that excessive twisting while inserting or withdrawing connectors will cause damage.

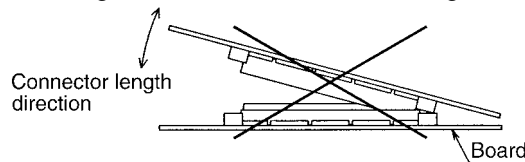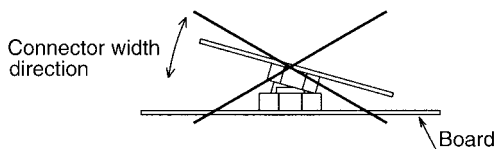


- Slight color differences on the molded items may be noted. However, these color differences will not affect the connector's performance.

## Spacer

Spacers are required to support the PWB's and protect the SMT solder joints.


Suggested spacer style is shown below:

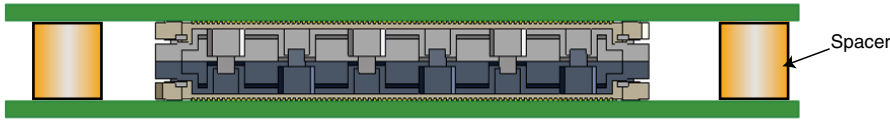

Spacer, male-male, M3 thread

The recommended spacer height corresponds to the interposer stacking height as shown in the chart below.

| Stacking height | Recommended spacer height | Remark       |
|-----------------|---------------------------|--------------|
| 4mm             | 4.3 ± 0.127mm             | 2 piece type |
| 5mm             | 5.3 ± 0.127mm             |              |
| 6mm             | 6 ± 0.127mm               |              |
| 7mm             | 7 ± 0.127mm               |              |
| 8mm             | 8 ± 0.127mm               |              |
| 8mm             | 8 ± 0.127mm               | 3 piece type |
| 9mm             | 9 ± 0.127mm               |              |
| 10mm            | 10 ± 0.127mm              |              |
| 11mm            | 11 ± 0.127mm              |              |
| 12mm            | 12 ± 0.127mm              |              |
| 13mm            | 13 ± 0.127mm              |              |

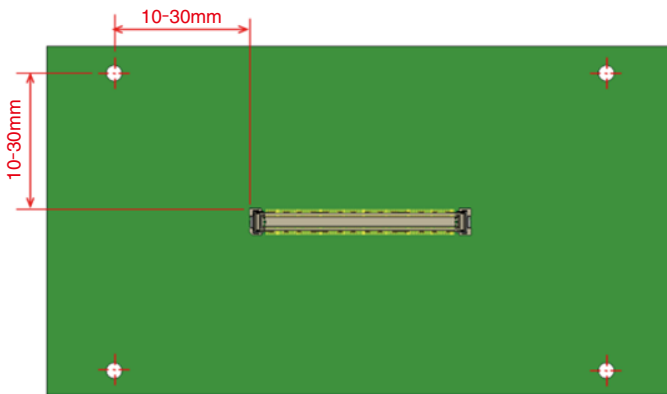


### Recommended spacer location

Four spacers located diagonally are required. Spacers should be located 10 to 30mm from the connector to prevent excessive mechanical loading on the interconnections. If assembly will be subjected to vibration, spacer should be located to prevent resonance, and additional spacer may be required.

## Interposer installation


Position the interposer directly over the mounting header. (Interposers have no polarity.) Fixed side (black side) of the interposer shall be mated with the mounting header (fixed side). Do not use SV2, SV3, or SV4 headers on both sides of the interposer. The wiping length on the mating side becomes shorter.

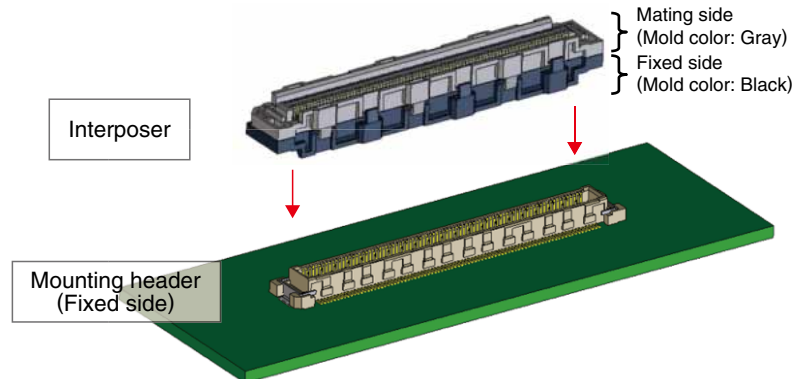

| Stacking height | Header (Mating side) | Interposer         | Header (Fixed side) |
|-----------------|----------------------|--------------------|---------------------|
| 8mm             | FX10#-xP-SV          | FX10-xIP-xD(Q)-8H  | FX10#-xP-SV         |
| 9mm             | FX10#-xP-SV          |                    | FX10#-xP-SV1        |
| 10mm            | FX10#-xP-SV1         |                    | FX10#-xP-SV1        |
| 11mm            | FX10#-xP-SV2         | FX10-xIP-xD(Q)-8PH | FX10#-xP-SV1        |
| 12mm            | FX10#-xP-SV3         |                    | FX10#-xP-SV1        |
| 13mm            | FX10#-xP-SV4         |                    | FX10#-xP-SV1        |
|                 |                      |                    | FX10#-xP-SV1        |

### ◆ Interposer removal

The interposer can be removed from the mounting header by hand. (No special tools are needed.) Removal and re-mating of the fixed side can reduce the extraction force of the fixed side due to wear. It is recommended to replace the interposer to a new one once removed.

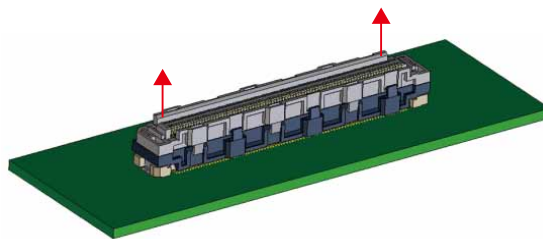

### ◆ Multiple Mating


#### <2-piece type>

It is not recommended to use multiple 2-piece FX10 connectors on the same PWB.




#### <3-piece type>

FX10 3-piece type has multiple mating capability. If multiple connectors are used on the same PWB, they must be oriented in the same direction. It is not recommended to mix orientations.

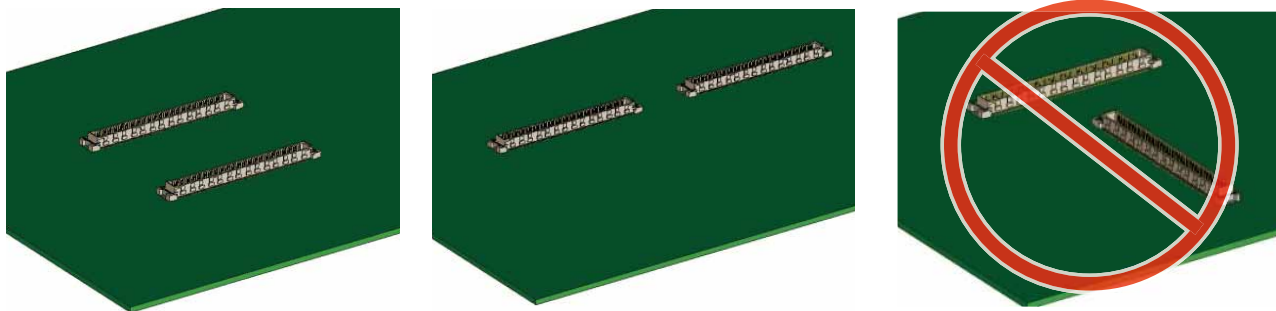

#### ● Mating tolerance (3-piece type)

Due to the floating interposer, FX10 3-piece type can accept mating tolerances of up to  $\pm 0.15\text{mm}$  tolerance in the X-axis and up to  $\pm 0.15\text{mm}$  in the Y-axis.

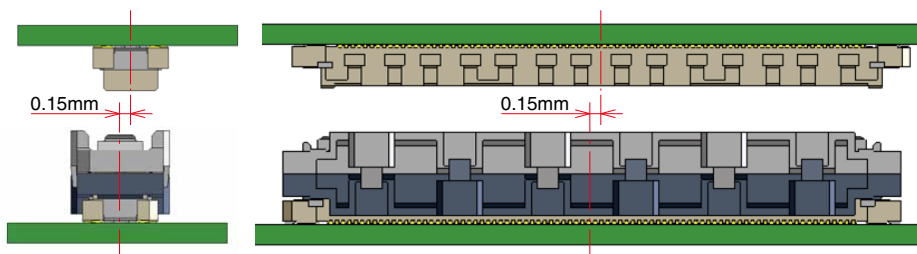

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE**  
 2300 Warrenville Road, Suite 150,  
 Downers Grove, IL 60515  
 Phone : +1-630-282-6700  
<http://www.hirose.com/us/>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE**  
 2841 Junction Ave, Suite 200  
 San Jose, CA. 95134  
 Phone : +1-408-253-9640  
 Fax : +1-408-253-9641  
<http://www.hirose.com/us/>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)**  
 17197 N. Laurel Park Drive, Suite 253,  
 Livonia, MI 48152  
 Phone : +1-734-542-9963  
 Fax : +1-734-542-9964  
<http://www.hirose.com/us/>

**THE NETHERLANDS:**

**HIROSE ELECTRIC EUROPE B.V.**  
 Hogehillweg #8 1101 CC Amsterdam Z-O  
 Phone : +31-20-6557460  
 Fax : +31-20-6557469  
<http://www.hirose.com/eu/>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH**  
 Schoenbergstr. 20, 73760 ostfildern  
 Phone : +49-711-456002-1  
 Fax : +49-711-456002-299  
<http://www.hirose.com/eu/>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. NUREMBERG OFFICE**  
 Neumeyerstrasse 22-26, 90411 Nurnberg  
 Phone : +49-911 32 68 89 63  
 Fax : +49-911 32 68 89 69  
<http://www.hirose.com/eu/>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE**  
 Bayernstr. 3, Haus C 30855 Langenhagen, Germany  
 Phone : +49-511 97 82 61 30  
 Fax : +49-511 97 82 61 35  
<http://www.hirose.com/eu/>

**FRANCE:**

**HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE**  
 Regus La Garenne Colombes, Place de La Belgique,  
 71 Boulevard National La Garenne Colombes, 92250, France  
 Phone : +33 (0) 1 7082 3170  
 Fax : +33 (1) 7082 3101  
<http://www.hirose.com/eu/>

**UNITED KINGDOM:**

**HIROSE ELECTRIC EUROPE BV (UK BRANCH)**  
 4 Newton Court, Kelvin Drive, Knowlhill,  
 Milton Keynes, MK5 8NH  
 Phone : +44-1908 202050  
 Fax : +44-1908 202058  
<http://www.hirose.com/eu/>

**CHINA:**

**HIROSE ELECTRIC (SHANGHAI) CO., LTD.**  
 1601, Henderson Metropolitan, NO.300, East Nanjing  
 Road, Huangpu District, Shanghai, China 200001  
 Phone : +86-21-6391-3355  
 Fax : +86-21-6391-3335  
<http://www.hirose.com/cn/>

**CHINA:**

**HIROSE ELECTRIC (SHANGHAI) CO.,LTD. BEIJING BRANCH**  
 A1001, Ocean International Center, Building 56# East 4th  
 Ring Middle Road, ChaoYang District, Beijing, 100025  
 Phone : +86-10-5165-9332  
 Fax : +86-10-5908-1381  
<http://www.hirose.com/cn/>

**CHINA:**

**HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.**  
 Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre,  
 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008  
 Phone : +86-755-8207-0851  
 Fax : +86-755-8207-0873  
<http://www.hirose.com/cn/>

**HONG KONG:**

**HIROSE ELECTRIC HONGKONG TRADING CO., LTD.**  
 Room 1001, West Wing, Tsim Sha Tsui Centre, 66  
 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong  
 Phone : +852-2803-5338  
 Fax : +852-2591-6560  
<http://www.hirose.com/hk/>

**TAIWAN:**

**HIROSE ELECTRIC TAIWAN CO., LTD.**  
 103 8F, No.87, Zhengzhou Rd., Taipei  
 Phone : +886-2-2555-7377  
 Fax : +886-2-2555-7350  
<http://www.hirose.com/tw/>

**KOREA:**

**HIROSE KOREA CO.,LTD.**  
 250, Huimanggongwon-ro, Siheung-si,  
 Gyeonggi-do, Korea, 15083  
 Phone : +82-31-496-7000 or 7124  
 Fax : +82-31-496-7100  
<http://www.hirose.co.kr/>

**SINGAPORE:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD.**  
 10 Anson Road #26-16, International Plaza  
 079903, Singapore  
 Phone : +65-6324-6113  
 Fax : +65-6324-6123  
<http://www.hirose.com/sg/>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD. DELHI LIAISON OFFICE**  
 Office NO.552, Regus-Green Boulevard, Level5, Tower C,  
 Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India  
 Phone : +91-12-660-8018  
 Fax : +91-120-4804949  
<http://www.hirose.com/sg/>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE**  
 Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma  
 Gandhi (MG) Road, Bangalore 560 001, Karnataka, India  
 Phone : +91-80-4120 1907  
 Fax : +91-80-4120 9908  
<http://www.hirose.com/sg/>

**MALAYSIA:**

**PENANG REPRESENTATIVE OFFICE**  
 1-21-01, Suntech @ Penang Cybercity (1164), Lintang  
 Mayang Pasir 3,11950, Bayan Baru, Penang, Malaysia.  
 Phone : +604-619-2564  
 Fax : +604-619-2574  
<http://www.hirose.com/sg/>

**THAILAND:**

**BANGKOK OFFICE (REPRESENTATIVE OFFICE)**  
 Unit 4703, 47th FL., 1 Empire Tower, South Sathorn  
 Road, Yannawa, Sathorn, Bangkok 10120 Thailand  
 Phone : +66-2-686-1255  
 Fax : +66-2-686-3433  
<http://www.hirose.com/sg/>



**HIROSE ELECTRIC CO.,LTD.**

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN  
 TEL: +81-45-620-3526 Fax: +81-45-591-3726  
<http://www.hirose.com>  
<http://www.hirose-connectors.com>