


5341H Series T-1 3/4 Ultra Brite LED

Description and Features

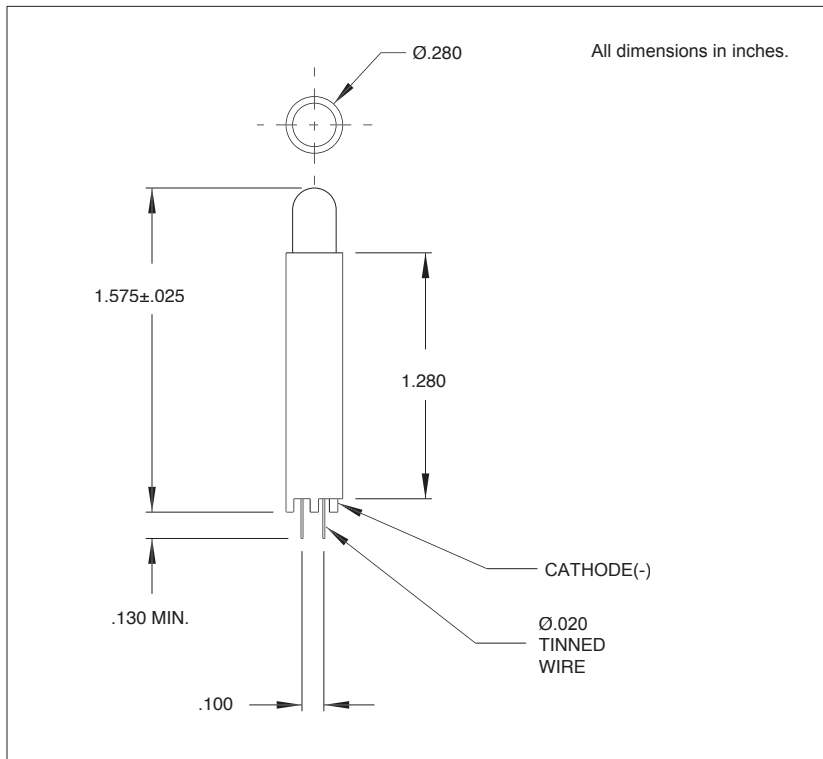

Features

- Block mounting, height and spacing alignment-saves assembly cost and time.
- Ultra Brite -T1 3/4 LED, non-diffused narrow beam high intensity light.
- Standoffs prevent flux entrapment.
- RoHS Compliant

Housing: Black Nylon, UL94V -O

Note: Alternate LEDs are also available in this package as a standard variation.

Electro-Optical Characteristics and Ratings

| Part Number | Emitted Color | Typical Intensity (mcd) | Rated Current (mA) | Continuous Forward Current Max. (mA) | Forward Voltage | | Reverse Breakdown Voltage Min. (V) | Peak Wavelength (nm) | Peak Forward Current at 1MS-300 PPS (A) |
|-------------|---------------|-------------------------|--------------------|--------------------------------------|-----------------|----------|------------------------------------|----------------------|---|
| | | | | | Typ. (V) | Max. (V) | | | |
| 5341H1 | Red | 120 | 20 | 35 | 2.0 | 3.0 | 5 | 635 | .1 |
| 5341H5 | Green | 120 | 20 | 20 | 2.1 | 2.5 | 4 | 565 | .09 |
| 5341H7 | Yellow | 120 | 20 | 35 | 2.1 | 3.0 | 5 | 585 | .1 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[5341H5](#) [5341H7](#) [5341H1](#)