

SUMMARY



Image is for illustrative purpose only

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | 1S |
| Termination type | Male solder |
| IP rating | 50 |
| Cable Ø | 5.20 - 6.20 mm |
| Matching parts | ERA.1S.275.CTL |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FFA*: Straight plug, cable collet |
| Keying | Circular (can rotate), plug has male contact(s) |
| Housing Material | Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces |
| Cable Fixing | C62: 5.2 - 6.2 mm |
| Variant | |

Performance

| | |
|---------------|--------------------------|
| Configuration | 1S.275 : 1 Coax (75 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 10 Amps |

Specifications

| |
|---------------------------------------|
| Contact Type: Coaxial 75 Ohm (Solder) |
| Max. Matings: 1000 |
| Contact Dia.: 1.3 mm (0.0512in) |
| Bucket Dia.: 1.1 mm (0.0432in) |
| Vtest: 2400 V (AC), 3300 V (DC) |
| Impedance: 75 Ohm |

VSWR: $1.02 + 0.08 * f/\text{GHz}$

Cable type: RG 179 B/U, RG 187 A/U, RG 58 C/U, RG 302 /U, RG 400 /U, 2YCCY, RG 59 B/U, RG 223 /U, HF-5408

Others

Endurance (Shell): 5000 mating cycles

Temp (min / max): $-55^{\circ}\text{C} / +250^{\circ}\text{C}$

Humidity (max): $\leq 95\%$ [at $60^{\circ}\text{C} / 140^{\circ}\text{F}$]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [6 ms]

Salt Spray Corrosion: >144 hr

Climatical Category: 50/175/21


Shielding (min): 75 dB (10 MHz)

Shielding (min): 40 dB (1 GHz)

IP Rating: 50

DRAWINGS

Draws

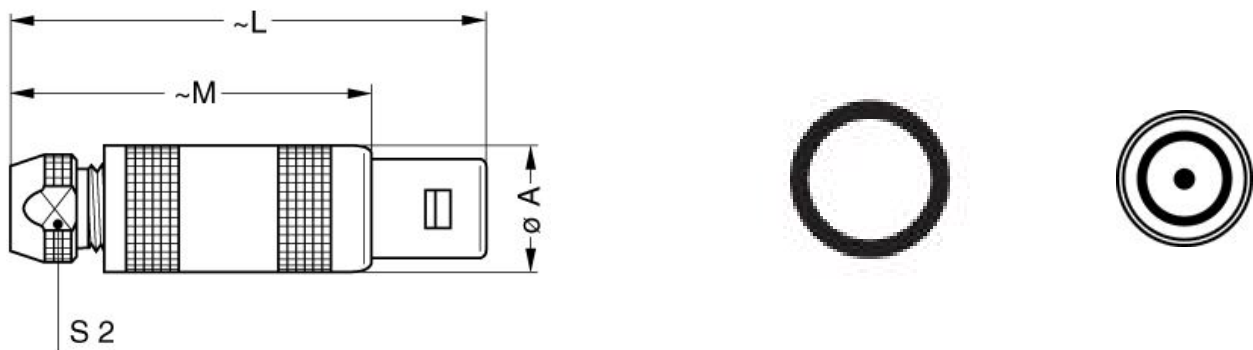

Dimensions

| | A | C | L | M | S2 |
|-----|------|------|------|------|------|
| mm. | 12 | 6.2 | 42.5 | 31.5 | 8.5 |
| in. | 0,47 | 0,24 | 1,67 | 1,24 | 0,33 |

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.1S.015.PA085

