

3

2

1


179610-1 : 本 ☒

179610-1 : AS SHOWN

NUMBER
C-179610



METRIC

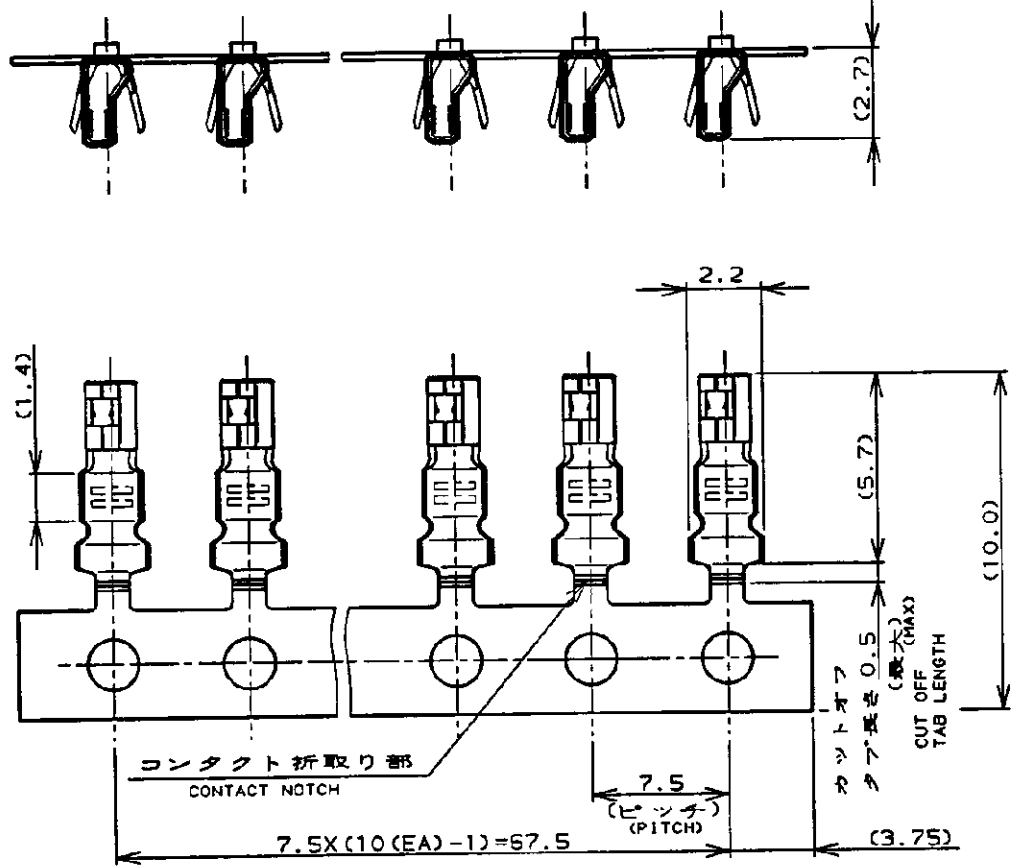

- 注,
- 1 材料 錫めっき済磷青銅(板厚0.2)
 - 2 運用製品規格, 108-5408
 - 3 取付運用規格, 114-5179
 - 4 連続状端子型番, 179609-1 (折取り部なし)

- NOTES,
- 1 MATERIAL PRE-TIN PHOS.BRO (THK 0.2)
 - 2 PRODUCT SPEC. ; 108-5408
 - 3 APPLICATION SPEC. ; 114-5179
 - 4 STRIP TERMINAL , 179609-1 (W/O NOTCH)

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

Copyright © 19__
AMP (Japan) .LTD.
ALL RIGHTS RESERVED.

AMP
AMP (JAPAN), LTD.
Tokyo, Japan

GENERAL TOLERANCE		WIRE RANGE	INSULATION DIA.
0mm ≤ 10 : ±0.2	10mm ≤ 30 : ±0.25	0.05 -0.12 mm ² (AWG 30-25)	0.65-1.35mmφ
30mm ≤ 100 : ±0.3	ANGLES : ±3°	MATERIAL SEE NOTE 1 注 参照	FINISH SEE NOTE 1 注 参照

PRINT DIST	0 RELEASED F300-4024-96	T/F	S/K	%	SCALE	SIZE	LOC	NUMBER	REV.	SHEET
LTR	REVISION RECORD	DR	CHK	DATE	—#	A	J	C-179610	0	1 OF 1
DR.	T. Saito 1/23/96	DE.	T. Saito 1/23/96	NAME	CRIMP TYPE II REC. CONTACT (L/P) 圧着タイプIIリセコンタクト (レコラ状) (AMP CTコネクタ 2mmピッチ) (AMP CT CONN. 2mm PITCH)					
CHK.	S. Kubouchi 1/23/96	APP.	S. Kubouchi 1/23/96							

AMP-J
REV. 10/83

CUSTOMER DRAWING