

## SUMMARY

### # Wires

Low	4
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male crimp
IP rating	50
Cable Ø	7.30 - 9.20 mm
Matching parts	CKB.M04.GYMG
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	∅ 7.3 - 9.2 mm
Variant	

### Performance

Configuration	CAB.M04 : 4 Low V.
Insulator	
Rated Current	15 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.85
Air clearance min. (mm) or Creepage distance min. (mm):	1.8

### Others


F ret (min):	150 N
--------------	-------

F ret (max): 250 N  
Steam sterilization: 20 times (with potting on rear connection)  
IP Rating: 50

---

## DRAWINGS

### Draws

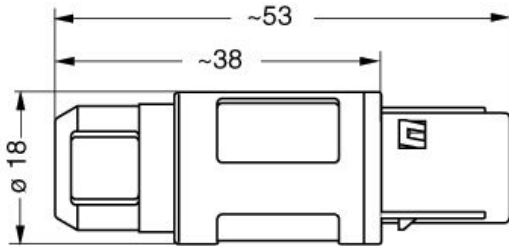

### Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

---

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V  
Crimp settings: AWG/Selector = 18-20/8-7  
Positionner: DCE.91.132.BVC  
Extractor: DCF.91.131.2LT  
Replacement contact: FGG.2B.565.ZZC

### Cables