
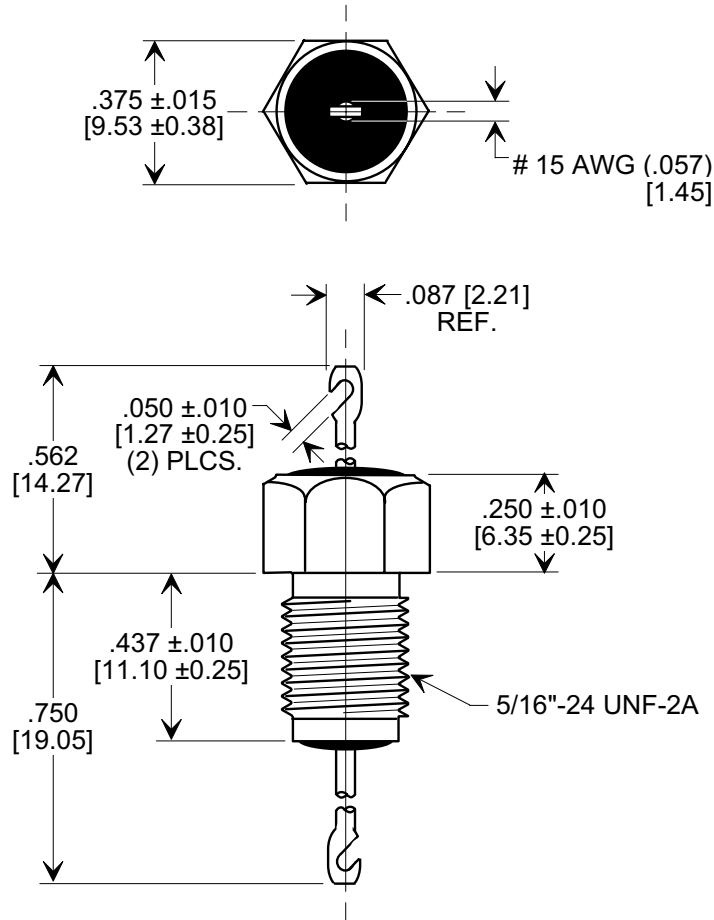


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

1. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. PARTS WILL BE MARKED M15733/61.

2000	500 VDC / 350 VAC	25 AC	I.R. MIN. @ 100 (VDC.)	DWV	----	55	70	70
	125 °C				10 MHz	100 MHz	1 GHz	10 GHz
MIN. CAP. (pF)	WORKING VOLTAGE	CURRENT (A)	10 G Ω	1250 VDC	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			

X-2015 Rev-0

REVISION RECORD Original Release C.O. 19990713-1-01 ADDED DWV, IR & DIM. .050. DIM .437 ±.010 WAS .436 ±.046 & .250±.010 WAS .250 ±.015. S.M. 11-10-03 20031110-4-01	1	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± N/A 3 PLC. DECIMAL ± .031 [0.79] ANGLES ± N/A TUSONIX TUCSON, ARIZONA	Title MIL-15733/61-0003 BUSHING STYLE FILTER		
	Drawn S.M. 07-15-99		Scale 2 X		
	Approved E.F. 07-15-99		A		
	4206-502		4206-502		