



REV.	DATE	ECR NO.	DESCRIPTION
NC	08/17/02	-	INITIAL RELEASE
A	03/16/09	-	REVISE PART DESCRIPTION, ADD NOTE 1.

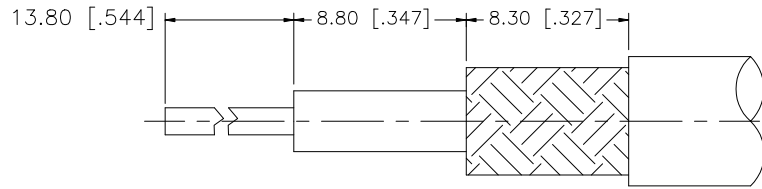

RECOMMENDED CABLE STRIPPING DIM'S

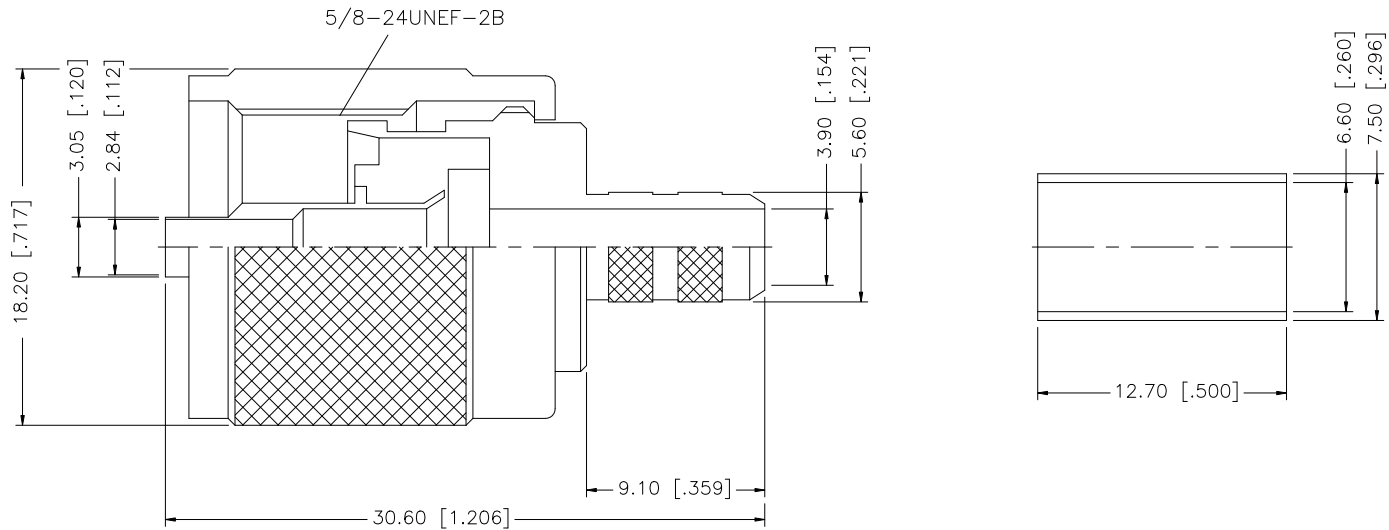

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<h1>Amphenol Connex</h1>					
8					DRAWN	GRS					03/16/09	<h2>UHF CRIMP PLUG (FOR RG-59/U CABLE)</h2>
7					CHECKED			PART NO. <b>182101</b>				
6					ISSUED							DWG. NO. 182101.DWG
5					SHEET	1 OF 1		REV. A    SIZE A    SCALE NA				
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm							CAD FILE C:/182/182101.DWG
3	CONTACT PIN	BER. COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"			DO NOT SCALE DRAWING				
2	INSULATOR	PHENOLIC	YELLOW	1								
1	BODY/SHELL	BRASS	NICKEL	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								