


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

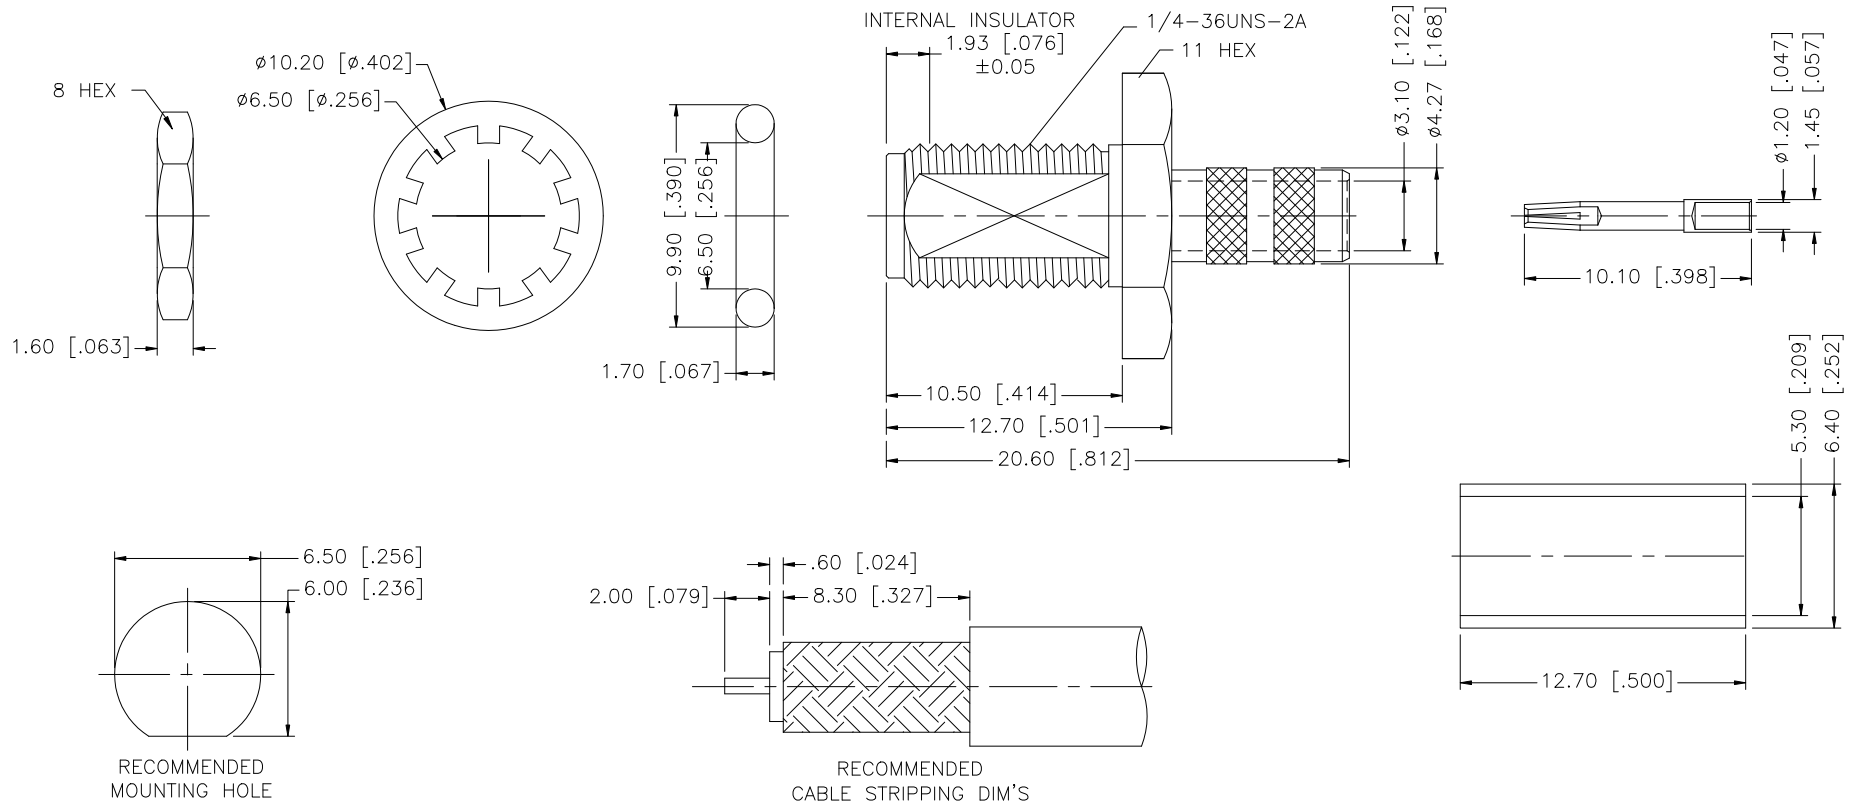

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION							
8							<h1 style="text-align: center; color: blue;">Amphenol Connex</h1> <p style="text-align: center;">SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)</p> <p style="text-align: center;">PART NO. <b>132280</b></p>							
7	FERRULE	COPPER	GOLD	1	DRAWN	GRS					04/30/08			
6	HEX NUT	BRASS	GOLD	1	CHECKED									
5	LOCK WASHER	BRASS	GOLD	1	ISSUED									
4	GASKET	SILICONE	RED	1	SHEET	1 OF 1								
3	CONTACT PIN	BER. COPPER	GOLD	1	CAD FILE	C:/132/132280.DWG	DWG. NO.	132280.DWG	REV.	A	SIZE	A	SCALE	NA
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	GOLD	1										

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm  $\pm 0.20$ mm  
8 - 30mm  $\pm 0.40$ mm  
30 - 120mm  $\pm 0.50$ mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  
.020 - .315 =  $\pm 0.007$ "  
.315 - 1.180 =  $\pm 0.015$ "  
1.180 - 4.724 =  $\pm 0.020$ "