


Number of contacts

78+2, 60+4, 42+6, 24+8

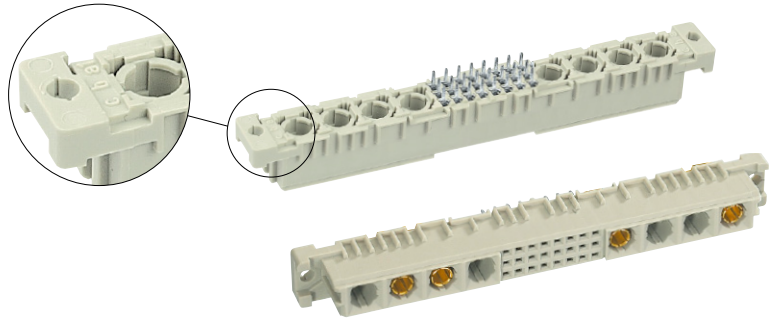

Female connectors

DIN Signal
up to 2 A

Identification	No. of contacts	Contact arrangement	Performance levels according to IEC 60 603-2. Explanation chapter 00			
			Part number 3	2	1	
Female connector with solder pins 2.9 mm (without special contacts)*	78 + 2		Performance level 3 on request	09 03 278 6864		
	60 + 4			09 03 478 6864 ^{b)}		
	42 + 6			09 03 260 6864		
	24 + 8			09 03 242 6864		
Female connector with solder pins 4.5 mm (without special contacts)*	78 + 2			09 03 278 6865		
	60 + 4			09 03 260 6865		
	42 + 6			09 03 242 6865		
	24 + 8			09 03 224 6865		
Female connector with press-in pins 4.5 mm (without special contacts)*	78 + 2			09 03 278 6830		
	60 + 4			09 03 260 6830		
	42 + 6			09 03 242 6830		
	24 + 8			09 03 224 6830		09 03 224 2830
Female connector with press-in pins 13 mm (without special contacts)*	78 + 2			09 03 278 6840		
	60 + 4			09 03 260 6840		09 03 260 2840
	42 + 6			09 03 242 6840		
	24 + 8			09 03 224 6840		
with press-in terminations for rear interfacing						
Usage of HARTING shroud recommended: contacts for rear interfacing selectively gold plated (performance level 3)						

* Pre-loaded with special contacts on request

^{b)} Connectors with snap-in clips see chapter 00