

Cable connector - MC 1,5/ 8-G-5,08 GY - 1701345

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 8 A, Number of positions: 8, Pitch: 5.08 mm, Color: gray, Contact surface: Tin, Mounting: Wave soldering



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
Custom tariff number	85366990
Country of origin	Germany

Technical data

Environmental Product Compliance

China RoHS	No hazardous substances above threshold values
------------	--

Dimensions

Pitch	5.08 mm
Dimension a	35.56 mm
Constructional height	8 mm
Length of the solder pin	3.4 mm

General

Range of articles	MC 1,5/...-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Color	gray
Number of positions	8


Standards and Regulations

Connection in acc. with standard	EN-VDE
	CSA

Cable connector - MC 1,5/ 8-G-5,08 GY - 1701345

Drawings

Diagram

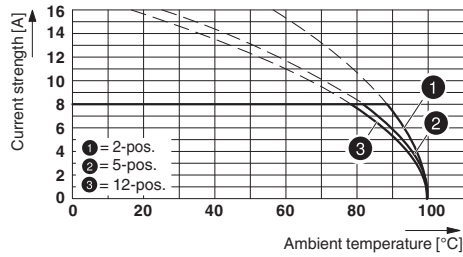

Type: MC 1,5/...-ST-5,08 with MC 1,5/...-G-5,08

Classifications

eCl@ss

eCl@ss 4.0	27141109
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals

Cable connector - MC 1,5/ 8-G-5,08 GY - 1701345


Approvals


Approvals

CSA / VDE Gutachten mit Fertigungsüberwachung / CCA / IECEE CB Scheme / EAC / cULus Recognized / EAC

Ex Approvals

Approval details

CSA  <http://www.csagroup.org/us/en/services/testing-and-certification/certified-product-listing> 13631

VDE Gutachten mit Fertigungsüberwachung  <http://www.vde.de> 40011723

CCA CCA/ DE1 34219

IECEE CB Scheme  <http://www.iecee.org/> DE1-56063-B1B2

EAC EAC-Zulassung

cULus Recognized <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> E60425-20110128

	B	D
Nominal current I _N	8 A	8 A
Nominal voltage U _N	300 V	300 V

EAC B.01742
