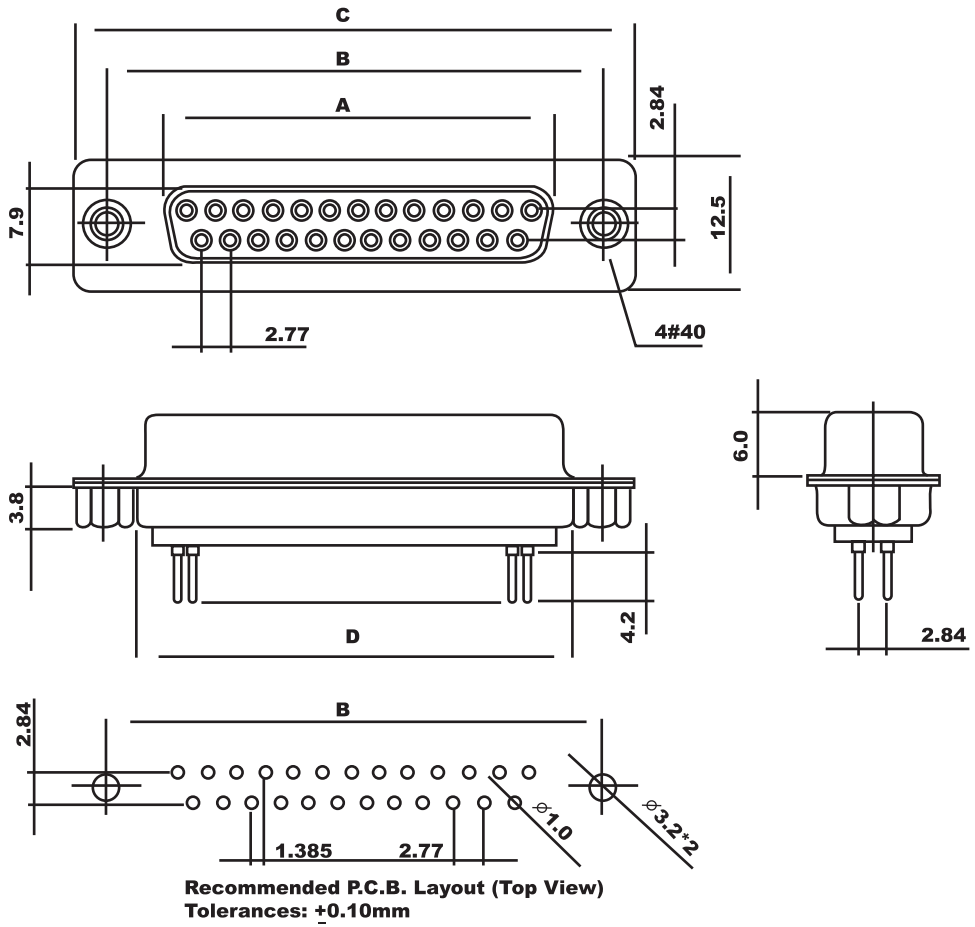

Recommended P.C.B. Layout (Top View)
Tolerances: ±0.10mm

Position	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3
50F	52.20	61.00	67.00	55.10

Specification:
Material:
Insulator: PBT, rated UL94V-0
Contacts: Brass
Shell: Steel
Rivet, Boardlock: Copper Alloy
Contact Plating:
Gold Flash over 50u"nickel
Electrical
Operation Voltage: 250 VAC max.
Current Rating: 3 Amps max.
Contact Resistance: 15 mohms max.
Insulation Resistance: 3000 Mohms min @ 500 VDC
Dielectric Withstanding Voltage: 1000 VAC/minute
Operating Temperature: -55°C to +105°C

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.16.11	Chappell
Approved		

ASSMANN WSW components

Item No. **A-DFxxPP-TAXM-B-R**

Title D-Sub Solder

Drawing No.

rev00

Replace

Sheet