


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	17	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER EC 0S14-0092-05	10DEC2005	REH	KW

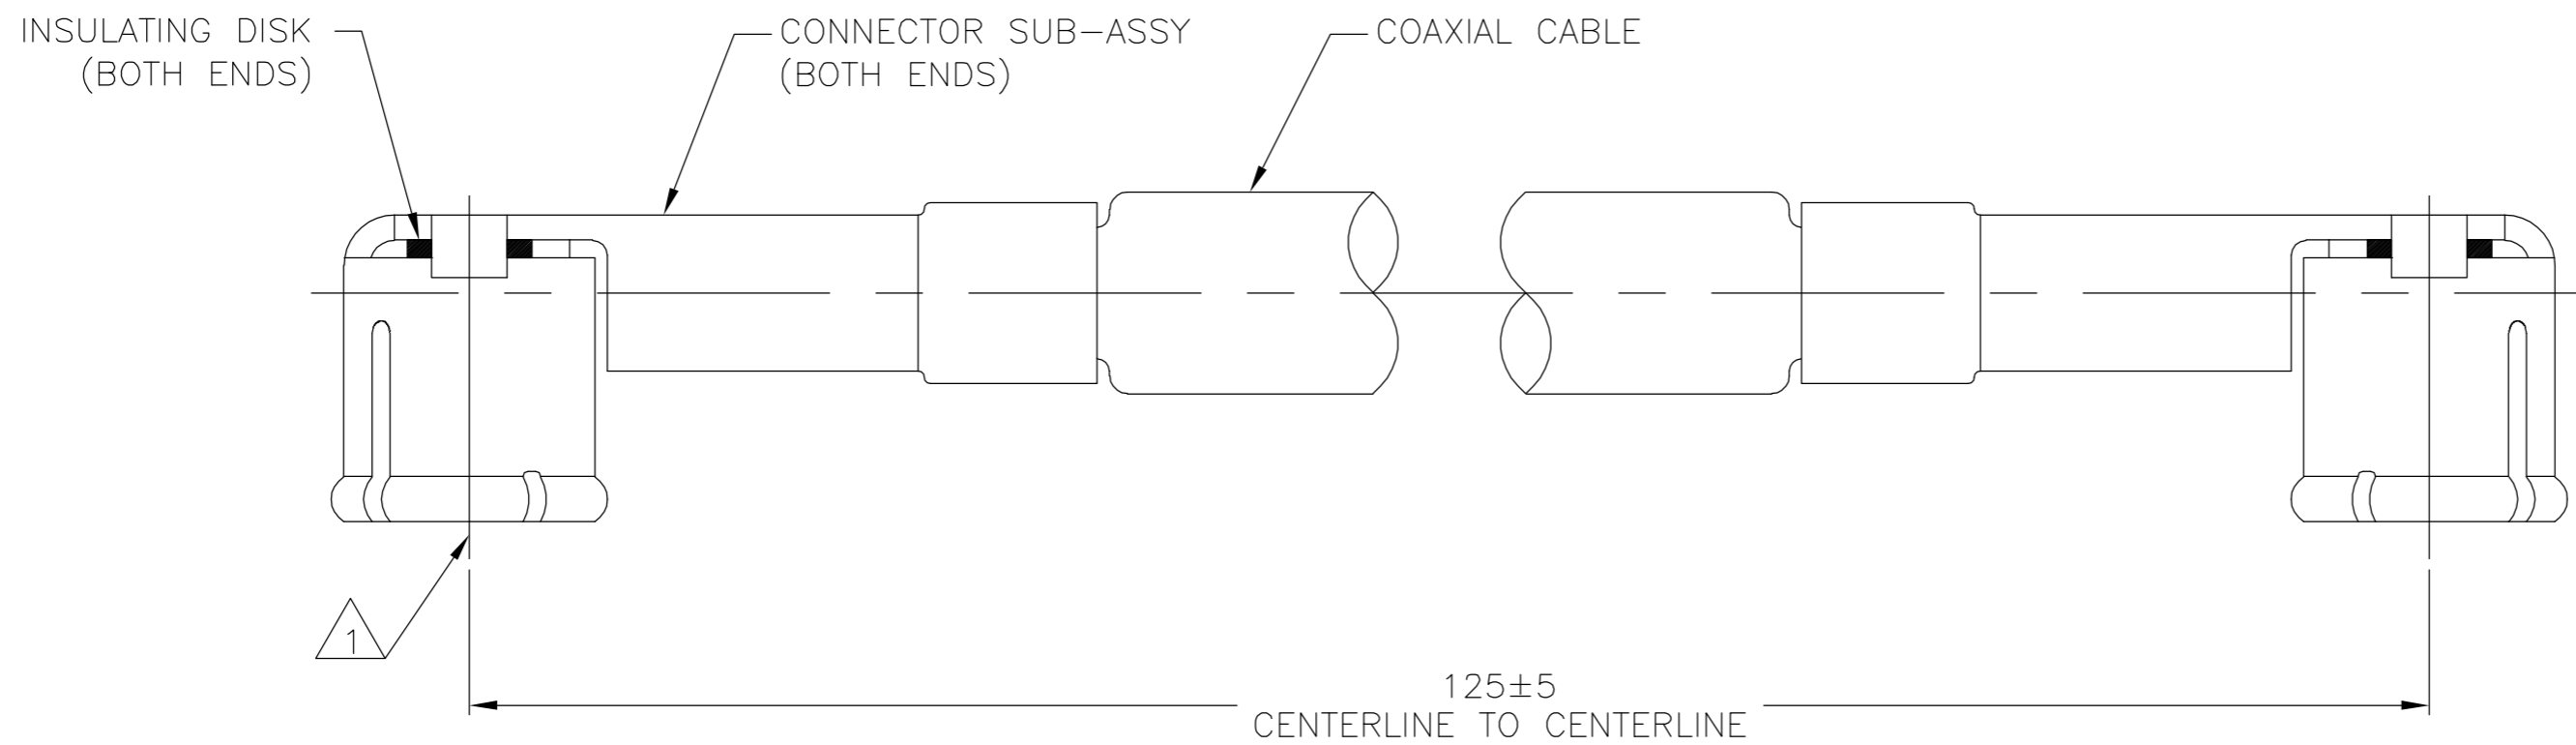

1064305-1  
PART NUMBER

1 CONNECTOR CENTERLINES SHALL BE ALIGNED WITHIN ±30°.

CONNECTOR	MATERIAL	FINISH
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE		
JACKET	POLYVINYL CHLORIDE (PVC)	N/A
SHIELD	SILVER PLATED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	PERFLUOROALKOXY (PFA)	N/A
CENTER CONDUCTOR	SILVER PLATED COPPER CLAD STEEL, 30 AWG	N/A
INSULATING DISK	POLYESTER	N/A
COMPONENT	MATERIAL	FINISH

<b>ELECTRICAL</b>	
FREQUENCY	DC - 6 GHz
NOMINAL IMPEDENCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL
<b>MECHANICAL</b>	
CONNECTOR DURABILITY	100 MATING CYCLES
<b>ENVIRONMENTAL</b>	
TEMPERATURE RATING	-40°C(-40°F) TO +105°C(221°F)

PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. RESNIC 24MAY91	tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK	NAME OSMT RIGHT ANGLE JACK TO JACK CABLE ASSY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD [Signature] 05/13/92	SIZE A2 CAGE CODE 00779 DRAWING NO C=1064305	
0 PLC ± -		PRODUCT SPEC	RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	SCALE 12:1 SHEET 1 OF 1 REV B	
2 PLC ± -		WEIGHT -		
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
FINISH -				