


PART NUMBER	ITEM ① N BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ MCX BODY	ITEM ⑤ MCX INTERFACE
134-1068-021	STAINLESS STEEL PASSIVATED	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	STAINLESS STEEL PASSIVATED	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN

DRAWING NO. C - 134-1068-021/030	
0	REVISIONS
ENGINEERING RELEASE	
1	6-23-99 R H J R J 8/17-12-99 ECN 46482
CHANGED: 1.0/8.0 LBS MIN/MAX DISENGAGE WAS 3.0 LBS TYP. 1.0 LBS MIN	
* REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLARIF. * * CATION OR PART NUMBER ADDITION ONLY. *	
1a	10-24-00 R H J R J ECN 47373

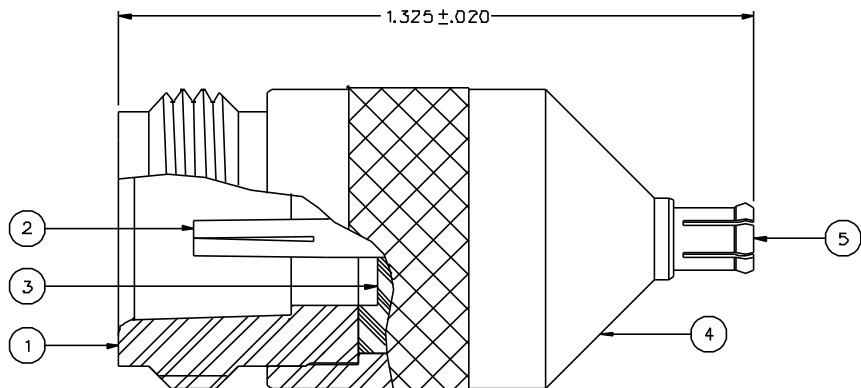

NOTES:

1. SPECIFICATIONS:

IMPEDENCE: 75 OHMS  
 FREQUENCY RANGE: 0-6 GHz  
 VSWR: 1.05-.01 F MAX (F IN GHz)  
 WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL  
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL  
 INSULATION RESISTANCE: 1000 MEGOHM MIN  
 CONTACT RESISTANCE:  
   CENTER CONTACT - INITIAL 5 MILLIOHM MAX. AFTER ENVIRONMENTAL 8 MILLIOHM MAX  
   OUTER CONDUCTOR - INITIAL 2.5 MILLIOHM MAX. AFTER ENVIRONMENTAL 3.5 MILLIOHM MAX  
 BRAID TO BODY - NOT APPLICABLE  
 CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET  
 INSERTION LOSS: NOT APPLICABLE  
 RF LEAKAGE: NOT APPLICABLE  
 RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 600 VRMS MIN AT 4 AND 7 MHz

MECHANICAL:

ENGAGE/DISENGAGE FORCE (MCX): 5.6 LBS MAX ENGAGEMENT  
   1.0/8.0 LBS MIN/MAX DISENGAGEMENT  
 MATING TORQUE (TYPE N): 6 IN-LB MIN WITH MATING PART  
 COUPLING PROOF TORQUE: NOT APPLICABLE  
 COUPLING NUT RETENTION: NOT APPLICABLE  
 CONTACT RETENTION: 4 LBS MIN AXIAL FORCE  
 CABLE ACCEPTABILITY: NOT APPLICABLE  
 CABLE HEX CRIMP SIZE: NOT APPLICABLE  
 CABLE RETENTION: NOT APPLICABLE  
 DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:


(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)  
 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B  
 OPERATING TEMPERATURE: -65°C TO -165°C  
 CORROSION: MIL-STD-202, METHOD 101, CONDITION B  
 SHOCK: MIL-STD-202, METHOD 213, CONDITION B  
 VIBRATION: MIL-STD-202, METHOD 204, CONDITION B  
 MOSTURE RESISTANCE: MIL-STD-202, METHOD 106

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED  
PER ANS Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY JRK	DATE 4-20-99	 <small>Cinch Connectivity Solutions 299 Johnson Ave, Ste. 100 Worcester, MA 01603 1-800-247-8256</small>	
DECIMALS .XX	CHECKED BY JRK	DATE 6-24-99	TITLE ASSEMBLY, ADAPTER 75 OHM TYPE N JACK TO 75 OHM MCX PLUG	
XXX	APPROVED BY RJB	DATE 6-28-99		
MATL	APPROVED BY	DATE	CODE NO.	DRAWING NO. C - 134-1068-021/030
FINISH	RELEASE DATE	7-12-99	SCALE	5:1 U/M INCH SHEET 2 OF 2