

MODEL:

PDU3VSR6L2120

3-Phase Switched Rack-Mount PDU



200-240V
3-Phase Input



NEMA L21-20P
Plug



200-240V
Single-Phase
Output



30 Switched
Outlets



6.7kW Load
Capacity



Multi-Function
Meter



Network
Interface




OU
Rackmount




Toolless
Mounting
Buttons



- A** Multi-Function Meter
- B** C13 and C19 Outlets with Multi-Function LEDs
- C** C13 and C19 Plug Inserts
- D** Removable Mounting Brackets
- E** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- F** 6 ft. Input Power Cord
- G** NEMA L21-20P Input Plug
- H** Durable Metal Case
- I** Network Interface
- J** RJ45 Ethernet Jack
- K** Manual Configuration Port
- L** Environmental Monitoring Port
- M** Network Interface Reset Button



AC Input Connection: Insert NEMA L21-20P plug into compatible utility, generator or UPS outlet.




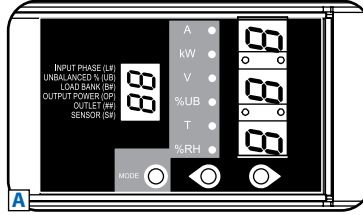


Multi-Function Meter: Displays the load for outlet, phase, bank or total output; displays temperature or humidity*; displays the IP address or rotate the display 180°.

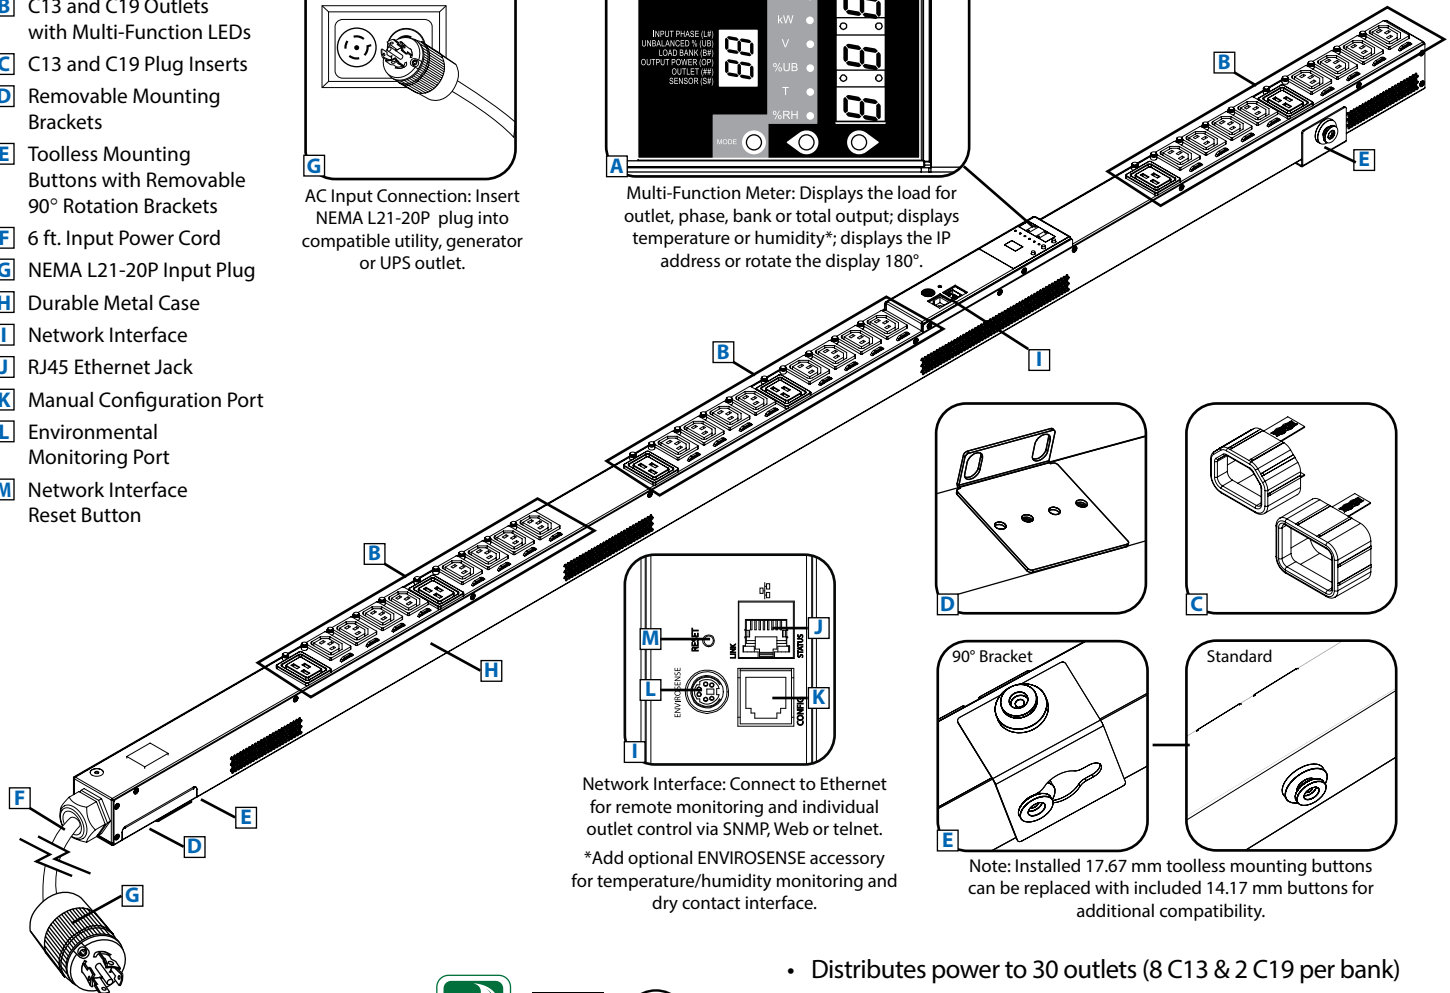

Network Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web or telnet.

*Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Model	PDU3VSR6L2120
Voltage	200-240V (3-Phase Input/Single-Phase Output)
Frequency	50/60 Hz
Load Capacity	6.7kW (240V), 6.4kW (230V), 6.1kW (220V), 5.8kW (208V), 5.5kW (200V)
Input Plug	NEMA L21-20P
Input Cord Length	6 ft.
Outlets	30 (24 C13 / 6 C19)
Primary Mounting Option	OU (Vertical) Rackmount
Unit Weight & Dimensions	14.2 lb. / 70 x 2.17 x 2.59 in. 6.5 kg / 1778 x 55 x 65.8 mm
Standards	See next page for detailed unit measurements. Tested to UL/CSA 60950-1 (US & Canada), NOM (Mexico), FCC Class A, RoHS, TAA Compliant









- Distributes power to 30 outlets (8 C13 & 2 C19 per bank)
- Remote monitoring and control via SNMP, Web or telnet
- Displays load for each outlet, bank and phase, and total output in real time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

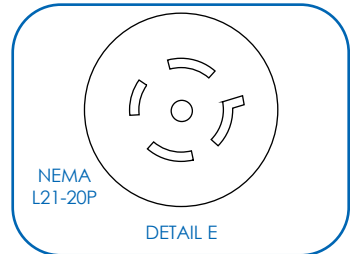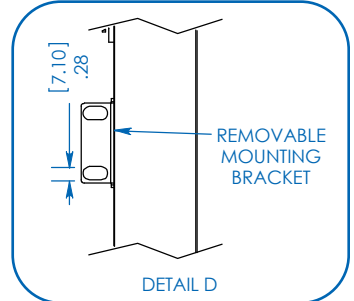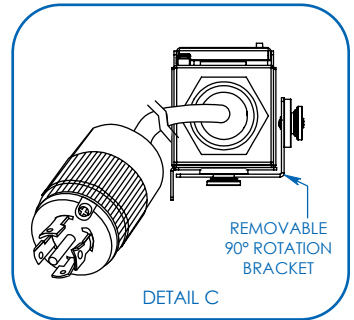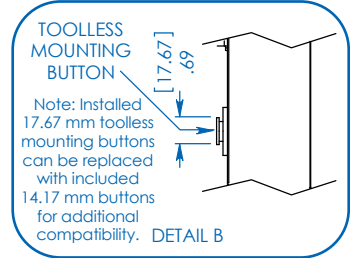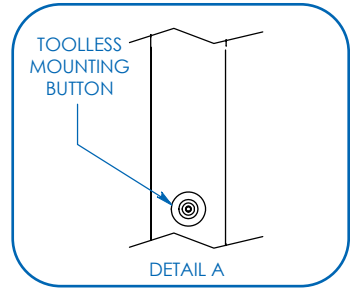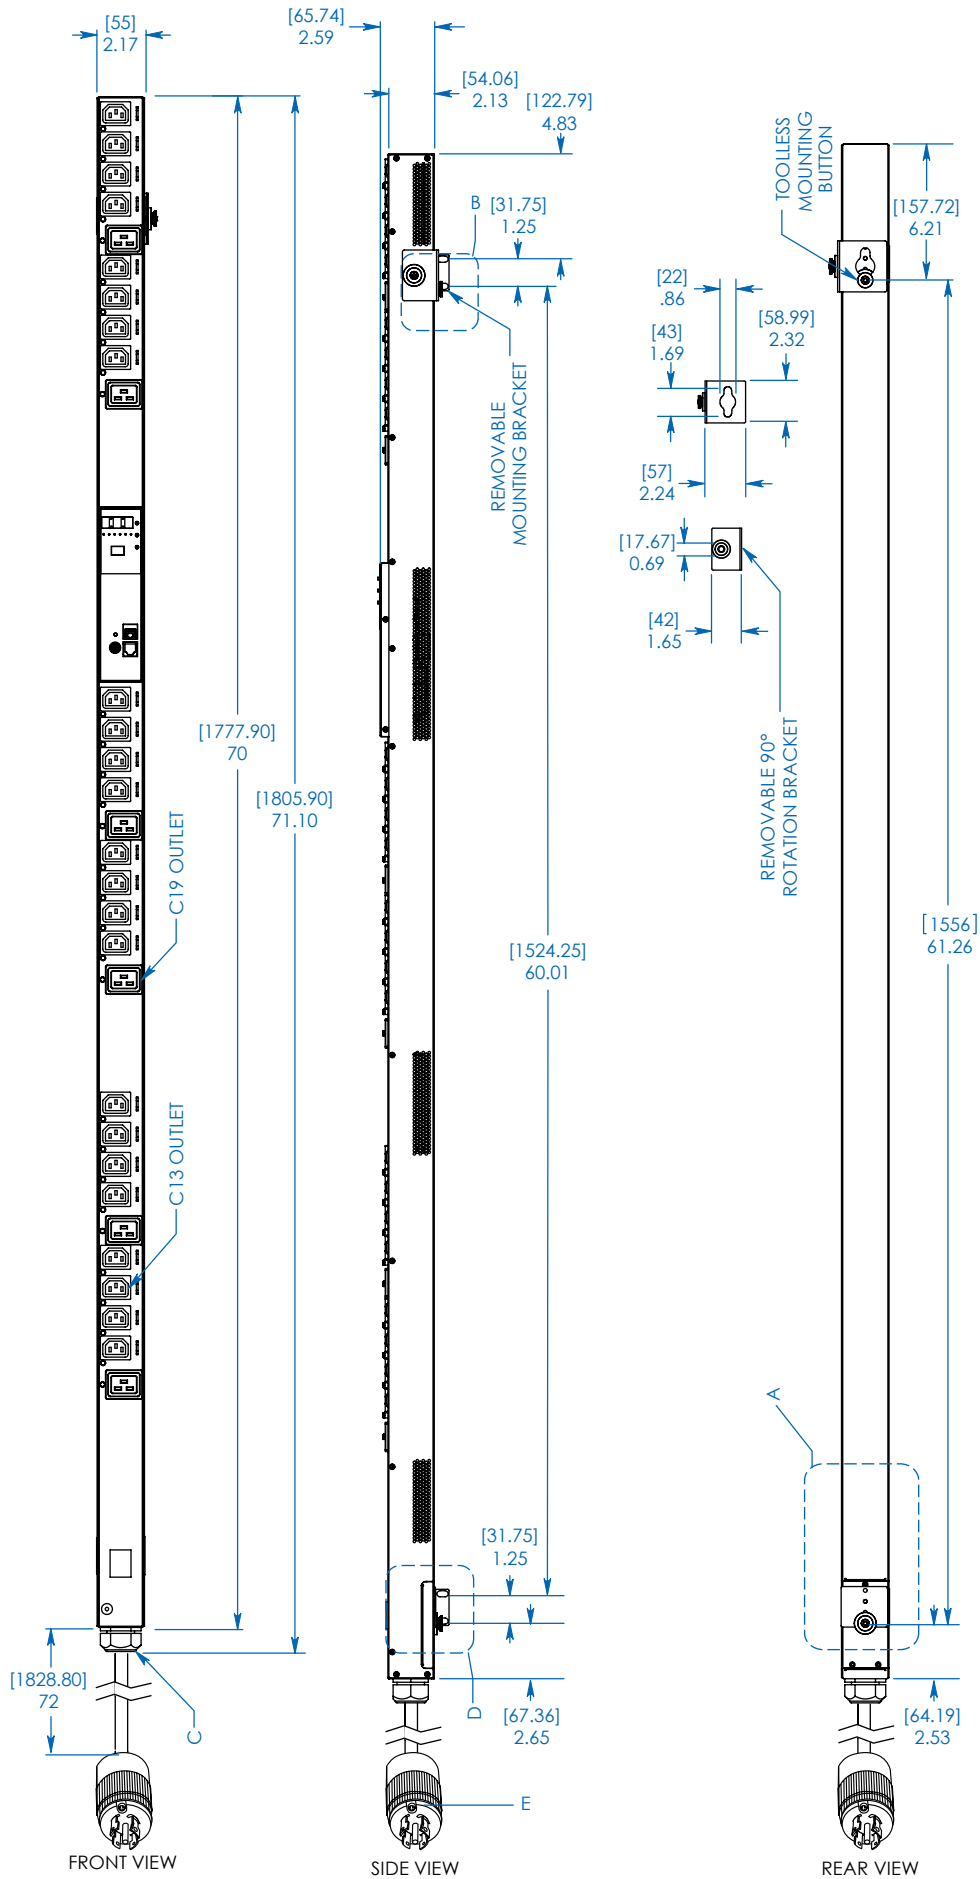

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU3VSR6L2120



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234

www.tripplite.com