



FCI
FCIconnect.com

Copyright FCI

1 | 2 | 3 | 4 | 5 | 6

A

B

C




D

A

B

C

D

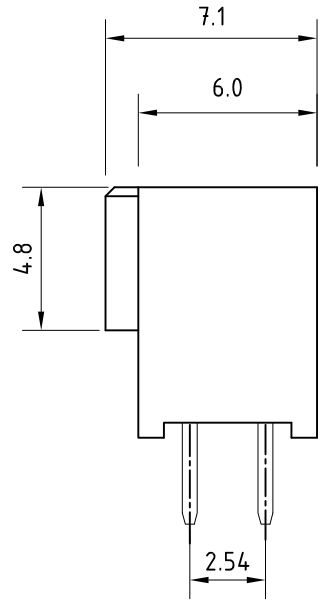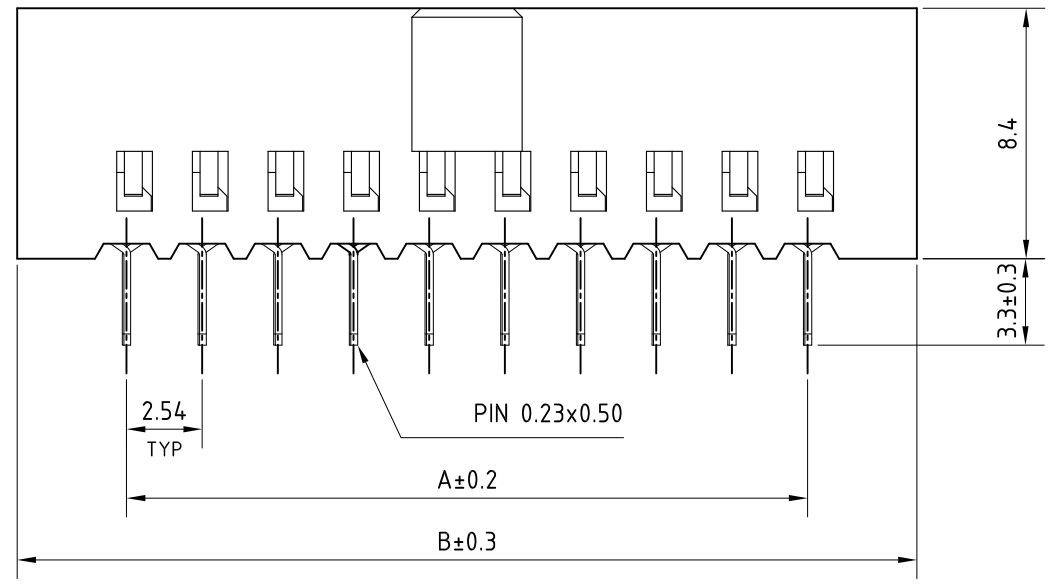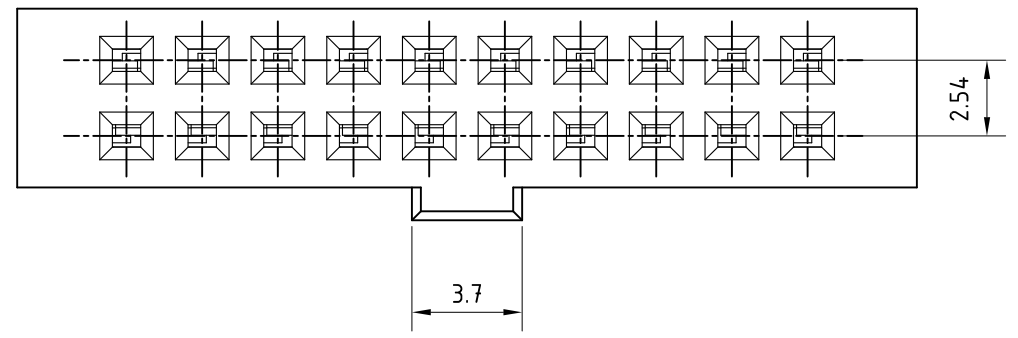

ORDERING INFORMATION

SERIES NO.	10121492 08 YO 7 LF	LEAD FREE
NO.OF CONTACTS	D/R - 8 & 20	PLATING 7 - GOLD FLASH SELECTIVE
		YO - STRAIGHT SOLDER


TECHNICAL SPECIFICATION

INSULATOR MATERIAL	: SELF EXTINGUISHING THERMOPLASTIC (UL94 V0)
CONTACT MATERIAL	: COPPER ALLOY
MAXIMUM VOLTAGE	: 1000 V rms.
NOMINAL CURRENT	: 3A AT 20°C
INSULATION RESISTANCE	: ≥ 5000 M Ω
CONTACT RESISTANCE	: ≤ 20 m Ω
CLIMATIC CATAGORY	: -55°C TO +125°C / 21 DAYS EXPOSURE TO- INDUSTRIAL ENVIRONMENT HUMIDITY TEST AS HE-14.

NOTES :
1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

A = 2.54 * No. OF SPACES
B = A + 7.34
* AVAILABLE CIRCUITS : 8 & 20

PCB DRILLING DETAILS

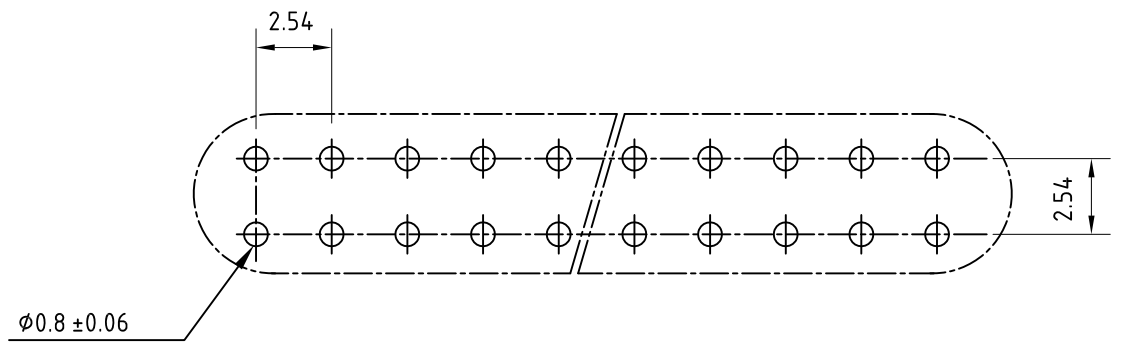

mat'l. code		surface		tolerance		projection		product family	
REF TECH SPEC		ISO 1302		ISO 406 ISO 1101				8614	
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		title	
A	-	GRM	2013-07-12	angles	linear	4:1		FEMALE CONNECTOR (DUAL ROW SS WITH POL.)	
				0°±1°				dwg no	
								sheet 1 of 1	
				dr	MINI K VANDANATH	2012-06-13		size	
				enr	ALEX BABU	2012-06-13		A3	
				chr	ALEX BABU	2012-06-13		10121492	
				appd	BIJU K P	2012-06-13		type Product Customer Drawing	
sheet index	revision sheet	A	1						