
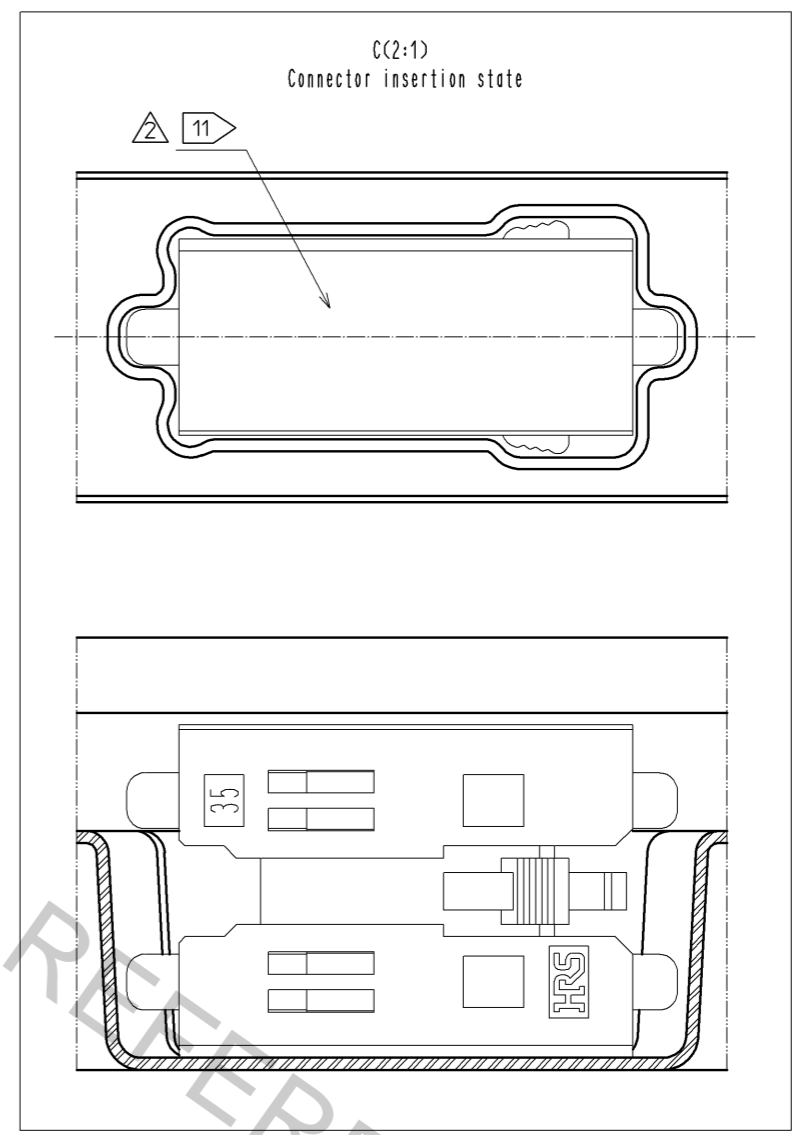
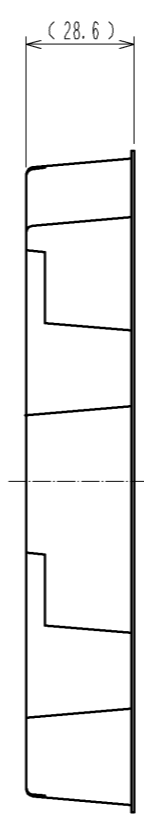
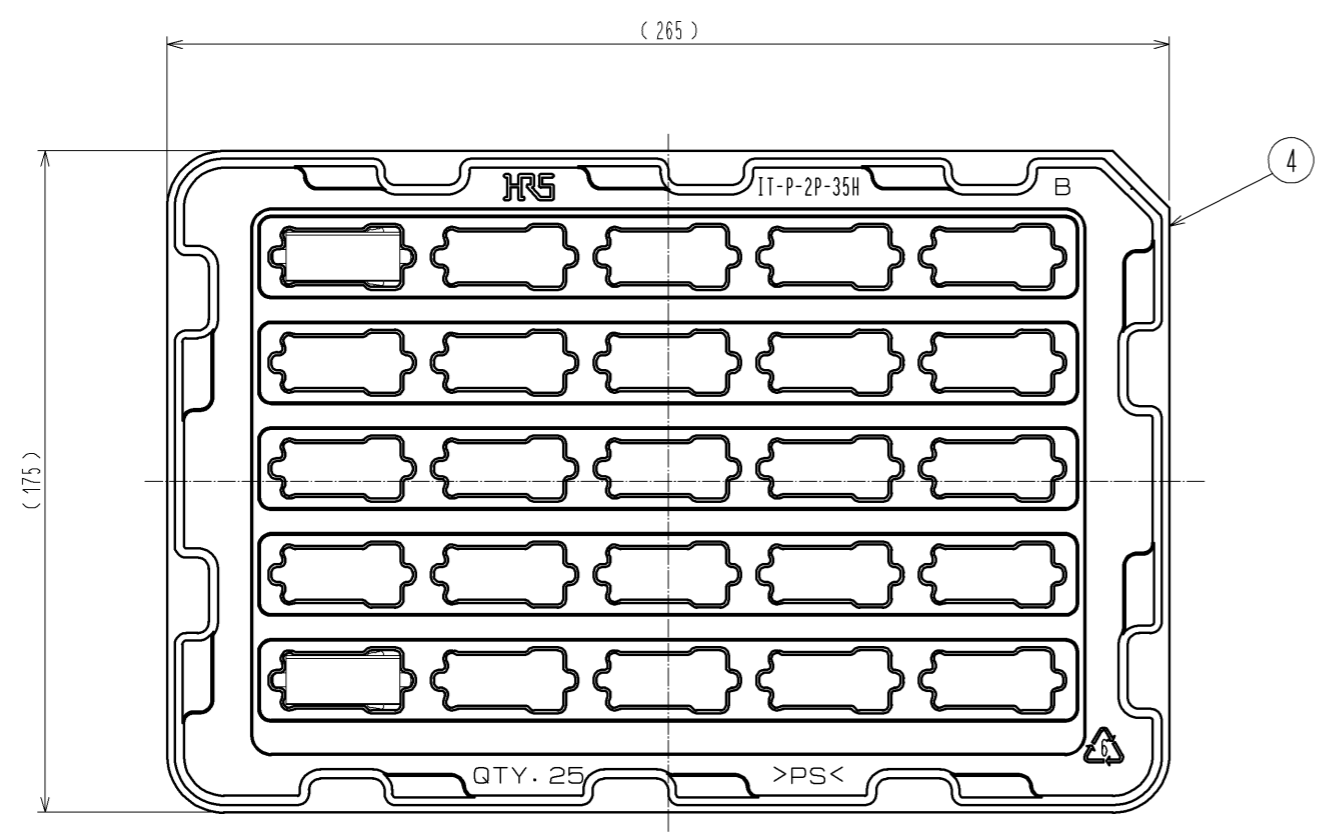



- Note.
- ① The lot number is marked in this area.
 - ② Stack height(Nominal)is shown.
 - ③ The dimensions in parentheses are for reference.
 - ④ Engageable receptacle is defined for each side of this product.
 - ⑤ Since this product is point symmetry, direction of mating does not have a rule.
 - ⑥ Manufacturing process could leave scratch and/or punch marks, but they have no effect on the product performance.
 - ⑦ Since silver plating is used for this product, if it is left in the atmosphere for a long time, plating may become drab.
 - ⑧ This product is RoHS compliant.
 - ⑨ This product is packaged in tray. (Max 25pcs/Tray)
 - ⑩ This part can accommodate the PCB board to board stacking height range of $35 \pm 1/-0.5$ mm (34.5mm to 36mm).

2	Brass	Over Plating : Silver $5.1 \mu\text{m}$	4	Polystyrene	(Tray B)
1	PBT	Black UL94V-0	3	Polystyrene	(Tray A)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-F-006732	DESIGNED TF. SUGAWARA
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 11.12.16	DRAWING NO. EDC3-339735-00		
		CHECED : KI. HIROKAWA 11.12.15	PART NO. IT-P-2P-35H		
		DESIGNED : KN. SHIBUYA 11.12.15	CODE NO. CL636-0602-2-00		
		DRAWN : KN. SHIBUYA 11.12.15	② 1/2		

Drawing For Packing (1:2)

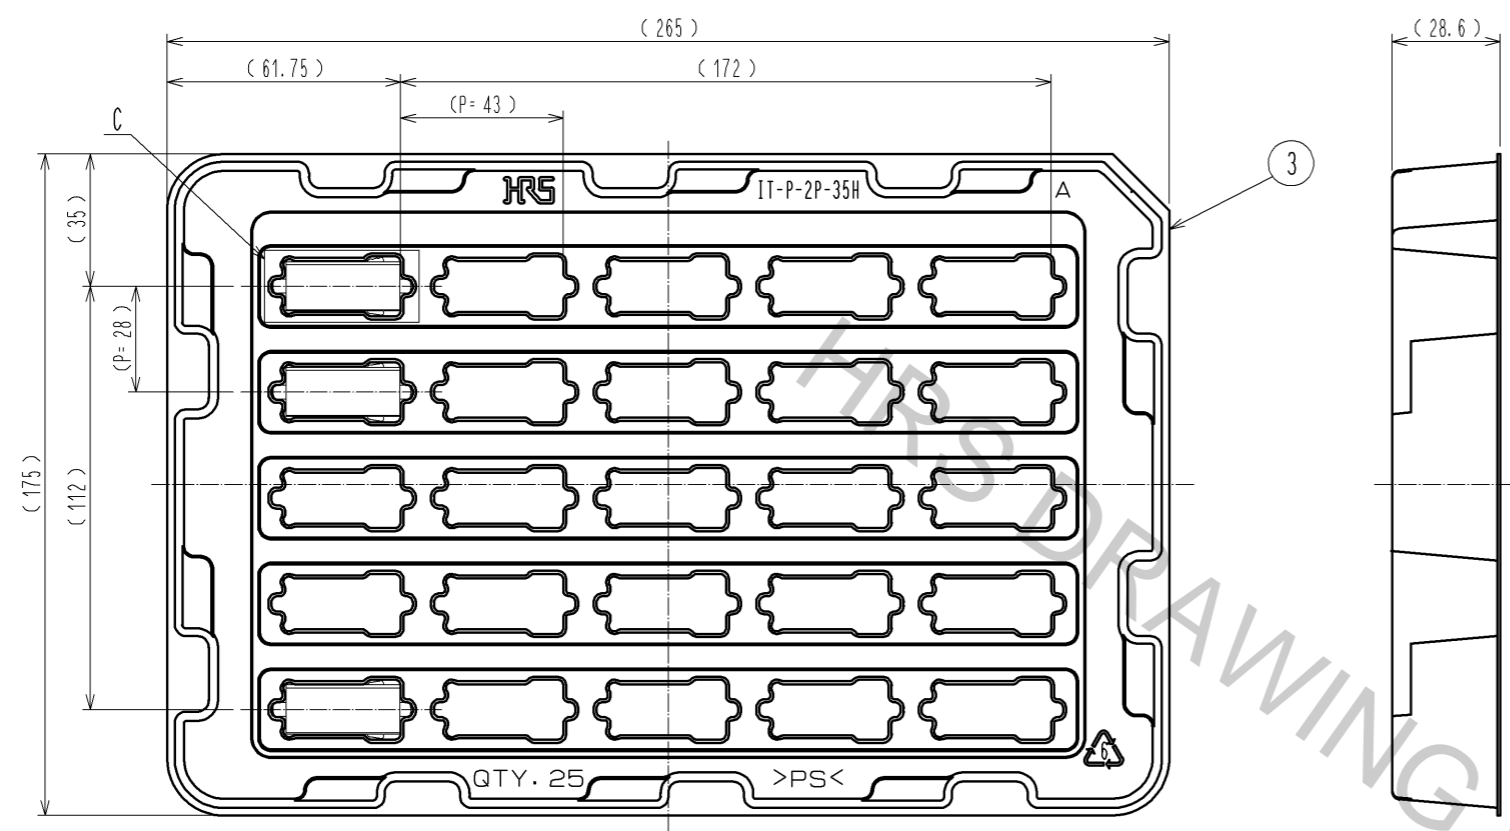

Drawing stacked (1:2)

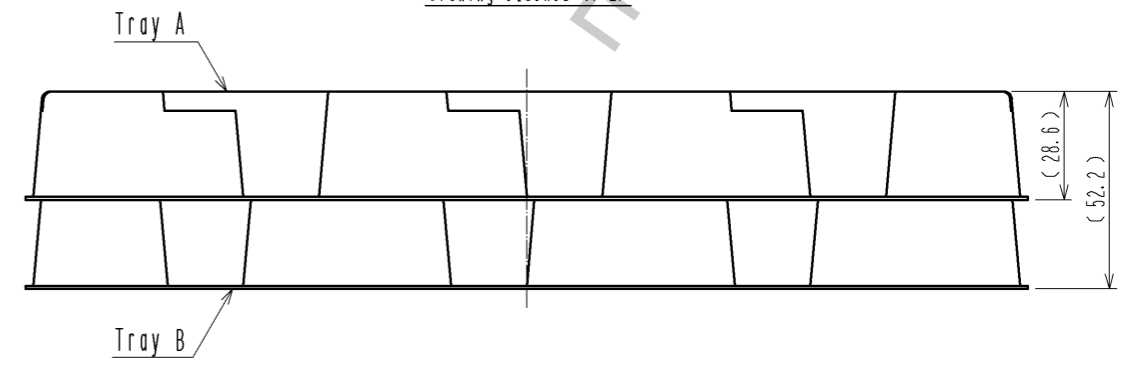

Note. 11 The connector is set in the tray in the direction shown here. The side with lot number can be either top side bottom side.

HRS	DRAWING NO.	EDC3-339735-00	2/2
	PART NO.	IT-P-2P-35H	
	CODE NO.	CL636-0602-2-00	