


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	NEW RELEASE	06JUN08	CP	LZ

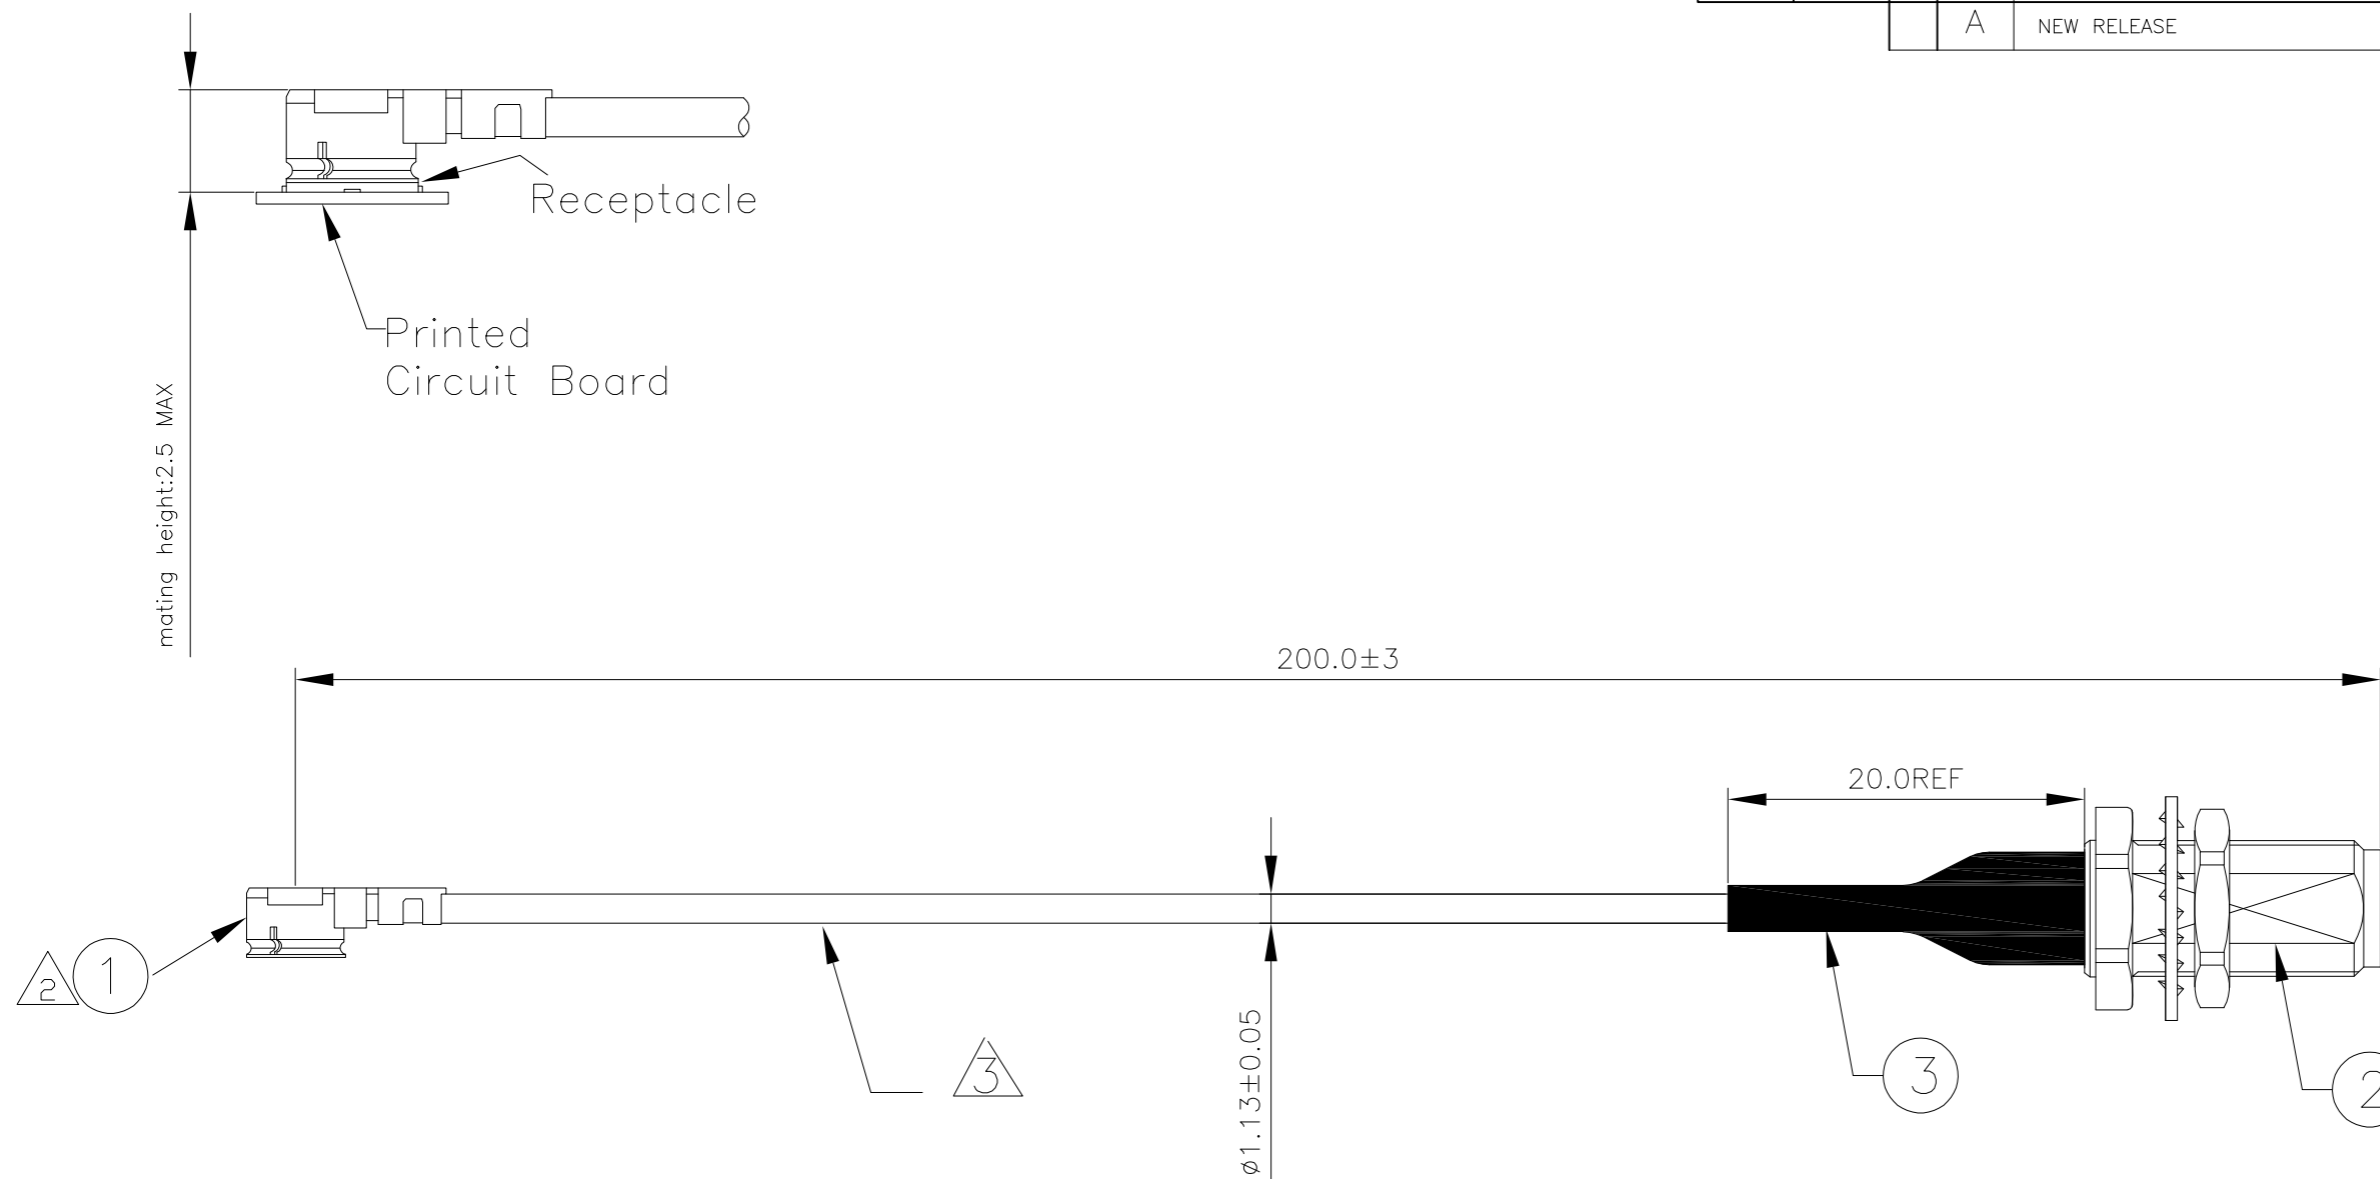

ORIENTATION OF FLATSIDE FOR UMMCC PLUG

- NOTES:
- CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPEN, SHORT AND CONTINUITY. HI-POT AT 150VDC FOR 100MS. INSULATION RESISTANCE: 50M OHMS MIN. CONTINUITY RESISTANCE: 2 OHMS MAX. FREQUENCY RANGE: DC-6GHz VSWR: 1.4:1 MAX. @ DC--3GHz 1.6:1 MAX @ 3GHz--6GHz
 - CONNECTOR: TYPE III U.FL
 - CABLE: 1.13mm OD, 50 OHMS FEP INSULATED COAX, BLACK JACKET
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

AR	MR	TUBING, BLK	3
1	PC	R/P SMA BHD JACK FOR 1.13MM	2
1	PC	UMCC PLUG ON 1.13MM OD 200MM	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Chen Ping 06JUN08	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK Eric Chen 06JUN08	NAME CABLE ASSEMBLY RF, UMMCC PLUG TO R/P SMA BHD JACK 1.13MM OD	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Lessie Zhang 06JUN08	PRODUCT SPEC -	
0 PLC ± -		APPLICATION SPEC -		
1 PLC ± -		SIZE A3		
2 PLC ± -		CAGE CODE 00779		
3 PLC ± -		DRAWING NO 2032445		
4 PLC ± -		RESTRICTED TO -		
ANGLES ± -		SCALE N.T.S.		
MATERIAL -		SHEET 1 OF 1		
FINISH -		REV A		
		CUSTOMER DRAWING		