


ALL DIMENSIONS ARE IN (mm)						
Part Number	Wire Size	Wire Class	Wire Strip Length	$l \pm 2.76$	$o \pm .50$	$i \pm .50$
SCMSX10-C	10 mm ²	5f & 6f	19.0	35.0	7.20	5.50
SCMSX16-C	16 mm ²	5f & 6f	26.0	49.0	9.10	6.90
SCMSX25-L	25 mm ²	5f & 6f	19.5	36.0	10.40	8.20
SCMSX35-L	35 mm ²	5f & 6f	30.0	57.0	12.70	9.80
SCMSX50-L	50 mm ²	5f & 6f	27.5	52.0	14.20	11.50
SCMSX70-L	70 mm ²	5f & 6f	28.5	54.0	17.40	13.50
SCMSX95-Q	95 mm ²	5f & 6f	30.0	57.0	19.40	15.20
SCMSX120-Q	120 mm ²	5f & 6f	30.0	57.0	21.00	16.50
SCMSX150-X	150 mm ²	5f & 6f	32.0	61.0	23.00	18.60
SCMSX185-X	185 mm ²	5f & 6f	37.5	72.0	26.00	20.80
SCMSX240-X	240 mm ²	5f & 6f	39.0	75.0	29.00	23.50
SCMSX300-5	300 mm ²	5f	49.0	95.0	33.00	26.20

- NOTES:
1. Material: High conductivity seamless copper tube.
 2. Plating: Parts are annealed and tin plated.
 3. WireType: Class 5 and 6 Flexible Stranded Copper Conductor per DIN VDE 0295, IEC 60228, and HD 383.
 4. UL Listed & CSA Certified Wire Connectors for applications up to 35kv, when crimped per instruction sheet included with Panduit packaging. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 5. UL & CSA Temperature Rating: 90°C



LISTED Wire Connector

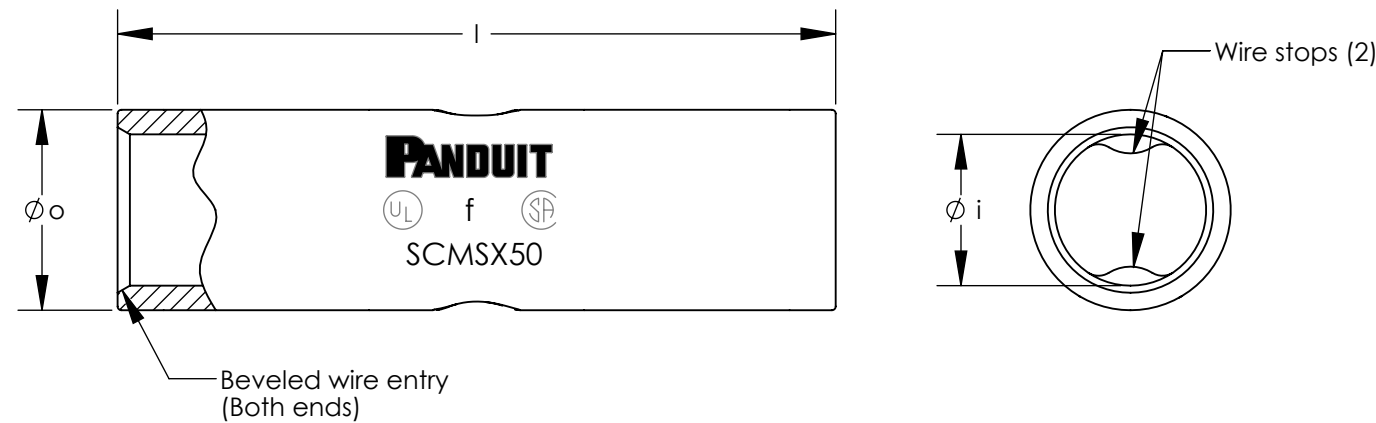

CERTIFIED

										PANDUIT CORP. TINLEY PARK, ILLINOIS METRIC FLEX SPLICES - SCMSX SERIES 10-300mm ² CUSTOMER DRAWING			
				DRAWN BY		MAT'L:		SCALE		DRAWING NO / CAD FILE		DWG	
				TLCO				NONE		10N014BE-NC		B	
00 11/12 TLCO TLCO				DRAWING RELEASED		10N014BE-NC RGB RGB		DATE 5/11		CHK'D TLCO		SIZE	
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP						