

Features

Regulated Converters

- 2:1 Wide Input Range
- 2kVDC/1 Second Isolation
- -40°C To +75°C Operating Temperature @ Full Load
- Industry Standard Pinout (SIP8)
- EN/UL62368 and UL60950 Certified, CB Report
- Low Cost

Description

The RSE is a low cost isolated, regulated and short-circuit protected DC/DC converter designed for industrial applications. A compact SIP8 case size, 2:1 input, 2kVDC isolation and a wide operating temperature range of -40°C to +75°C without derating makes the RSE series ideal for industrial, transport and general-purpose on-board 5V power supplies. Industrial Class A EMC levels can be met with a simple Pi-filter and the converters come with a three year warranty.

Selection Guide

Part Number	nom. Input Voltage [VDC]	Input Current @ full load [mA]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. ⁽¹⁾ [%]	max. Capacitive Load ⁽²⁾ [µF]
RSE-0505S/H2	4.5 - 9	526	5	400	76	6800
RSE-2405S/H2	18 - 36	103	5	400	80	6800

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient


Note2: Max. cap load is tested at nominal input and full resistive load

Specifications (measured @ ta= 25°C, nominal Vin, full load unless otherwise specified)

BASIC CHARACTERISTICS					
Parameter	Condition		Min.	Typ.	Max.
Internal Input Filter			capacitor		
Input Voltage Range	nom. Vin=	5VDC 24VDC	4.5VDC 18VDC	5VDC 24VDC	9VDC 36VDC
Maximum Reverse Voltage					0VDC
Input Surge Voltage	100ms max	nom. Vin=	5VDC 24VDC	15VDC 50VDC	
Quiescent Current	nom. Vin=		5VDC 24VDC	40mA 3mA	
Start-up time				500µs	
Rise time				450µs	
Hold-up time				10µs	
Internal Operating Frequency			130kHz		
Minimum Load			0%		
Output Ripple and Noise ⁽³⁾	20MHz BW, 0-100% load				75mVp-p
ON/OFF CTRL ⁽⁴⁾	DC-DC ON DC-DC OFF		Open or 0V < Vr < 0.8VDC 2V < Vr < 6VDC		
Input Current of CTRL Pin	5V VCTRL 3.3V VCTRL			15mA 10mA	
Standby Current				0.75mA	1.5mA
Notes: Note3: Measurements are made with a 0.1µF MLCC across output (low ESR) Note4: Please refer to „Application and Installation“ continued on next page					


RSE

2 Watt
SIP8
Single Output



UL62368-1 certified
C22.2 No. 62368-1-14 certified
UL60950 certified
C22.2 No. 60950-1-07 certified
IEC/EN62368-1 certified
EN55022/55024 compliant
CB Report


Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal V_{in} , full load unless otherwise specified)

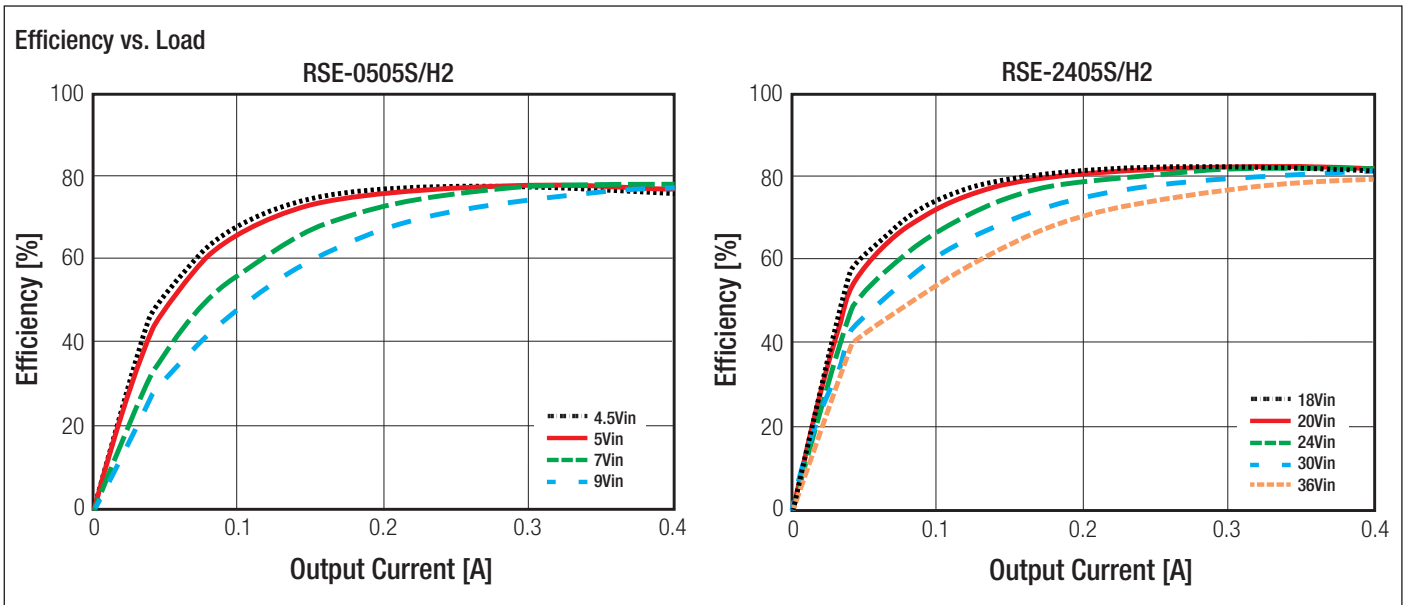

REGULATIONS

Parameter	Condition	Value
Output Accuracy	0-100% load	$\pm 2.0\%$ max.
Line Regulation	low line to high line, full load	$\pm 0.2\%$ max.
Load Regulation	0% to 100% load	$\pm 0.5\%$ max.

Accuracy vs. Load

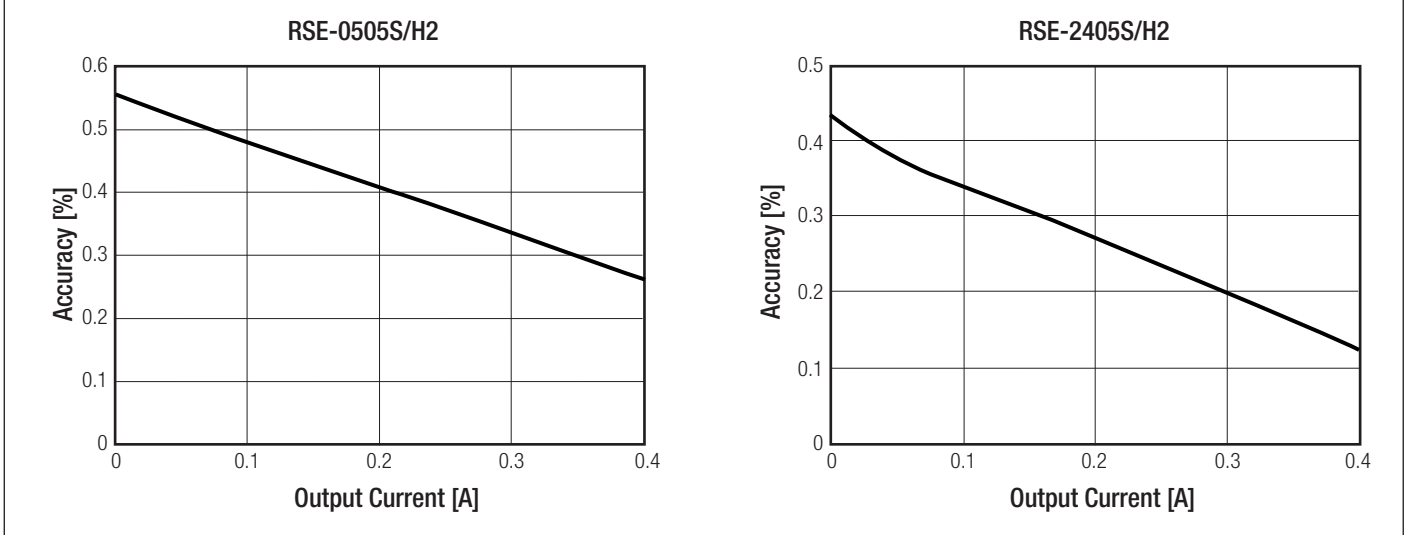


PROTECTIONS

Parameter	Type	Value
Short Circuit Protection (SCP)	below $100\text{m}\Omega$	continuous, auto recovery
Isolation Voltage ⁽⁵⁾	I/P to O/P tested for 1 second	2kVDC
Isolation Resistance		$1\text{G}\Omega$ min.
Isolation Capacitance		100pF max.
Insulation Grade		functional

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal V_{in} , full load unless otherwise specified)

Surge Protection Circuit according to EN61000-4-5, Criteria A

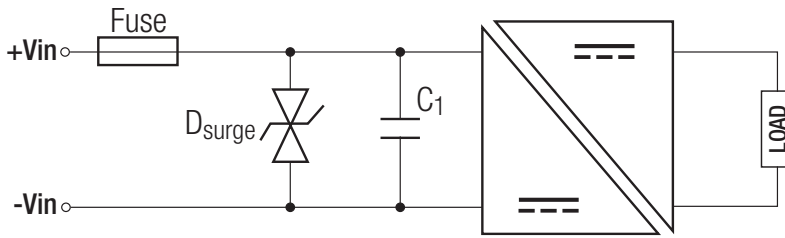

nom. V_{in}	TVS	C1
5VDC	P4SMAJ11A	N/A
24VDC	P4SMAJ36A	220 $\mu\text{F}/100\text{V}$

Notes:

Note5: For repeat HI-Pot testing, reduce the time and/or the test voltage


Note6: An input fuse is required if the mains supply is not over-current protected. Recommended fuse: T2A slow blow type

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	without derating (see graph)	-40°C to $+75^\circ\text{C}$
Maximum Case Temperature		$+105^\circ\text{C}$
Temperature Coefficient		$\pm 0.05\%/^\circ\text{C}$
Operating Altitude		5000m
Operating Humidity	non-condensing	5% - 95% RH max.
Pollution Degree		PD2
MTBF	according to MIL-HDBK-217F, G.B.	$+25^\circ\text{C}$ $+75^\circ\text{C}$ 2289 x 10^3 hours 781 x 10^3 hours
Vibration		MIL-STD 202G

Derating Graph

(@ Chamber and natural convection 0.1m/s)

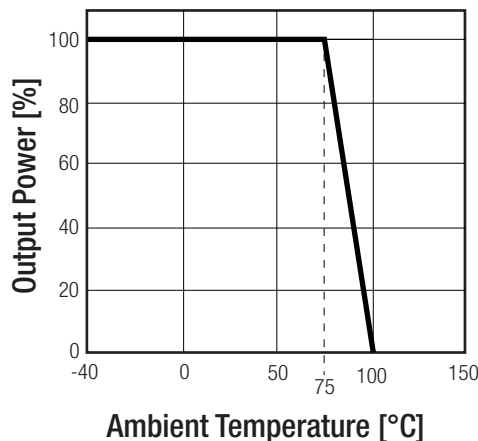

SAFETY AND CERTIFICATIONS


Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E224736-A48	UL60950-1, 2nd Edition, 2014 CSA C22.2 No. 60950-1-07, 2nd Ed. 2014
Audio/Video, information and communication technology equipment - Safety requirements		UL62368-1, 2nd Edition, 2014 CSA C22.2 Nr. 62368-1-14, 2nd Ed. 2014
Audio/Video, information and communication technology equipment - Safety requirements (CB Scheme)	L0339m37-CB-1-B1	IEC/EN62368-1, 2nd Edition, 2014
RoHS2		RoHS 2011/65/EU + AM2015/863

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal V_{in} , full load unless otherwise specified)


EMC Compliance	Conditions	Standard / Criterion
Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement	with external filter (see filter suggestion below)	EN55022, Class A EN55022, Class B
Information technology equipment - Immunity characteristics - Limits and methods of measurement		EN55024, 2015
ESD Electrostatic discharge immunity test	$\pm 8\text{kV}$ Air; $\pm 4\text{kV}$ Contact	IEC6100-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	IEC6100-4-3, Criteria A
Fast Transient and Burst Immunity	DC Power Port: $\pm 0.5\text{kV}$	IEC6100-4-4, Criteria A
Surge Immunity	DC Power Port: $\pm 0.5\text{kV}$	IEC6100-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	DC Power Port: 3V	IEC6100-4-6, Criteria A
Power Magnetic Field	50Hz, 1A/m	IEC6100-4-8, Criteria A

EMC Filtering Suggestions for EN55022 Class A

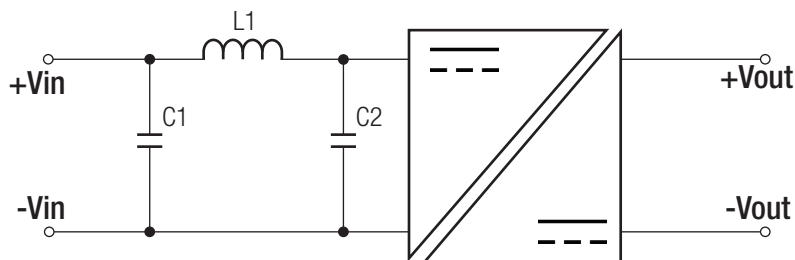

nom. V_{in}	C1	C2	L1
5VDC	22 μF /50V	22 μF /50V	3 μH Choke
24VDC	MLCC	MLCC	

EMC Filtering Suggestions for EN55022 Class B

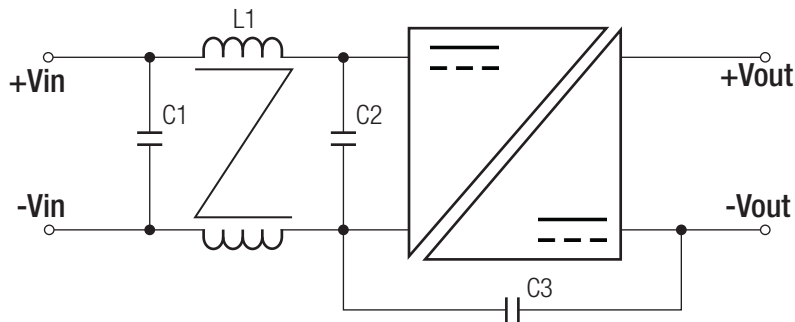



nom. V_{in}	C1	C2	C3	L1
5VDC	22 μF /50V	22 μF /50V	1000pF/3kV	0.45mH CMC
24VDC	MLCC	MLCC		

DIMENSION and PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	Case Potting PCB	non-conductive black plastic (UL94V-0) epoxy (UL94V-0) FR4 (UL94V-0)
Package Dimension (LxWxH)		21.8 x 9.2 x 11.1mm
Package Weight		4.7g typ.

continued on next page

Specifications (measured @ $t_a = 25^\circ\text{C}$, nominal V_{in} , full load unless otherwise specified)

Dimension Drawing (mm)

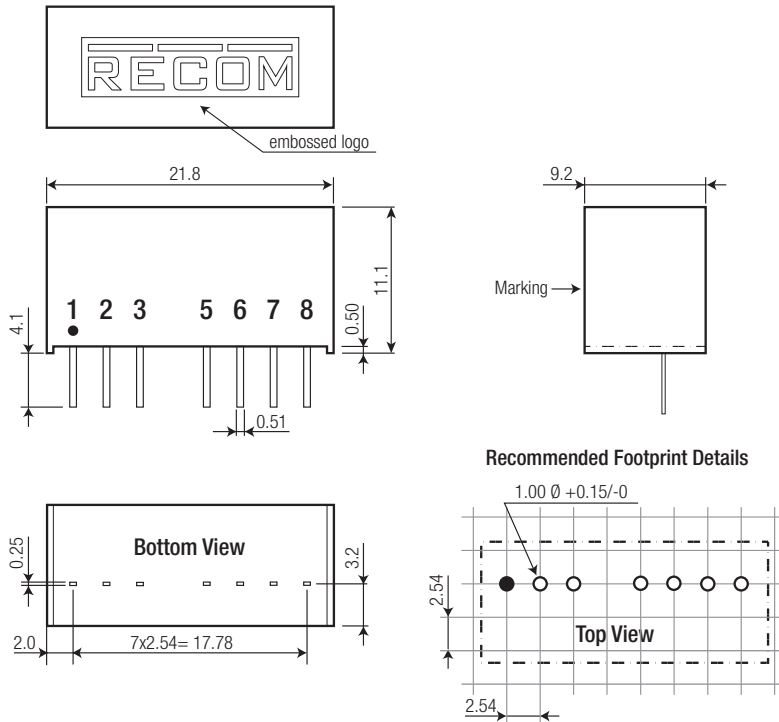

Pin Connection

Pin #	Single
1	-Vin
2	+Vin
3	CTRL
5	NC
6	+Vout
7	-Vout
8	NC

NC= no connection


Tolerance: xx.x= $\pm 0.5\text{mm}$

xx.xx= $\pm 0.25\text{mm}$

Pin dimension: $\pm 0.1\text{mm}$

INSTALLATION and APPLICATION

ON/OFF CTRL Circuit

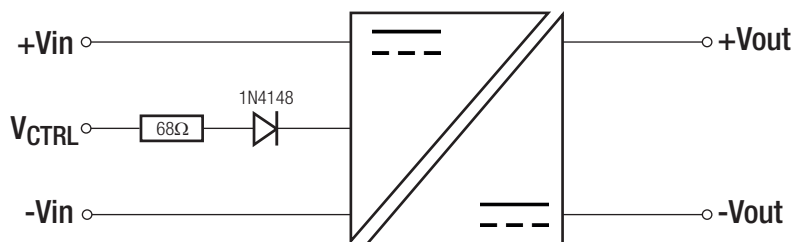

DC-DC ON: $0V < V_r < 0.8V_{DC}$
 DC-DC OFF: $2V < V_r < 6V_{DC}$

continued on next page

PACKAGING INFORMATION

Packaging Dimension (LxWxH)	tube	520.0 x 11.2 x 18.2mm
Packaging Quantity		22pcs
Storage Temperature Range		-55°C to $+125^\circ\text{C}$
Storage Humidity		5% - 95% RH max.

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.