


SACC-M 8FS-4PCON

Order No.: 1506781

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506781>Sensor/actuator connector, female, straight, 4-pos., M8, Piercecon[®],
metal knurl, cable diameter max. 5 mm**Commercial data**

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 892708 |
| sales group | D121 |
| Pack | 1 pcs. |
| Customs tariff | 85366990 |
| Catalog page information | Page 41 (PC-2009) |

Product notesWEEE/RoHS-compliant since:
03/10/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

| | |
|-----------------------|--------|
| Rated current at 40°C | 4 A |
| Rated voltage | 30 V |
| Number of positions | 4 |
| Volume resistance | ≤ 3 mΩ |

| | |
|---------------------------------|--|
| Insulation resistance | ≥ 100 MΩ |
| Ambient temperature (operation) | -25 °C ... 90 °C (Male connector / female connector) |

General characteristics

| | |
|--|------------------------------|
| Standards/regulations | M8 connector IEC 61076-2-104 |
| Coding | A - standard |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP68 |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA 66 |
| Material of grip body | PA 66 |
| Material, knurls | Nickel-plated brass |
| Sealing material | NBR |
| Type of connection | Piercecon® |
| Conductor cross section stranded min. | 0.14 mm ² |
| Conductor cross section stranded max. | 0.38 mm ² |
| Conductor cross section AWG/kcmil min. | 22 |
| Conductor cross section AWG/kcmil max | 26 |
| External cable diameter | 3 mm ... 5 mm |
| Status display | No |


Certificates / Approvals



Certification GOST

Diagrams/Drawings

Functional drawing

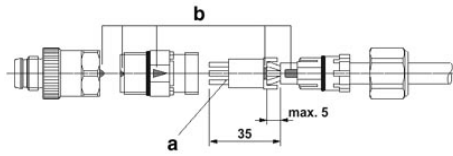


Assembly steps for M8 plug connector with Piercecon® connection

a = Cut flush

b = Coding


Strip the conductor by approx. 35 mm and slide on the union nut and cable clamp type cage. Without stripping the insulation of the individual cores, guide them into the corresponding chamber of the elastic core clamping and cut them off flush on the contact side. The coding marks must be flush when mounted.

Dimensioned drawing

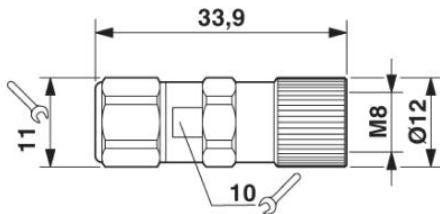

Socket M8 x 1, straight

Schematic diagram

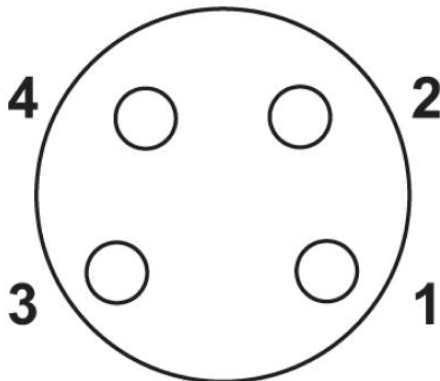

Pin assignment M8 socket, 4-pos., view female side

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;