

# CGJ6L4X7T2H104K160AA

TDK Item Description : CGJ6L4X7T2H104KT\*\*\*



## Application & Main Feature

High Reliability Grade ( Mid Voltage (100 to 630V) )

## Series

CGJ6(3225) [EIA CC1210]



## Dimensions

L 3.20mm +/-0.4mm  
 W 2.50mm +/-0.3mm  
 T 1.60mm +/-0.2mm  
 B 0.20mm Min.  
 G

## Temperature Characteristic

X7T (-55 to 125 degC +22,-33%)

## Rated Voltage

2H (500Vdc)

## Capacitance

100nF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

2.5% Max.


## Insulation Resistance

5Gohm Min.


## AEC-Q200

Yes


## DC Bias Characteristic

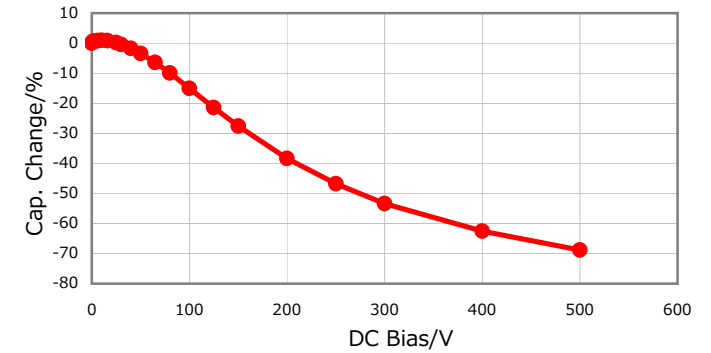


## |Z|, ESR vs. Freq. Characteristics

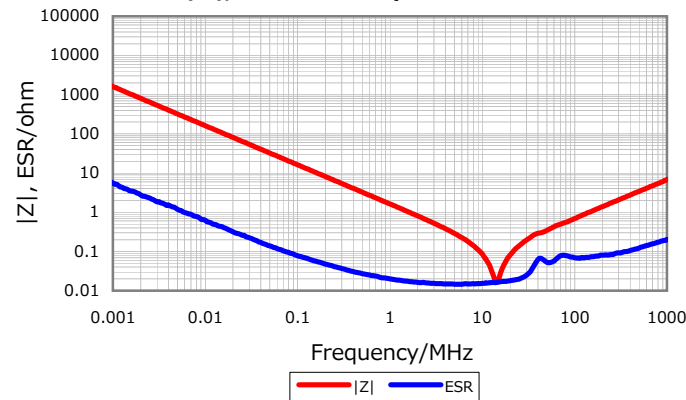


## Temperature Characteristics

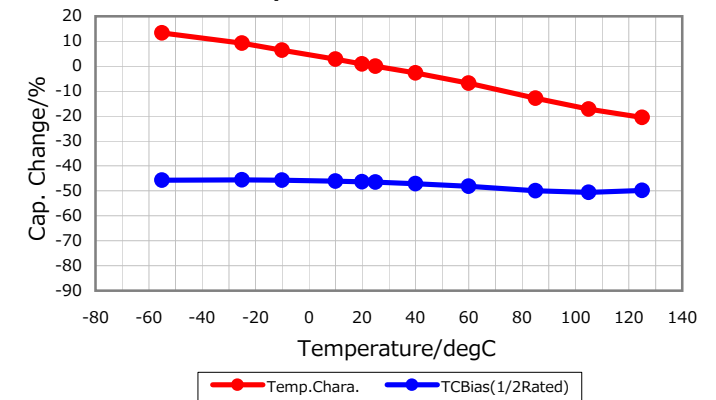

## Cap. vs. Freq. Characteristic

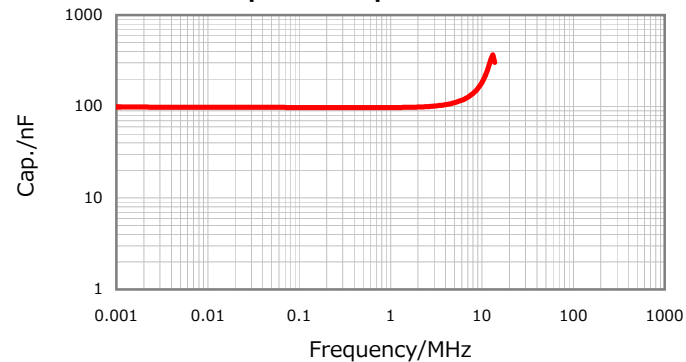

## Ripple Temperature Rise Characteristics

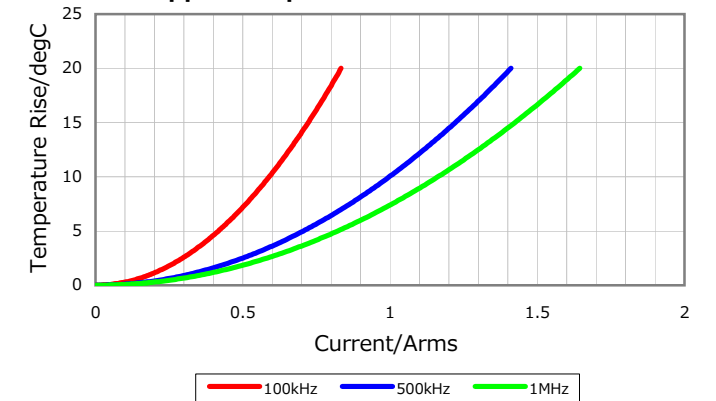

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016