




| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A | 53.4 |
| B | 32.5 |
| C | 1 3/4-18UNS-2A |
| D | 11 |
| E | 24.05 |
| F | 4 |
| G | 64 |
| H | 44.5 |
| I | 57 |
| K | M5 |

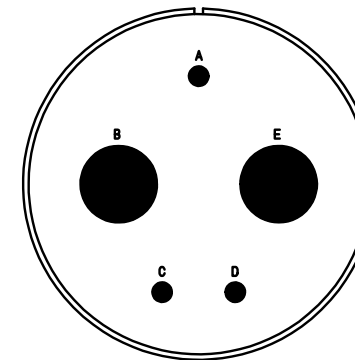

| NO. | BESCHREIBUNG / DESCRIPTION |
|-----|-----------------------------------------|
| 2 | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3 | DICHTKÖRPER / GROMMET |
| 4 | ENDRING / ENDRING |
| 6 | KONTAKTBUCHSE / CONTACT SOCKET |
| 8 | DOSENGEHÄUSE / SHELL |
| 14 | F-ENDGEHÄUSE / F-ENDBELL |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
 Specification and Dimensions subject to change
 Drawings illustrate normal insulator positioning

| Material Specification: | |
|-------------------------|-----------------------------------------------|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere |
| Contact Material: | Copper alloy |
| Contact Plating: | Hard silver |

all dimensions are in mm
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
 CUSTOMER



Engineered for life
 ITT CANNON GmbH
 D - 71384 Weinstadt/Germany

description CA3100F32-1S-B
 Wall mounting receptacle
 Endbell for flex tube
 Solder Cup / Socket / Layout: 32-1

© All rights reserved. Reproduction or issue to third in any form
 whatever is only permitted with written authorization of ITT Cannon



page 1/1
 revision 1488 30. Jul 18