Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	2	RE-F-06522	J.M	M.I	99.08.24						. .
2	1	RE-F-06759	J.M	M.I	00.01.12						. .
3	1	RE-F-06801	J.M	٢٠٠٢	٥٥.٠٤٢.١٦						. .

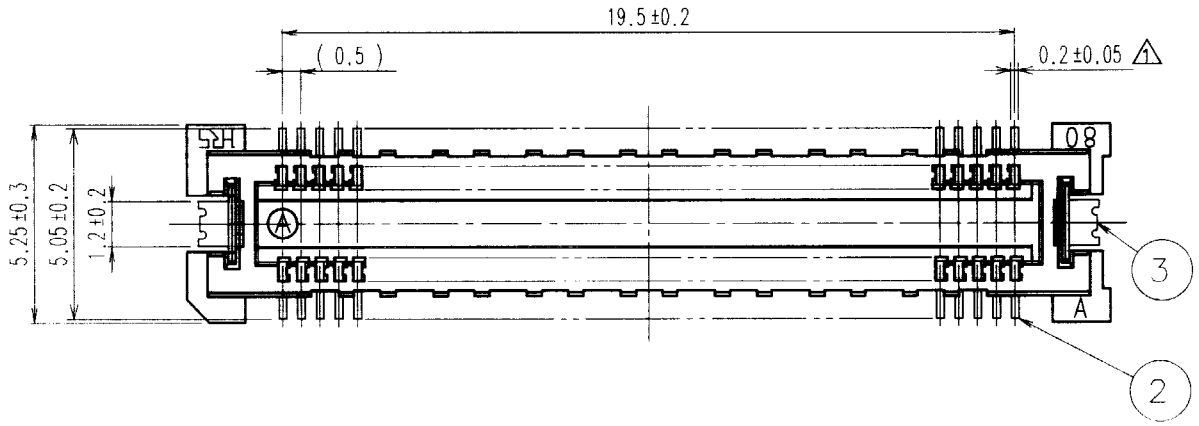

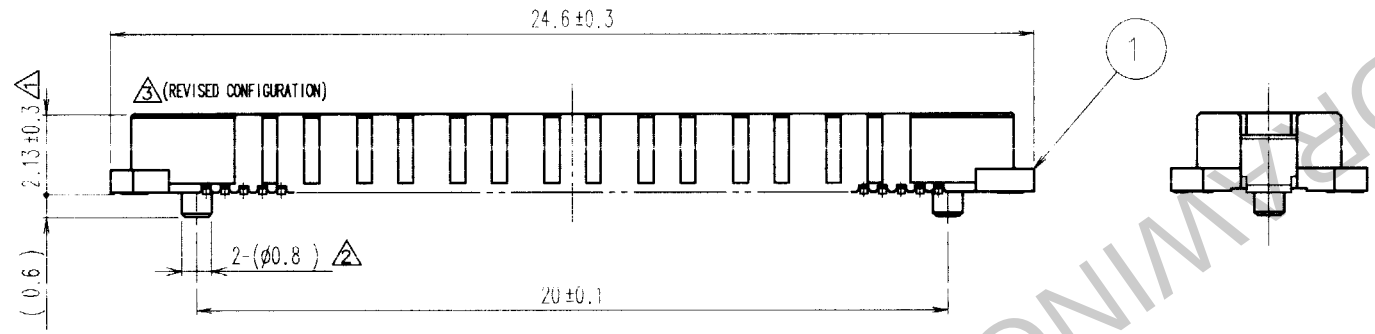

RECOMMENDED LAND PATTERN DIMENSION OF PCB

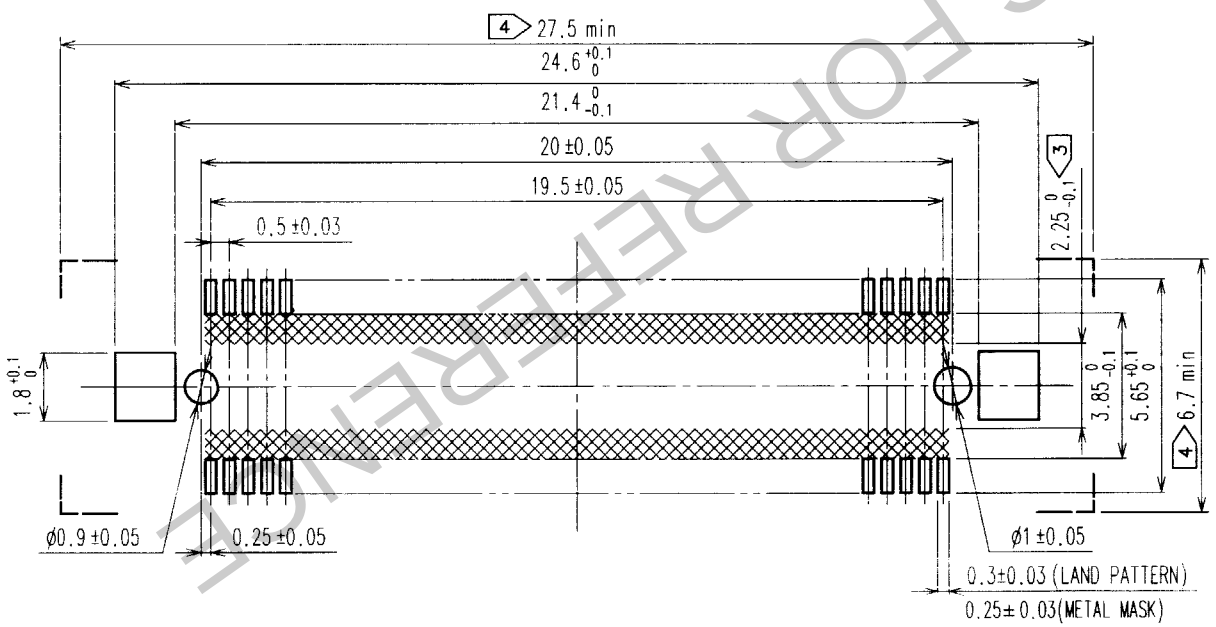

HRS DRAWING FOR REFERENCE

SIGNAL PORTION CROSS SECTION (10:1)

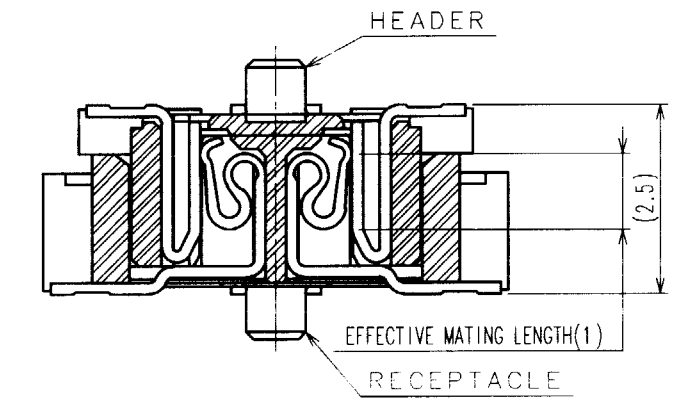

NOTES
1. SMT LEAD-COPLANARITY:0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED ▨ AREA.)
4. DO NOT MOUNT OTHER DEVICES ONTO ⊏ ⊐ AREA ,OR MATING PAIR CANNOT BE MATED.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	COPPER ALLOY	CONTACT AREA:GOLD(0.1μm) OVER NICKEL LEAD:GOLD FLASH OVER NICKEL			
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	J.Matsukawa 99.06.07	J.Matsukawa 99.06.07	M.Ishida 99.06.07	Y.Yoshimura 99.06.08	

SCALE 5 : 1 UNITS mm	DRAWING NO. EDC3-152439	PART NO. FX11A-80P-SV	
HRS HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0548-0	1/1

TO
PCK

FORM NO.229