

## HC-B 48-TFL-96/M1PG36G


Order No.: 1772162



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1772162>

Sleeve housing, for single locking latch, height 96 mm, with screw connection, 1x Pg36, straight cable entry

### Commercial data

GTIN (EAN)	
sales group	D002
Pack	1 pcs.
Customs tariff	85389099
Catalog page information	Page 506 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Note	For contact inserts HC-B48, DD216, M
Design	B48
Height	96 mm
Width	89 mm
Length	131.5 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Straight
Type of the screw connection	1x Pg36
Pg screw connection	With
Wrench size, union nut	47 mm
External cable diameter	24 mm ... 33 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

#### Certificates / Approvals




Certification

GOST

#### Diagrams/Drawings

Dimensioned drawing

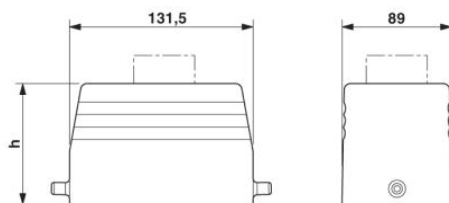

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;