


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

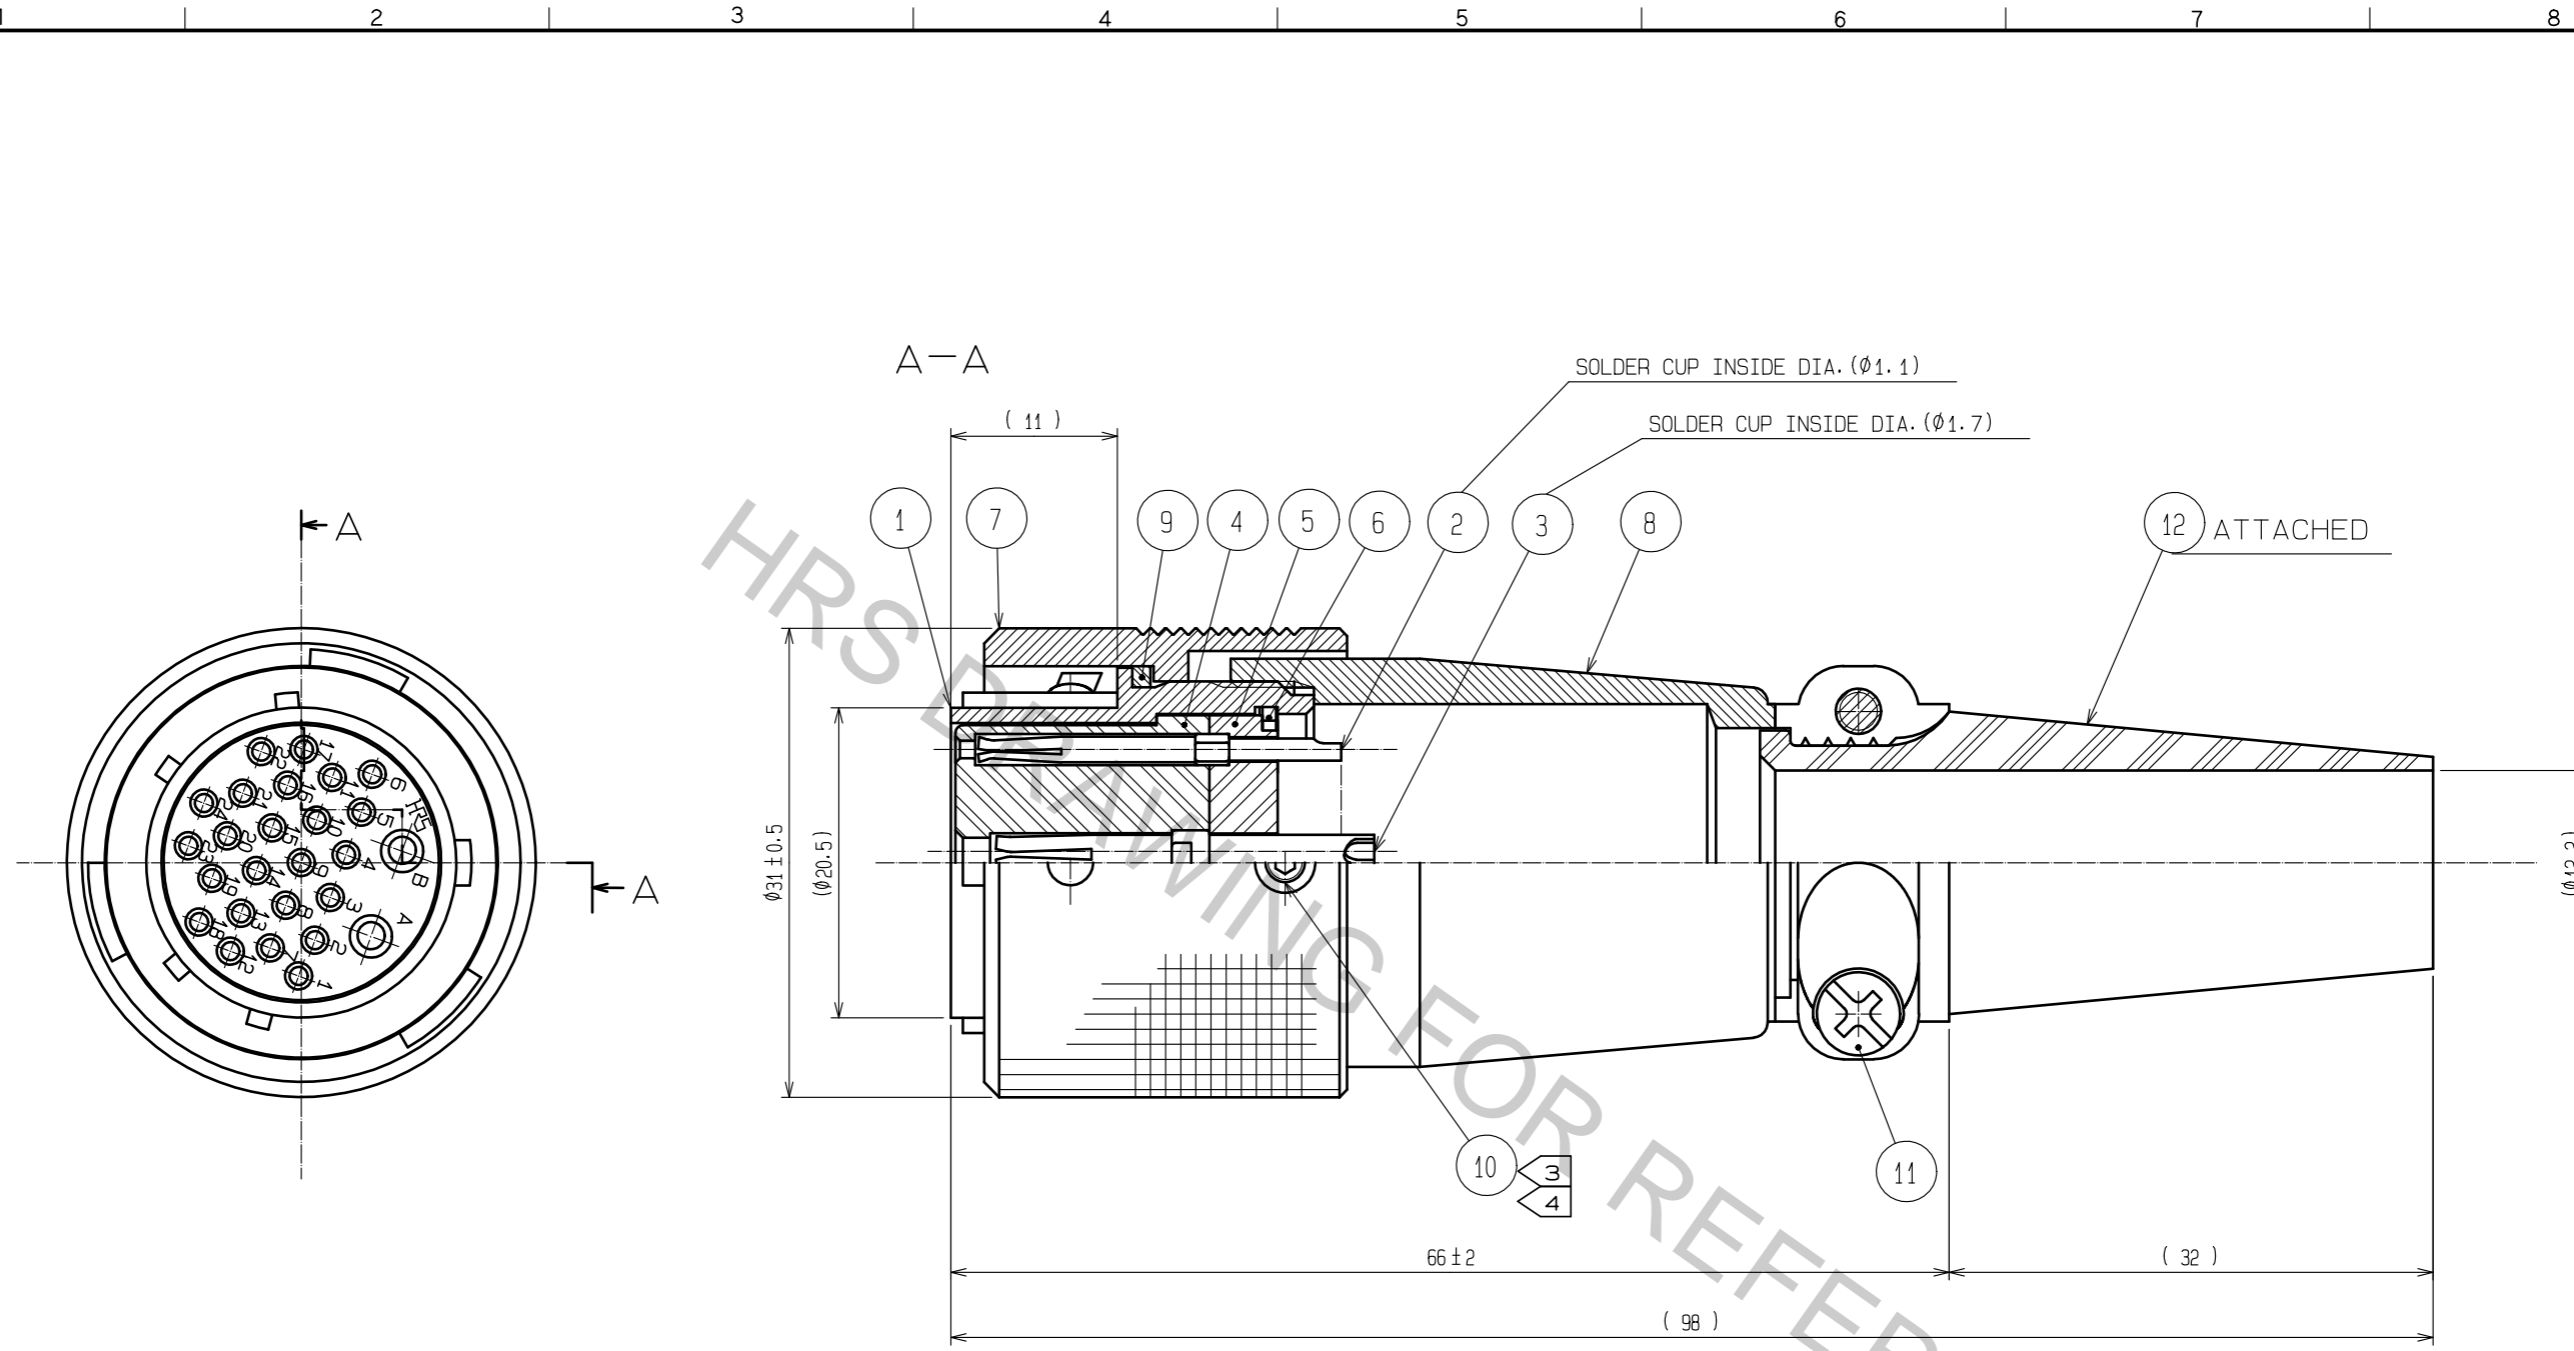

- NOTES 1 ROTATION EXAMPLES OF REF. ① AND ⑧ ARE SHOWN.
 2 AN EXAMPLE OF SOLDER CUP DIRECTON REF NO. ② AND ③ IS SHOWN.
 ③ THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩: 0.2 TO 0.3 N·m.
 ④ ACROSS FLATS OF HEXAGON HOLE OF REF. NO. ⑩ TO BE 1.27.

6	PHOSPHOR BRONZE	NICKEL PLATING	12	CR	(BLACK)
5	PHENOL-FORMAL DEHYDE	(BLACK) UL94V-0	11	BRASS	NICKEL PLATING JIS B 1111 PAN HEAD MACHINE SCREW M3X0.5X8
4	PHENOL-FORMAL DEHYDE	(BLACK) UL94V-0	10	STEEL	NICKEL PLATING JIS B 1177 HEXAGON SOCKET SET SCREW M2.6X0.45X2
3	COPPER ALLOY	SILVER PLATING 2#m min.	9	POLYACETAL	(WHITE)
2	COPPER ALLOY	SILVER PLATING 2#m min.	8	ALMINIUM ALLOY	MATTE FINISH NICKEL PLATED
1	ALMINIUM ALLOY	MATTE FINISH NICKEL PLATED	7	BRASS	MATTE FINISH NICKEL PLATED
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : HY. KOBAYASHI 18.03.12 CHECKED : HY. KOBAYASHI 18.03.12 DESIGNED : TH. KAMEYA 18.03.09 DRAWN : TH. KAMEYA 18.03.09	DRAWING NO. EDC-020920-31-00 PART NO. JRC21BP-26S(31) CODE NO. CL114-0267-1-31		