

## SUMMARY

### # Wires

Low	16
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male solder
IP rating	50
Cable Ø	3.20 - 5.20 mm
Matching parts	CKB.M16.GLLG
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 3.2 - 5.2 mm
Variant	

### Performance

Configuration	CAB.M16 : 16 Low V.
Insulator	
Rated Current	6 Amps

### Specifications

Test voltage (kV rms) Contact-contact:	1.5
Air clearance min. (mm) or Creepage distance min. (mm):	0.65

### Others


F ret (min):	150 N
--------------	-------

F ret (max): 250 N  
Steam sterilization: 20 times (with potting on rear connection)  
IP Rating: 50

---

## DRAWINGS

### Draws

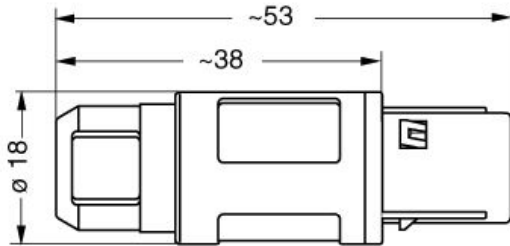

### Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables