
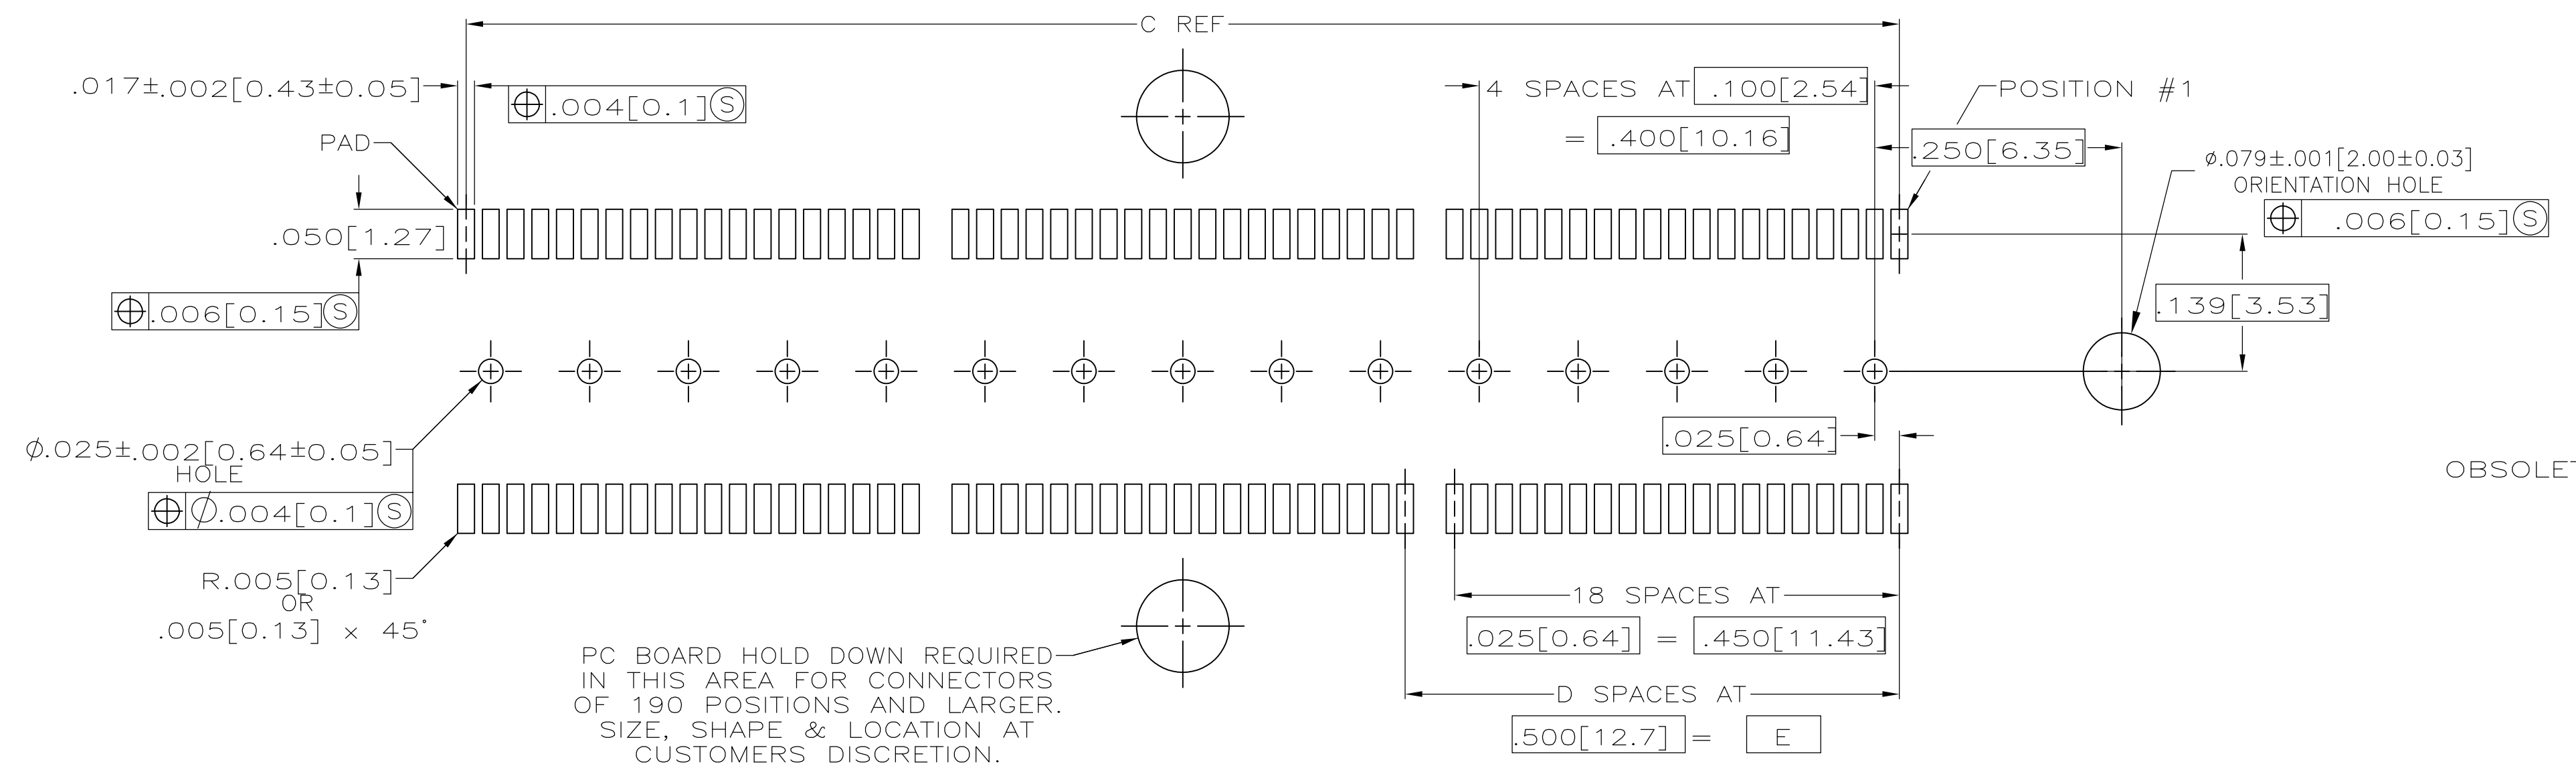


- $\triangle 1$  HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.  
CONTACTS: HIGH RELIABILITY COPPER ALLOY.  
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- $\triangle 2$  CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- $\triangle 3$  DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- $\triangle 4$  ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- $\triangle 5$  TOLERANCE NON-ACCUMULATIVE.

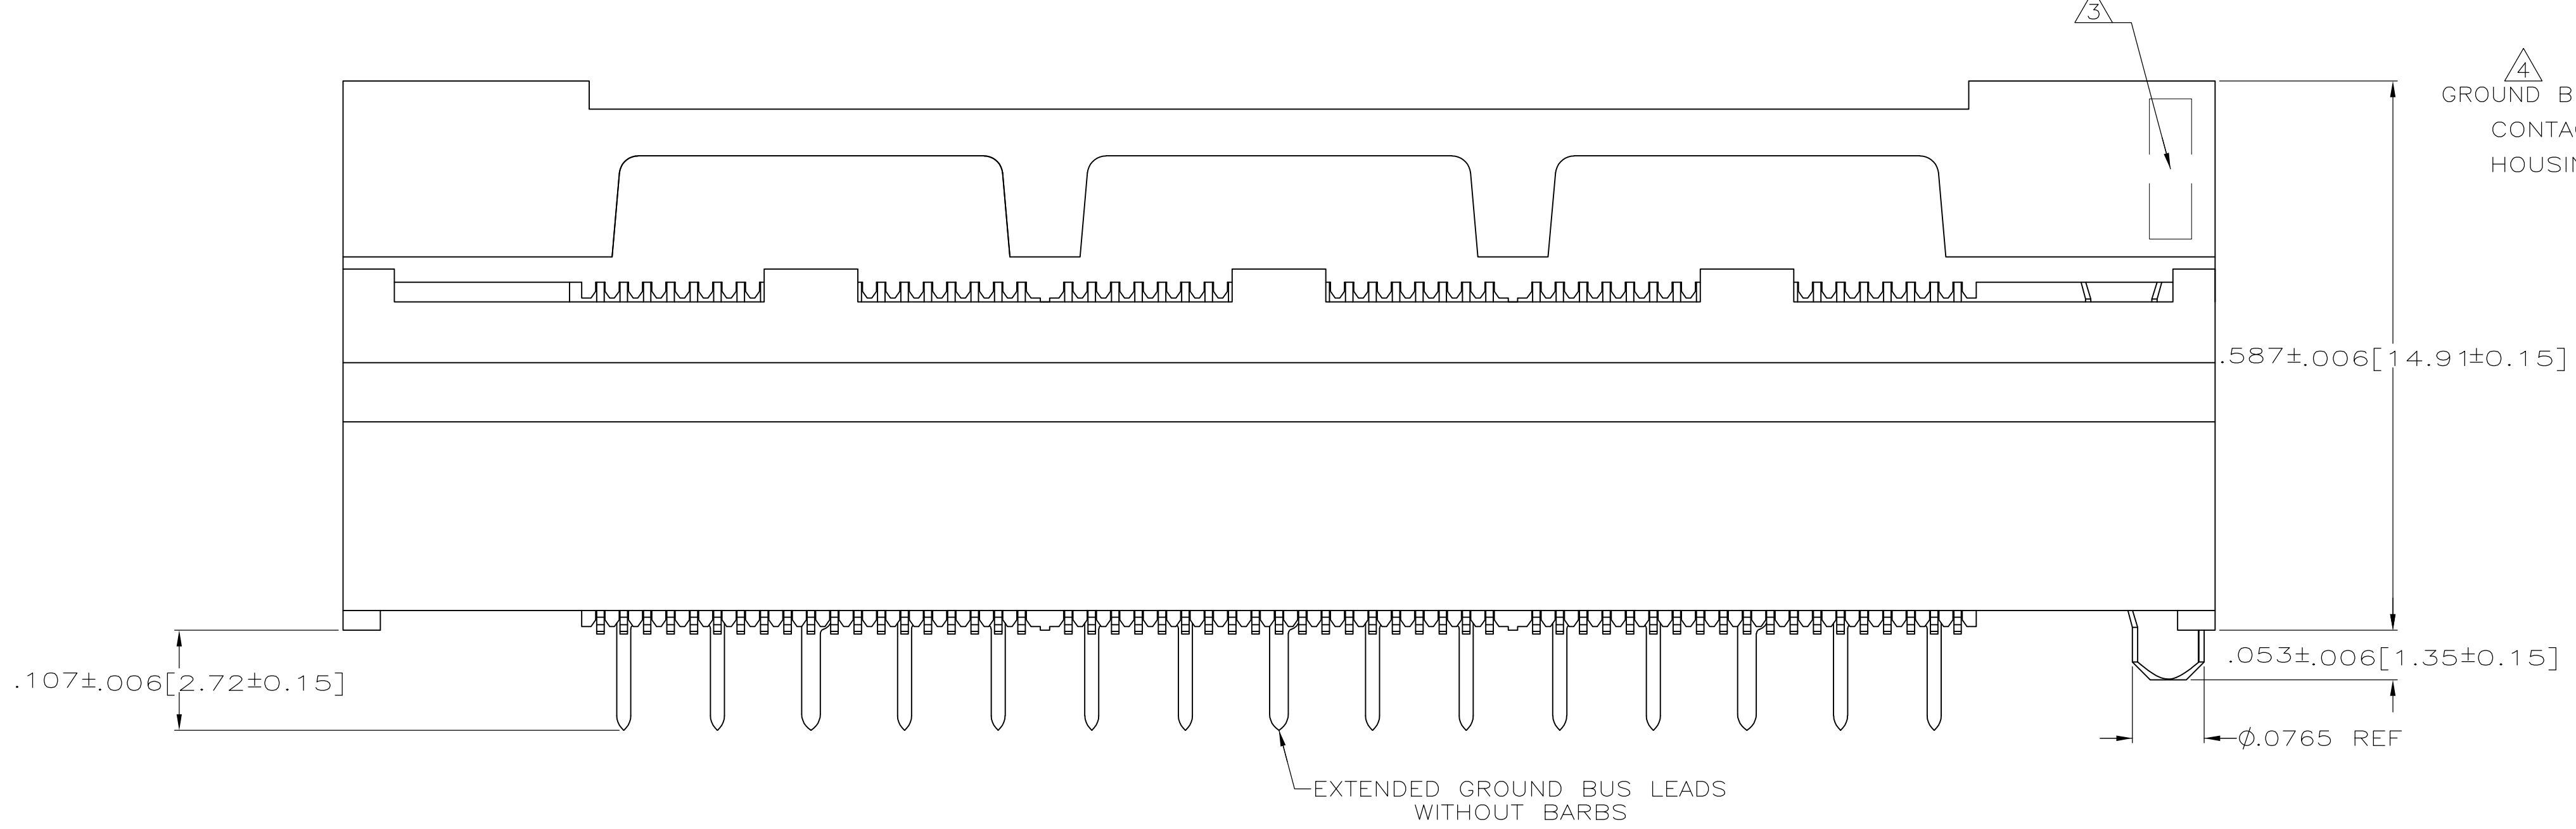

PC BOARD HOLD DOWN REQUIRED IN THIS AREA FOR CONNECTORS OF 190 POSITIONS AND LARGER. SIZE, SHAPE & LOCATION AT CUSTOMERS DISCRETION.

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

OBSOLETE

3.000 [ 76.2 ]	6	3.450 [ 87.63 ]	3.900 [ 99.06 ]	4.000 [ 101.6 ]	266	767095-7
2.500 [ 63.5 ]	5	2.950 [ 74.93 ]	3.400 [ 86.36 ]	3.500 [ 88.9 ]	228	767095-6
2.000 [ 50.8 ]	4	2.450 [ 62.23 ]	2.900 [ 73.66 ]	3.000 [ 76.2 ]	190	767095-5
1.500 [ 38.1 ]	3	1.950 [ 49.53 ]	2.400 [ 60.96 ]	2.500 [ 63.5 ]	152	767095-4
1.000 [ 25.4 ]	2	1.450 [ 36.83 ]	1.900 [ 48.26 ]	2.000 [ 50.8 ]	114	767095-3
.500 [ 12.7 ]	1	.950 [ 24.13 ]	1.400 [ 35.56 ]	1.500 [ 38.1 ]	76	767095-2
.000 [ 0 ]	0	.450 [ 11.43 ]	.900 [ 22.86 ]	1.000 [ 25.4 ]	38	767095-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES[mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: J GERACE 25FEB98	CHK: S STRICKLER 225FEB98	DATE: 25FEB98	NAME: AMONK
$\oplus$	0 PLC ± -	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
$\ominus$	1 PLC ± -	RECEPTACLE ASSEMBLY, .355 [ 9.02 ] VERTICAL, .025 [ 0.64 ] CENTER LINE, MICTOR			
$\ominus$	2 PLC ± -	SIZE: 108-1422			
$\ominus$	3 PLC ± .005 [ 0.13 ]	APPLICATION SPEC: 114-11004			
$\ominus$	4 PLC ± -	WEIGHT: -			
$\triangle$	ANGLES ± -	DRAWING NO: 767095			
MATERIAL: $\triangle$		FINISH: $\triangle$		CUSTOMER DRAWING	

SCALE: 8:1 SHEET 1 OF 1 REV G