

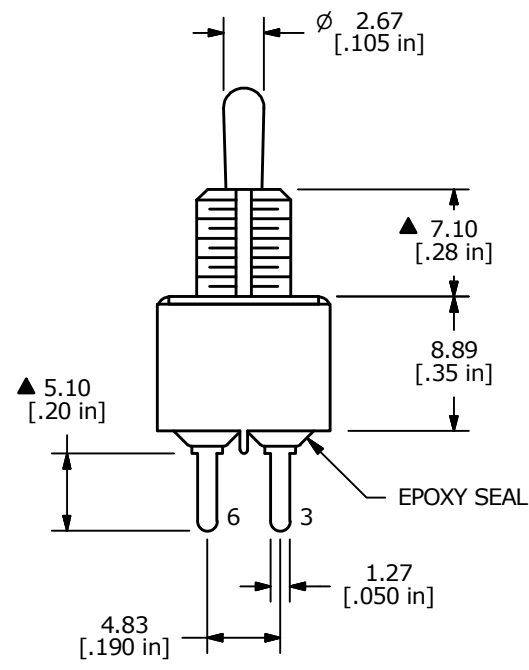


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3 5-6	OPEN	2-1 5-4

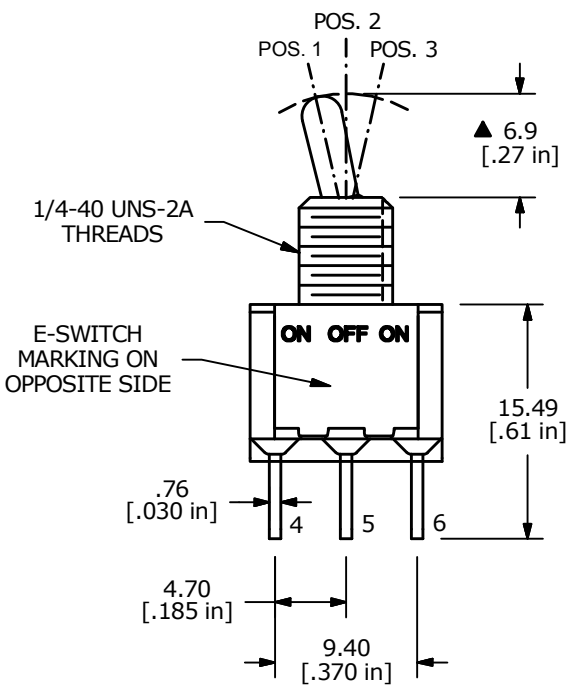

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. PLATING MATERIAL: SILVER
 5. RATING: 2 AMPS @250VAC
5 AMPS @120VAC or 28VDC
 6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
 8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. PACKAGE: 108 PARTS PER TRAY
 12. 2011/65/EU (ROHS) COMPLIANT
 13. HARDWARE TO BE SHIPPED BULK:
T100000 HEXNUT - QTY 2
T100011 LOCKWASHER - QTY 1
T100015 LOCKRING - QTY 1



B	22780	update print	3/28/17	MW
A	17965	RELEASE FOR PRODUCTION	2/13/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 100DP3T2B3M2QEH				
SCALE 2:1	DATE 2/13/2008	DR BLR	DWG ST123017	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED