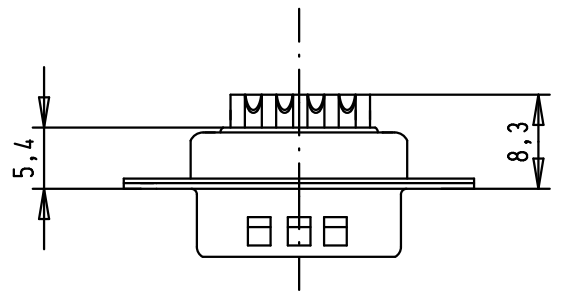


Solder bucket for AWG 20



SPECIFICATION

Performance level	PL2
Filter Type	C
Capacitance:	47pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30dB
1000	35dB



D
C
B
A

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	12/01/12	JB	
			Stand.			
36283	12/01/12	SD				
31897	17/05/04	AF	HARTING EURL			
31058	8-JUL-02	CV	F-95972 Paris			
Mod.	Dot.	Name				

D-Sub, male, straight, 9 Poles, with turned solder bucket and hole	Mo?Mstab/ Scale
	1.5:1
TB 09641217210	Blatt/ Page
	1 / 1
Sub.	