

## SUMMARY



Image is for illustrative purpose only

### # Wires

Low	19
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	2T
Termination type	Female solder
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	FGG.2T.319.CLAC50
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	EG*: Fixed receptacle, nut fixing
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

### Performance

Configuration	
Insulator	
Rated Current	5 Amps

### Specifications

Contact Type:	Solder
Vtest:	1250 V (DC)900 V (AC)


### Others

Temp (min / max): -55°C / +200°C

Humidity (max): <=95% [at 60 deg C /140 F]  
 Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Salt Spray Corrosion: >144 hr  
 Climatical Category: 50/175/21  
 Shielding (min): 75 dB (10 MHz)  
 Shielding (min): 40 dB (1 GHz)  
 IP Rating: 68

## DRAWINGS

### Draws

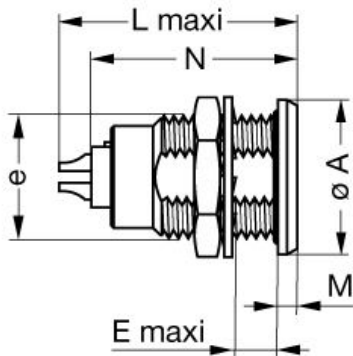

### Dimensions

	A	B	C	E	L	M	N	e
mm.	18.5	13.6	15.1	7.5	26.5	1.8	24.6	M15x1.0
in.	0,73	0,54	0,59	0,30	1,04	0,07	0,97	

## RECOMMENDED BY LEMO

### Tools

None

### Cables

CMN.19.T22.079QGZE	TPR (medical)	Grey	
CMN.19.T22.080PGCE	PVC	GREY	
CMN.19.T22.080PGZE		Grey	
CMN.19.T22.080PNCE	PVC	Black	

Property of LEMO SA. All rights reserved  
This document is not contractual

CMN.19.T22.080PNZE

