



FCIconnect.com

Copyright FCI

1

2 3

4

5

6

A

B

C


D

A



B

C

D

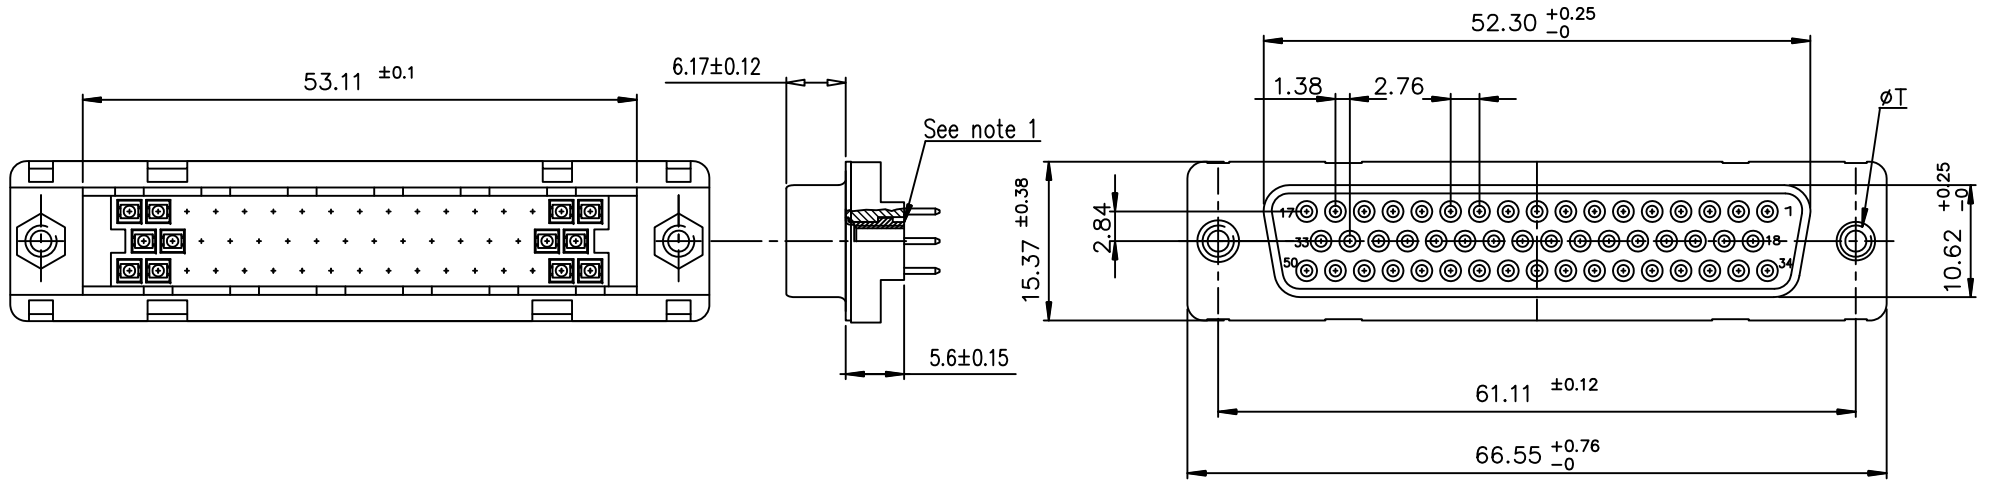

PC board drilling dimensions
(after plating – thickness: 1.60 to 3.20 mm)

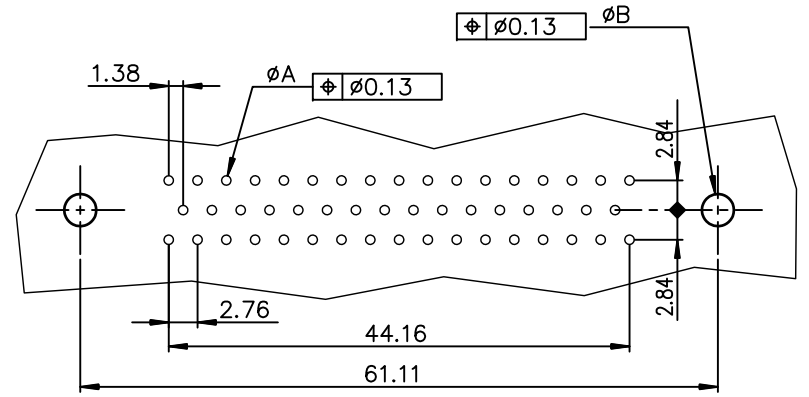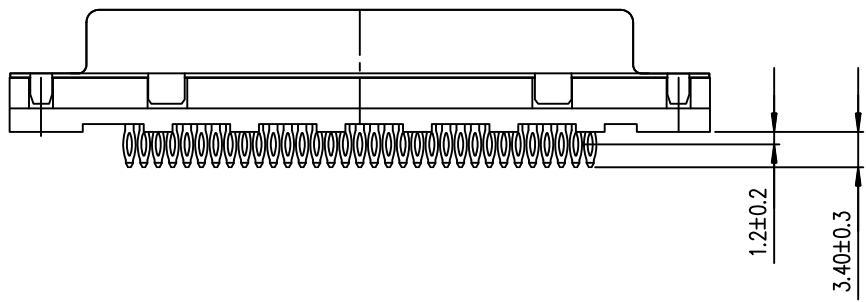

LEAD FREE PART NUMBER

PART NUMBER	
flash gold	D50S90C4P*00LF
0.76μ gold	D50S90C6P*00LF

X -> φT=UNC 4-40
L -> φT=M3

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 5.60±0.15 mm.

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
Ltr	ecn no	dr	date	tolerances unless otherwise specified		MM		title	
E	ELX-I-21256	AB	2015/07/14	angles	linear			FEMALE DELTA-D LOW PROFILE STRAIGHT PRESS FIT	
				0°±2'	.0±0.1 .00±0.1 .000±0.1	scale 2:1		dwg no	
				dr	PESSON	1997-07-26		sheet 1 of 1	
				engr	ALIAS BABU	2015/07/14		size	
				chr	MITHUN PAUL	2015/07/14		A3	
				appd	BIJU K PAUL	2015/07/14		type	
sheet index		revision	E					Product Customer Drawing	
		sheet	1						

