
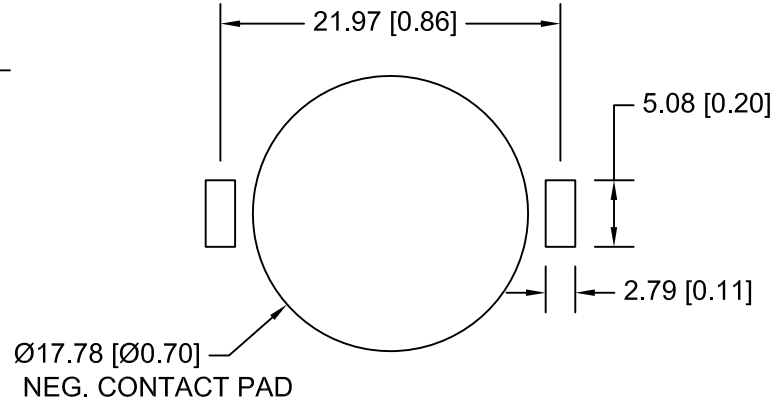



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

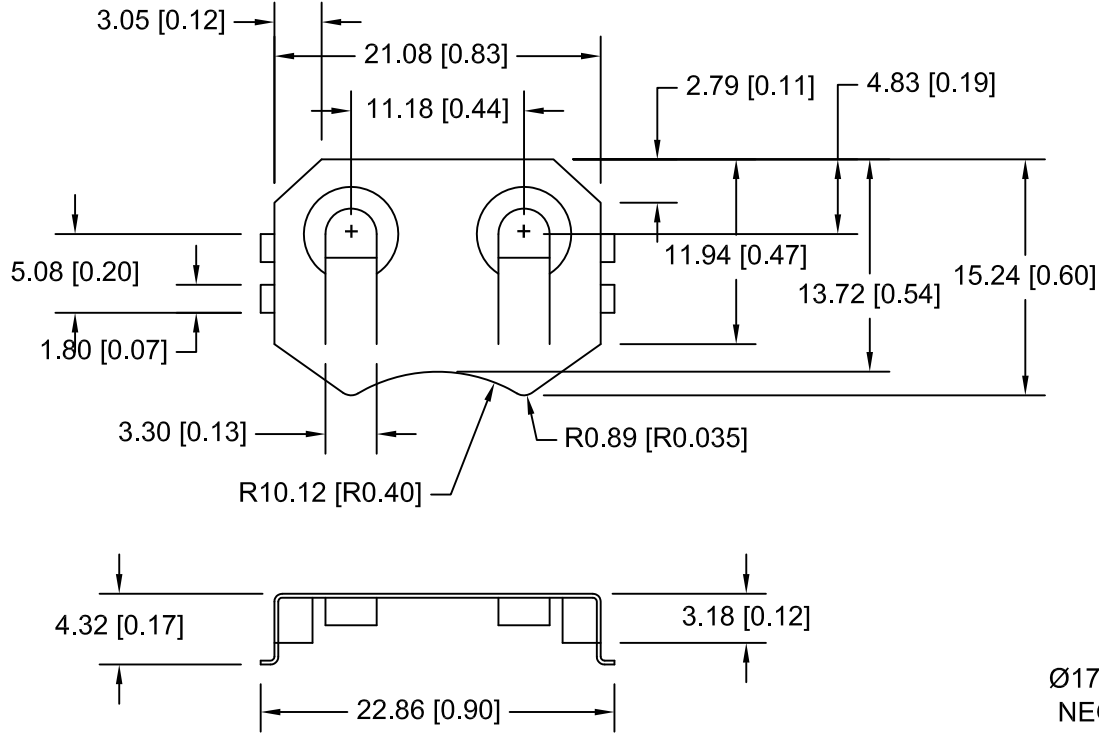

PCB LAYOUT

NOTES:

- 1. MATERIAL:
 - 0.25mm PHOSPHOR BRONZE, GOLD FLASH OVERALL, 1u-3u.
 - ROHS 2 COMPLIANT
 - TEMPERATURE RANGE: -40°C TO +270°C
 - * VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS
 - X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
 - * RESULT: NO DISLODGEEMENT OF THE CELL OR DAMAGE
 - NO DISCONTINUITY OVER 10 MICRO-SECONDS
 - * SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
 - 6 MILLISECONDS
 - 3 SHOCK PULSES EACH DIRECTION PER AXIS, TOTAL OF 18 PULSES
 - * RESULT: NO EVIDENCE OF PHYSICAL DAMAGE

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.1 (.004)	Title CR2032 BATTERY RETAINER		
Fractional ± .2 (.008)		Date 02/21/14	Drawing Number BK-912-G-TR
Angular ± 1°			