



Identification	Part No.	Drawing	Dimensions in mm
----------------	----------	---------	------------------

**Cable assembly D-Sub HD
78 pole, male**


Hood: shielded plastic hood
with side entry,
screw 4-40 UNC

Cable: 39 twisted pairs,
AWG 26, double shielded, PVC

Wiring: 1:1

- Length: L = 0.5 m
 L = 1.0 m
 L = 2.0 m
 L = 5.0 m
 L = 10.0 m
 L = 20.0 m

- 33 56 212 0050 028
 33 56 213 1000 002
 33 56 213 2000 016
 33 56 212 0500 029
 33 56 212 1000 030
 33 56 212 2000 031

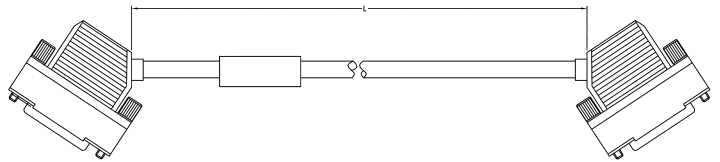

**Cable assembly D-Sub HD
44 pole, male**


Hood: shielded plastic hood
with side entry,
screw 4-40 UNC

Cable: 22 twisted pairs,
AWG 26, double shielded, PVC

Wiring: 1:1

- Length: L = 0.5 m
 L = 1.0 m
 L = 1.5 m
 L = 2.0 m
 L = 5.0 m
 L = 10.0 m

- 33 56 213 0500 023
 33 56 213 1000 024
 33 56 213 1500 022
 33 56 213 2000 025
 33 56 213 5000 026
 33 56 212 1000 027

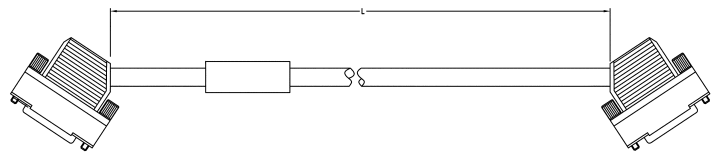

**Cable assembly D-Sub HD
44 pole, male**

Hood: metal hood with top
entry, screw 4-40 UNC

Cable: 24 twisted pairs,
AWG 26, double shielded, PVC

Wiring: 1:1

- Length: L = 0.5 m
 L = 1.0 m
 L = 5.0 m
 L = 10.0 m
 L = 20.0 m

- 33 56 212 0050 032
 33 56 212 0100 033
 33 56 212 0500 034
 33 56 212 1000 035
 33 56 212 2000 036

