


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH ±.3" [7]
MRT1S-C4	100	1" [25]	1.8" [45]	9.0" (229)
MRT2S-C4	100	2" [51]	2.8" [71]	12.2" (310)
MRT4S-C4	100	4" [102]	4.8" [122]	18.5" (470)
MRT6S-C4	100	6" [152]	6.8" [172]	24.8" (630)

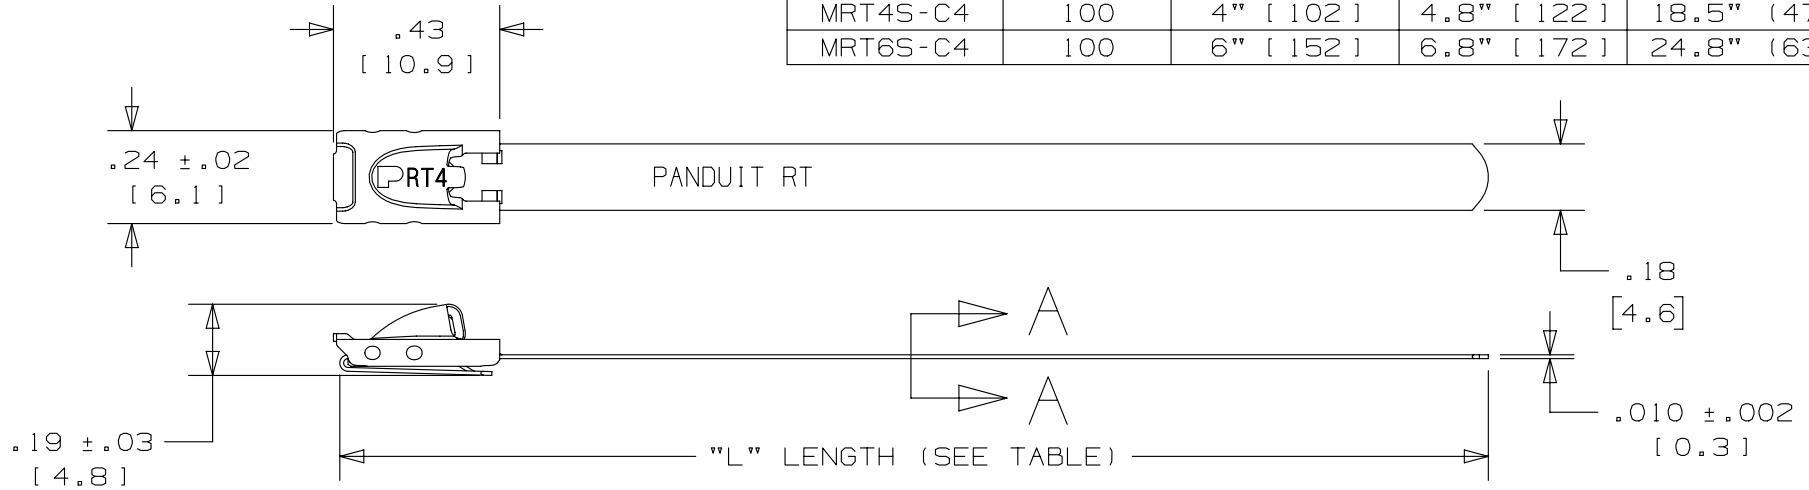

NOTES:

- APPLICATION TOOLS - MTRTLS & PTRT
- MINIMUM LOOP TENSILE STRENGTH - 180 lbs. (800 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
- TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
- MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A
SCALE 8:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10A	4/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
09A	3/12	JAMB	MIM	RGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----

TITLE		METAL TIE - STANDARD SERIES RETAINED TENSION	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41243BS/10	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			
DRAWN BY		DATE	
CHK		SCALE	
THIRD ANGLE PROJECTION		DRAWING NUMBER: N41243BS_DC	
SHT 1 OF 1			SIZE A