


used for:

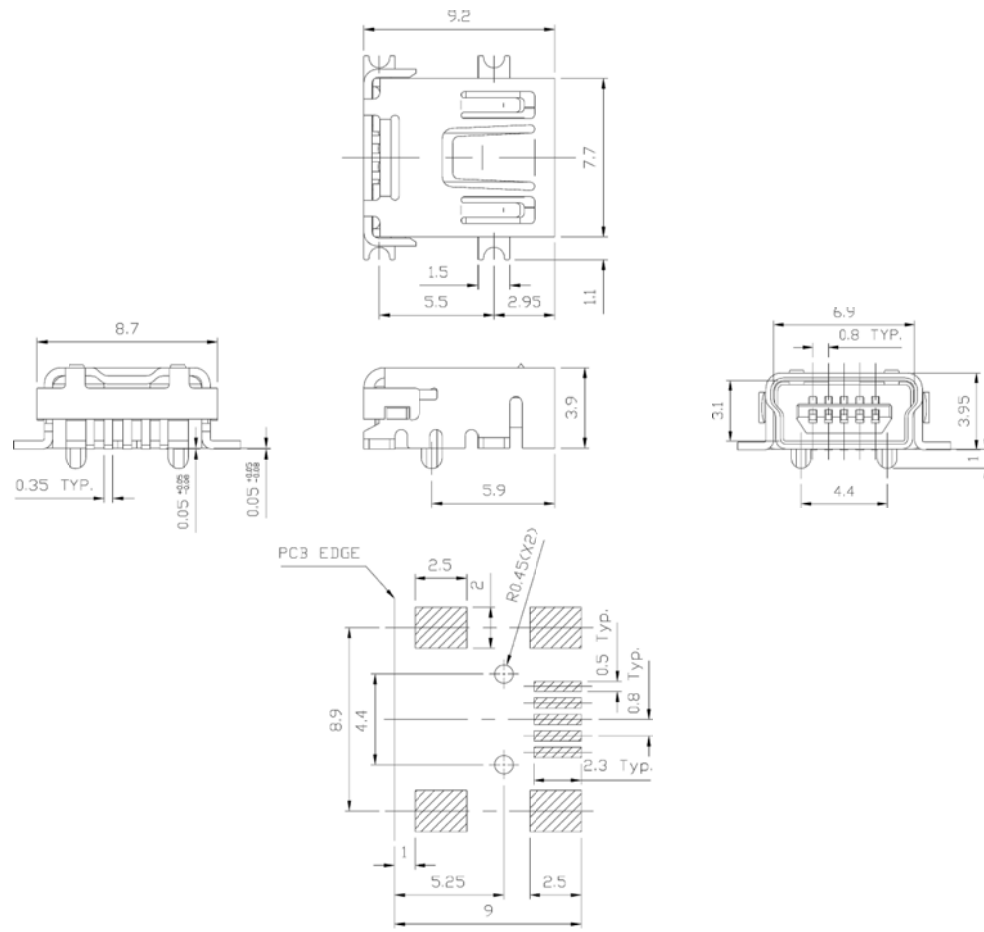

**NOTES:  
SPECIFICATIONS**

**Materials**

Insulator: High Temperature Thermoplastic, Glass Filled, UL 94V-0 Rated

Contact: Copper Alloy  
30µ Gold Plated on Mating Area

Shell: Copper Alloy  
Half-Brigh Tin Plated Over Copper

**Electrical**

Insulation Resistance: 1000 Megohms Minimum  
Contact Resistance: 30 Milliohms Maximum Initial  
Dielectric Withstanding Voltage: 500V AC for one minute  
Current: 1.0 Ampere Maximum Per Contact At 30°C T-Rise  
Voltage: 30V AC (rms)  
Temperature: -55°C ~ 85°C

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION. DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION Brampton, Ontario			tolerance unless otherwise specified Decimal: .xxx Angles: °		scale:
2005	date	name	Dim. in mm	material: SEE NOTES	
draw.	March. 14	Vincent Ke		title: mini USB Connector 5 pins female PCB R/A SMT	
appd.				drawing no.: AutoCAD 2004	
norm				DIN A3 sheet	
d-old				1/1	
rev. description date name					part no.: 33MUBRS1-05SN2