

**FBC PA M12 FM 10M**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

**General ordering data**

Type	FBC PA M12 FM 10M
Order No.	<a href="#">1785111000</a>
Version	Bus line, One end without connector, M12, No. of poles: 2, 10 m, Female socket, straight, shielded: Yes, LED: No, Sheath material: PVC, Halogen: Yes
GTIN (EAN)	4032248194780
Qty.	1 pc(s).

**FBC PA M12 FM 10M**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Technical data**
**Dimensions and weights**

Length	10,000 mm	Net weight	842 g
--------	-----------	------------	-------

**Technical specifications for cable**

No. of poles shielded	2 Yes	Core cross-section	1 mm <sup>2</sup>
Colour coding	Red, Green	Insulation	PE
Sheathing colour	Black	Sheath material	PVC
Cable length	10 m	Outer diameter	8.0 ± 0.4 mm
Temperature range, moving, max.	60 °C	Temperature range, moving, min.	-5 °C
Temperature range, stationary, max.	80 °C	Temperature range, stationary, min.	-30 °C
Suitable for cable carriers	No	Halogen	Yes
Bending radius, min., stationary	8 x Kabeldurchmesser	Torsion resistance	0 °/m
Resistant to welding beads	No	Bending radius, min., moving	8 x Kabeldurchmesser

**General technical data**

Version	Female socket, straight	Contact tube diameter	M12
Housing main material	PUR	Threaded ring material	Brass, nickel-plated
Coding	A	Protection degree	IP 67
Contact surface	Gold-plated	LED	No
Rated voltage	100 V	Insulation resistance	10 <sup>8</sup> Ω
Temperature range of housing	-25...+80 °C	Tightening torque	M12: 0.8 - 1.2 Nm
Plugging cycles jumpered	≥ 100 No	Pollution severity	3

**Classifications**

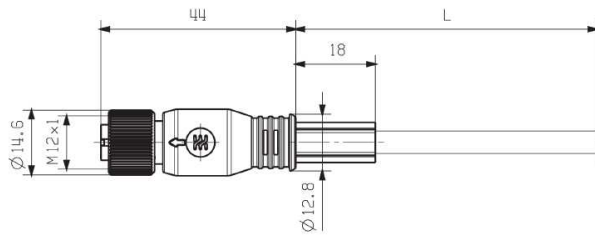
ETIM 3.0	EC000237	UNSPSC	26-12-16-03
eClass 5.1	27-25-02-01	eClass 6.2	27-06-03-07
eClass 7.1	27-06-03-07		

**Approvals**


Approvals	
ROHS	Conform

**FBC PA M12 FM 10M**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings****Dimensioned drawing**

Straight socket

**Circuit diagram****Pole scheme**

Socket

**The ideal tool, the Screwty® with torque function**

Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F