

FG22X5R1C336MNT00




Application

Commercial Grade

Series

FG22

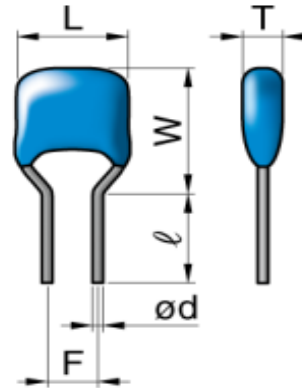

Dimensions

- L 7.5mm Max.
- W 8.5mm Max.
- T 4.5mm Max.
- F 5mm +/-1mm
- d 0.5mm +0.1,-0.03mm
- l 7mm +/-2mm

Temperature Characteristic

-55 to 85°C +/-15%

Rated Voltage

16Vdc

Capacitance

33uF

Capacitance Tolerance

+/-20%

Dissipation Factor

7.5% Max.


Insulation Resistance

3Mohm Min.


AEC-Q200

No


|Z| vs. Freq. Characteristic

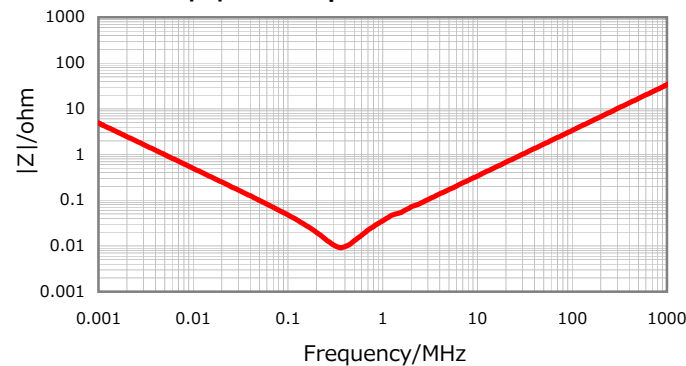


DC Bias Characteristic

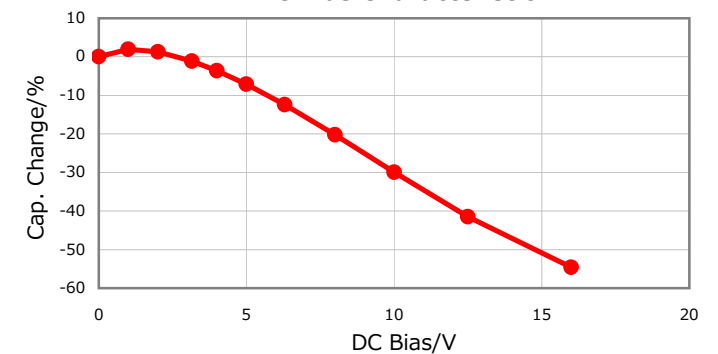

Cap. vs. Freq. Characteristic

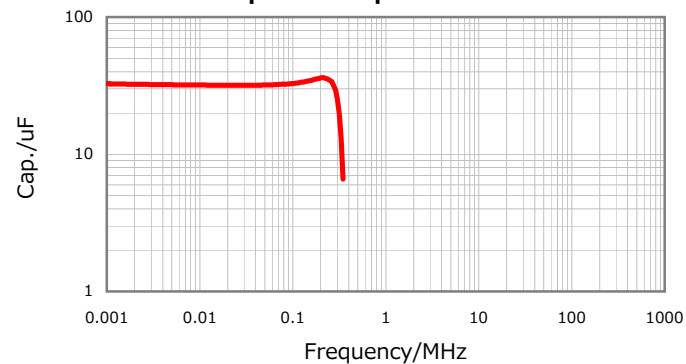

Temperature Characteristics

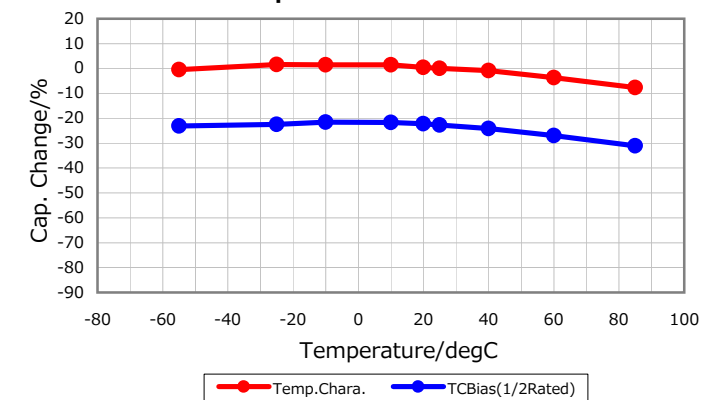

Characterization Sheet (MLCC with Dipped Radial Lead)



All specifications are subject to change without notice.

December 28, 2015