

NOTES:

1.0 SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: DC to 500 MHz
- 1.2 VSWR (MAX.): 1.25:1
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 MAXIMUM INPUT POWER:
2 WATTS AVERAGE AT +25°C DERATED
LINEARLY TO 0.5 WATTS AT +125°C.
- 1.5 OPERATING TEMPERATURE RANGE:
-55°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN.
(REF: INK-03264-27-02)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

SMA FEMALE CONN.
PER MIL-PRF-39012

O-RING SEAL

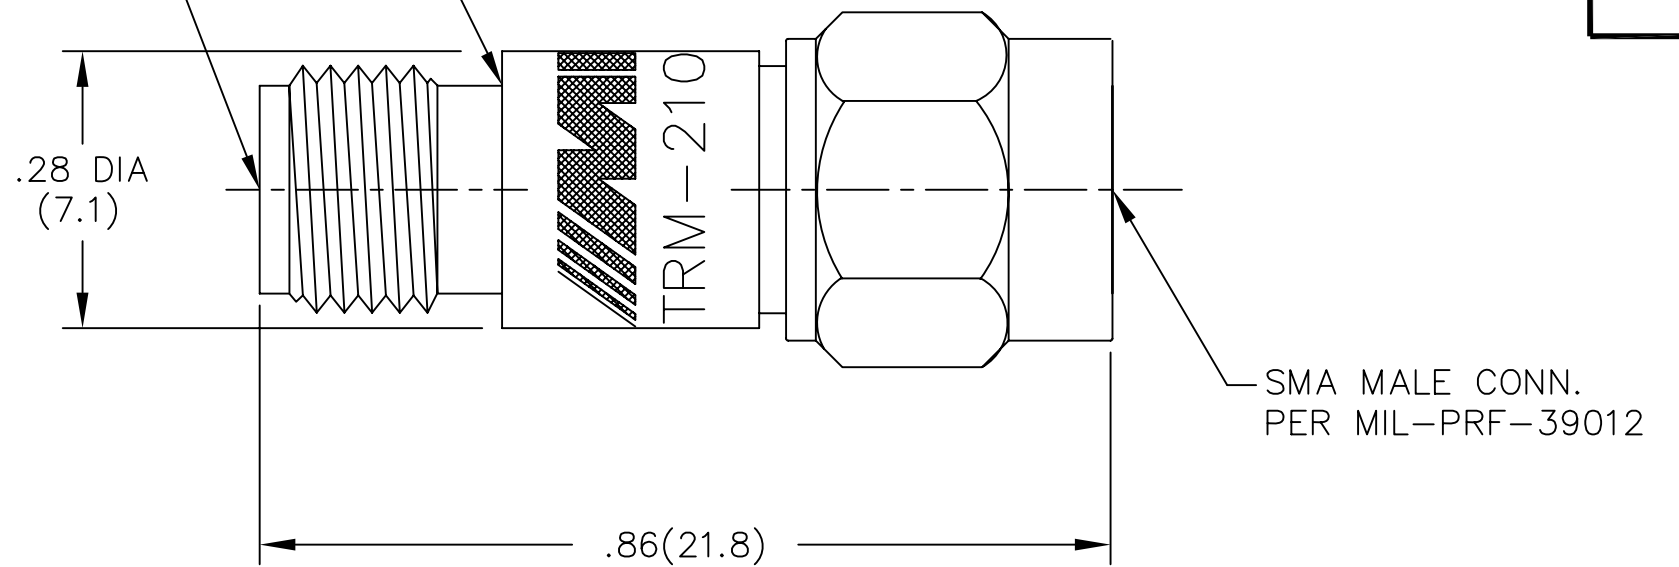

MODEL NUMBER	TRM-2106-MF-SMA-02
REV.	D

REV.	DESCRIPTION	DATE
-	RELEASED	8/29/84
A	ECR 6545	7/3/89
A1	UPDATE MODEL NO.	1/5/93
B	ECN 13551	5/18/94
C	ECN 15237	5/14/96
D	ECN 19434	10/15/03

DWG. NO. WAS: 05520-01-00

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
	DRAWN/DATE M.HOLLMAN 5/18/94	ENG./DATE G.KOZAK 5/19/94	DRAWING NUMBER TRM-2106-MF-SMA-02	
	CHECKED/DATE A.BEATTY 5/18/94	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1